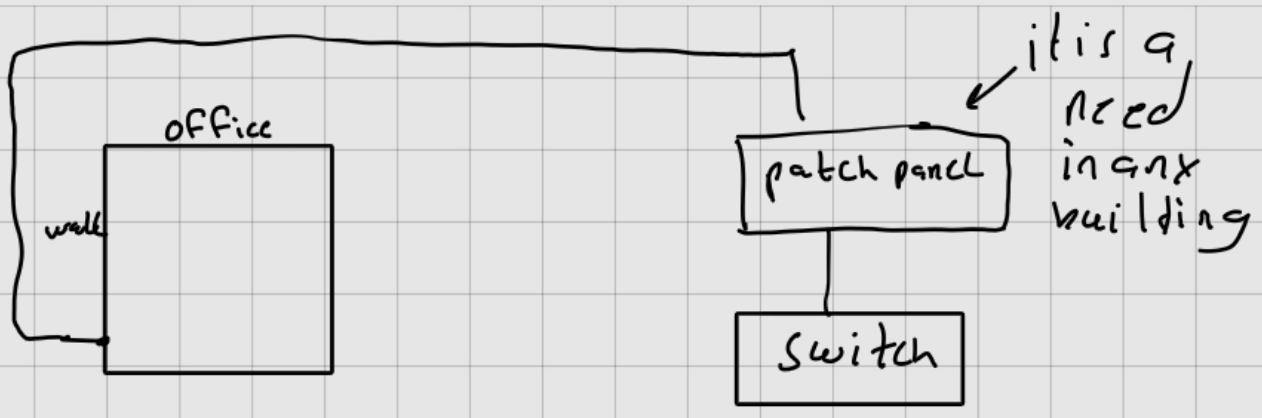


→ How switches learn MAC address?


→ Show mac address-table (?)

→ the table will show static & dynamic
- static: not needed inside the switch
- dynamic: the need which the switch is learning

→ if two interfaces have same MAC address → connected to a switch

→ if there is no packets yet → the switch didn't learn the devices's MAC address yet

→ if the computer is quite for aging time (def = 300s) the computer will be removed

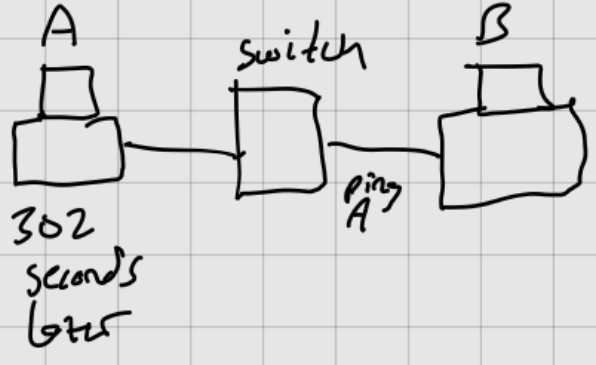→ 

the switch will flood it Broadcast it

→ clear MAC-address dynamic → clear & re-learn

→ one of the switches is blocked because of spanning tree protocol

MAC address Table viewing:

- There is a difference in format between `cisco abcd.efgh` and `windows ab-cd-ef-gh`
- most useful one is:
  Show mac address-table interface (Fa, G, multilink)
  - | output modifiers
  - Show mac address-table | include
    - that include this (A B) e.g.
      in them
  - | include in any command for any type of filtering
- if you know only the ip address of some device:
  - ping ip
  - arp -a

→ locating devices on a network switch

→ to know where the mac address is use

Show mac address-table dynamic (include fdlc

→ to see if anything else is connected:

Show mac address-table interface Fa 0/13

→ if there is multiple MAC addresses < another switch / WAP

→ use

Show cdp neighbors

↳ shows the device + which interface

→ use

Show cdp neighbors detail

to know the ip of the switch to telnet it