




CONNECTORS

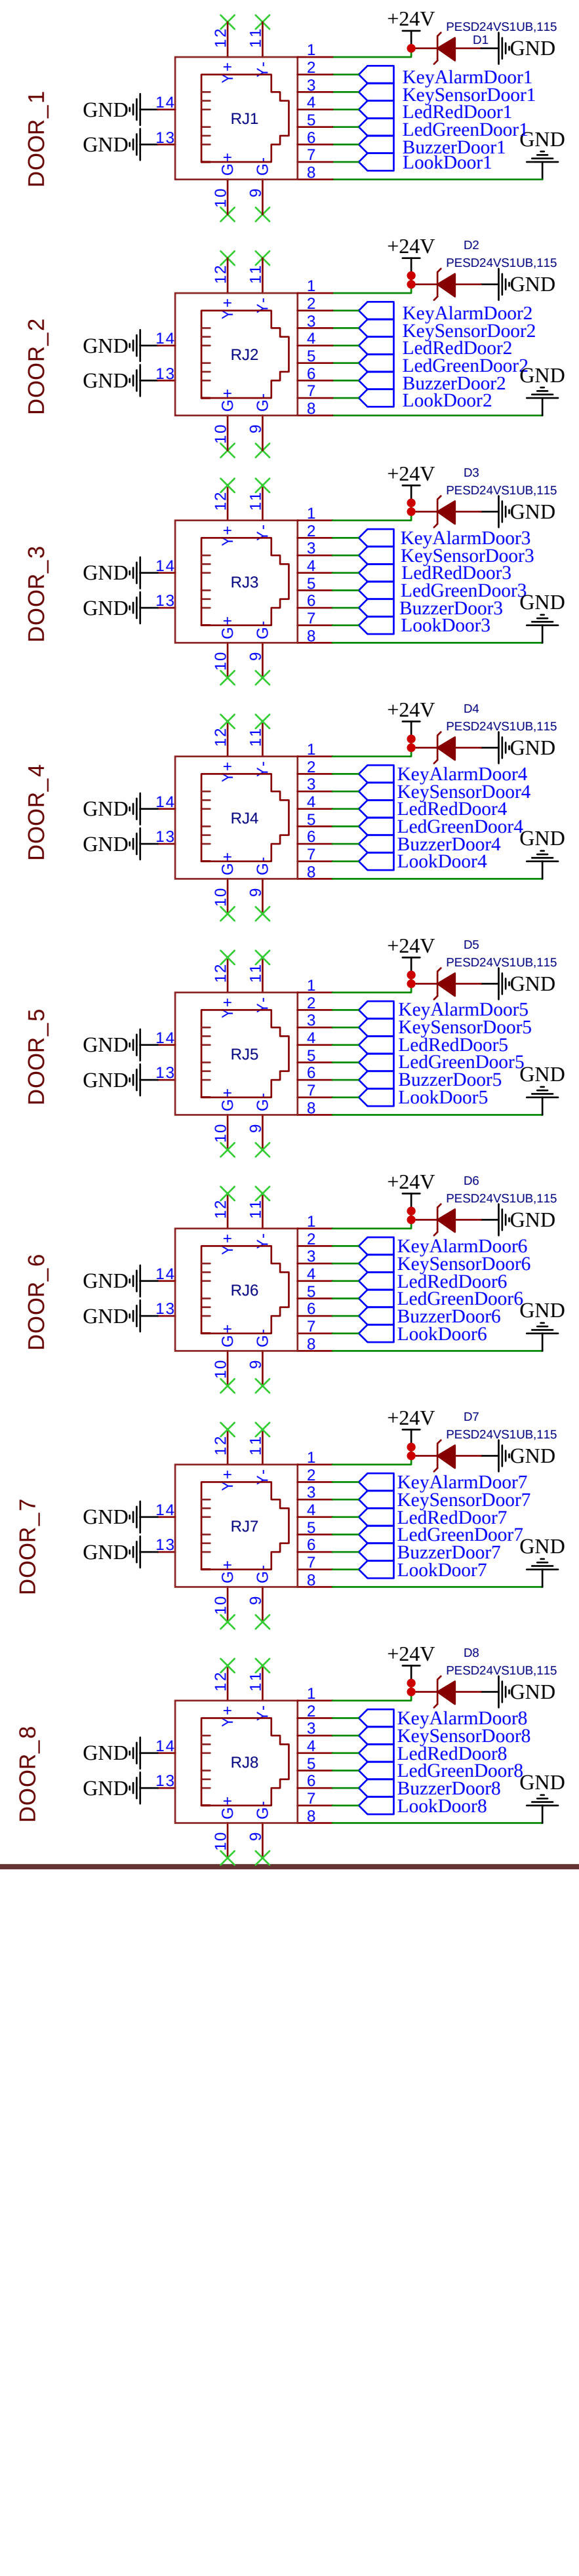


INPUTS

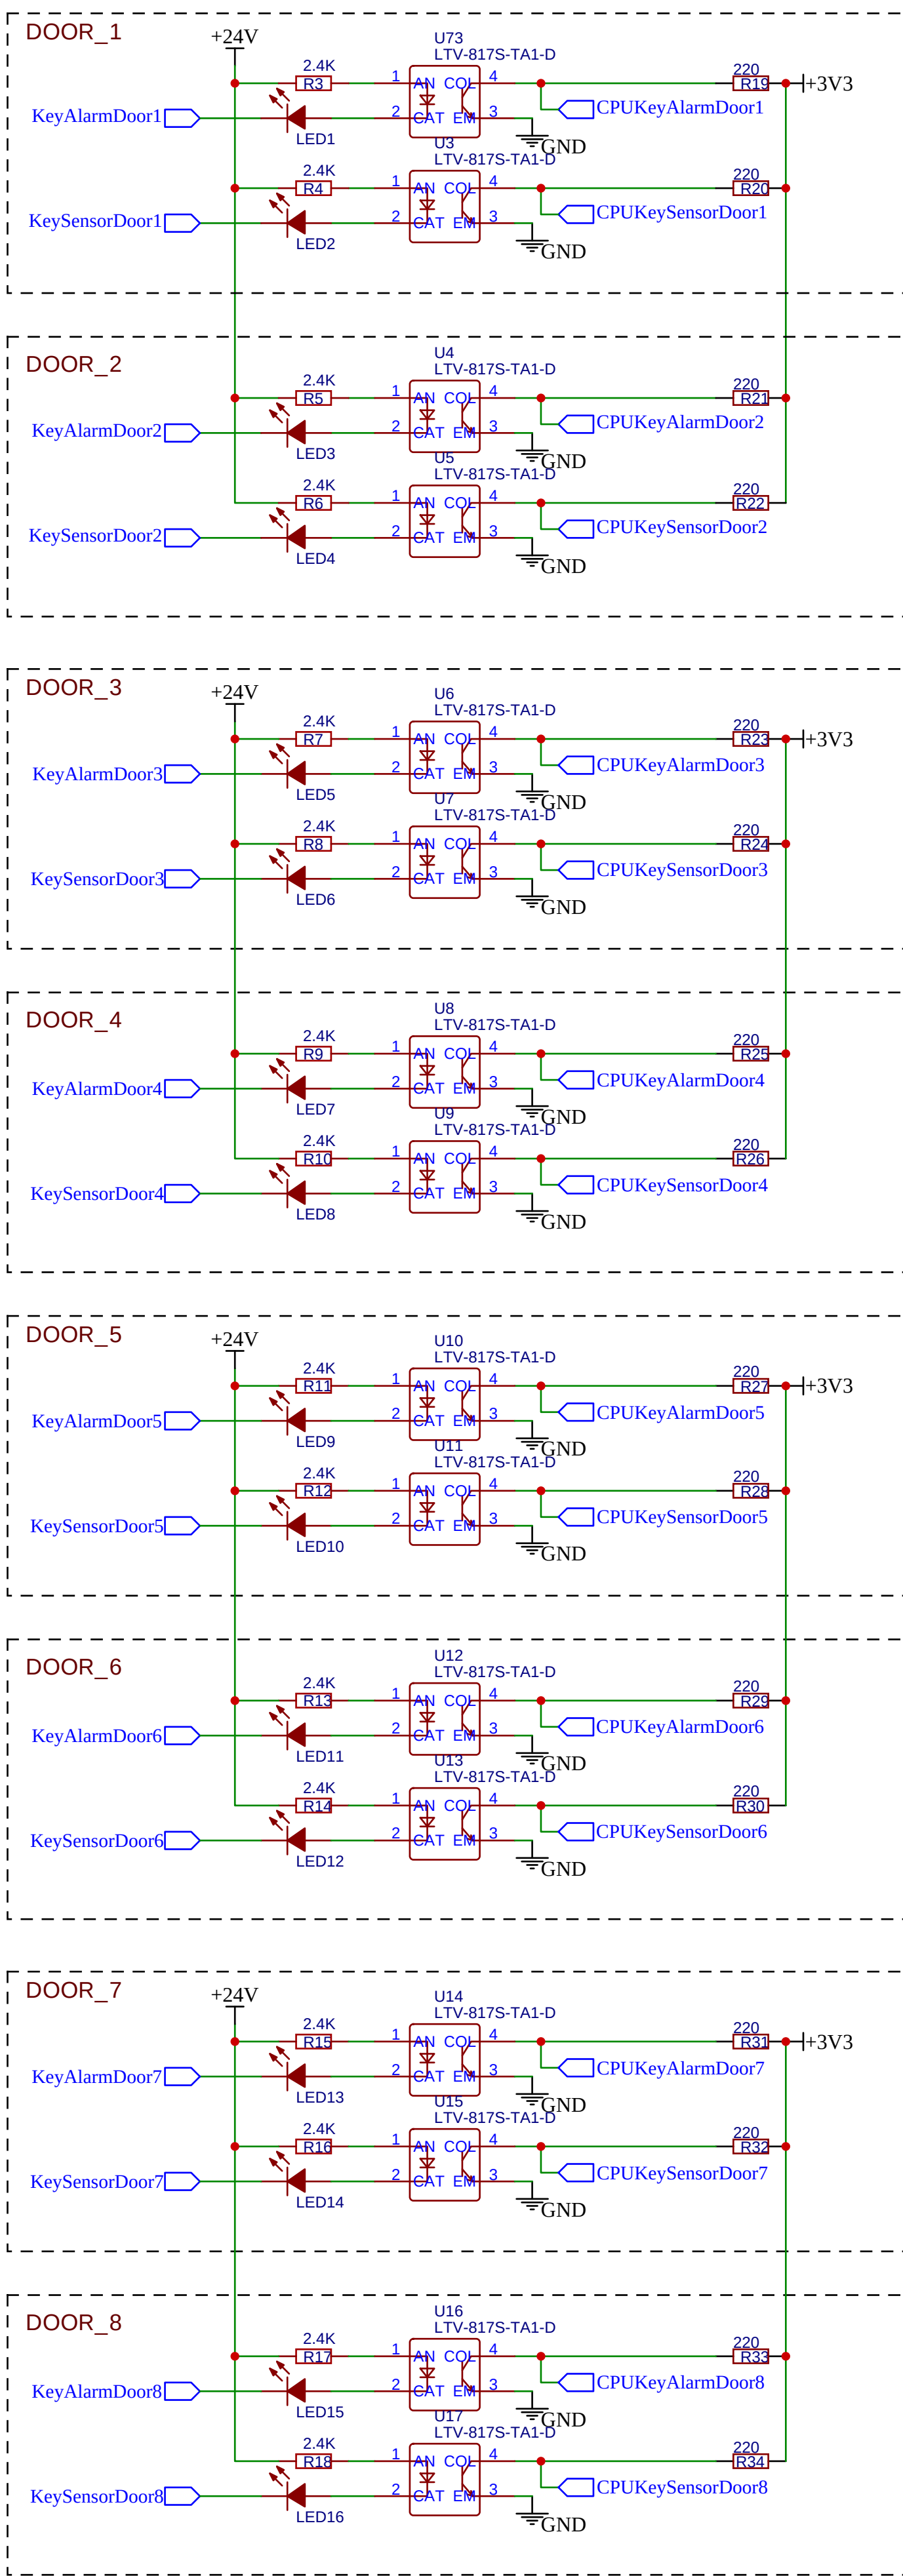


OUTPUTS

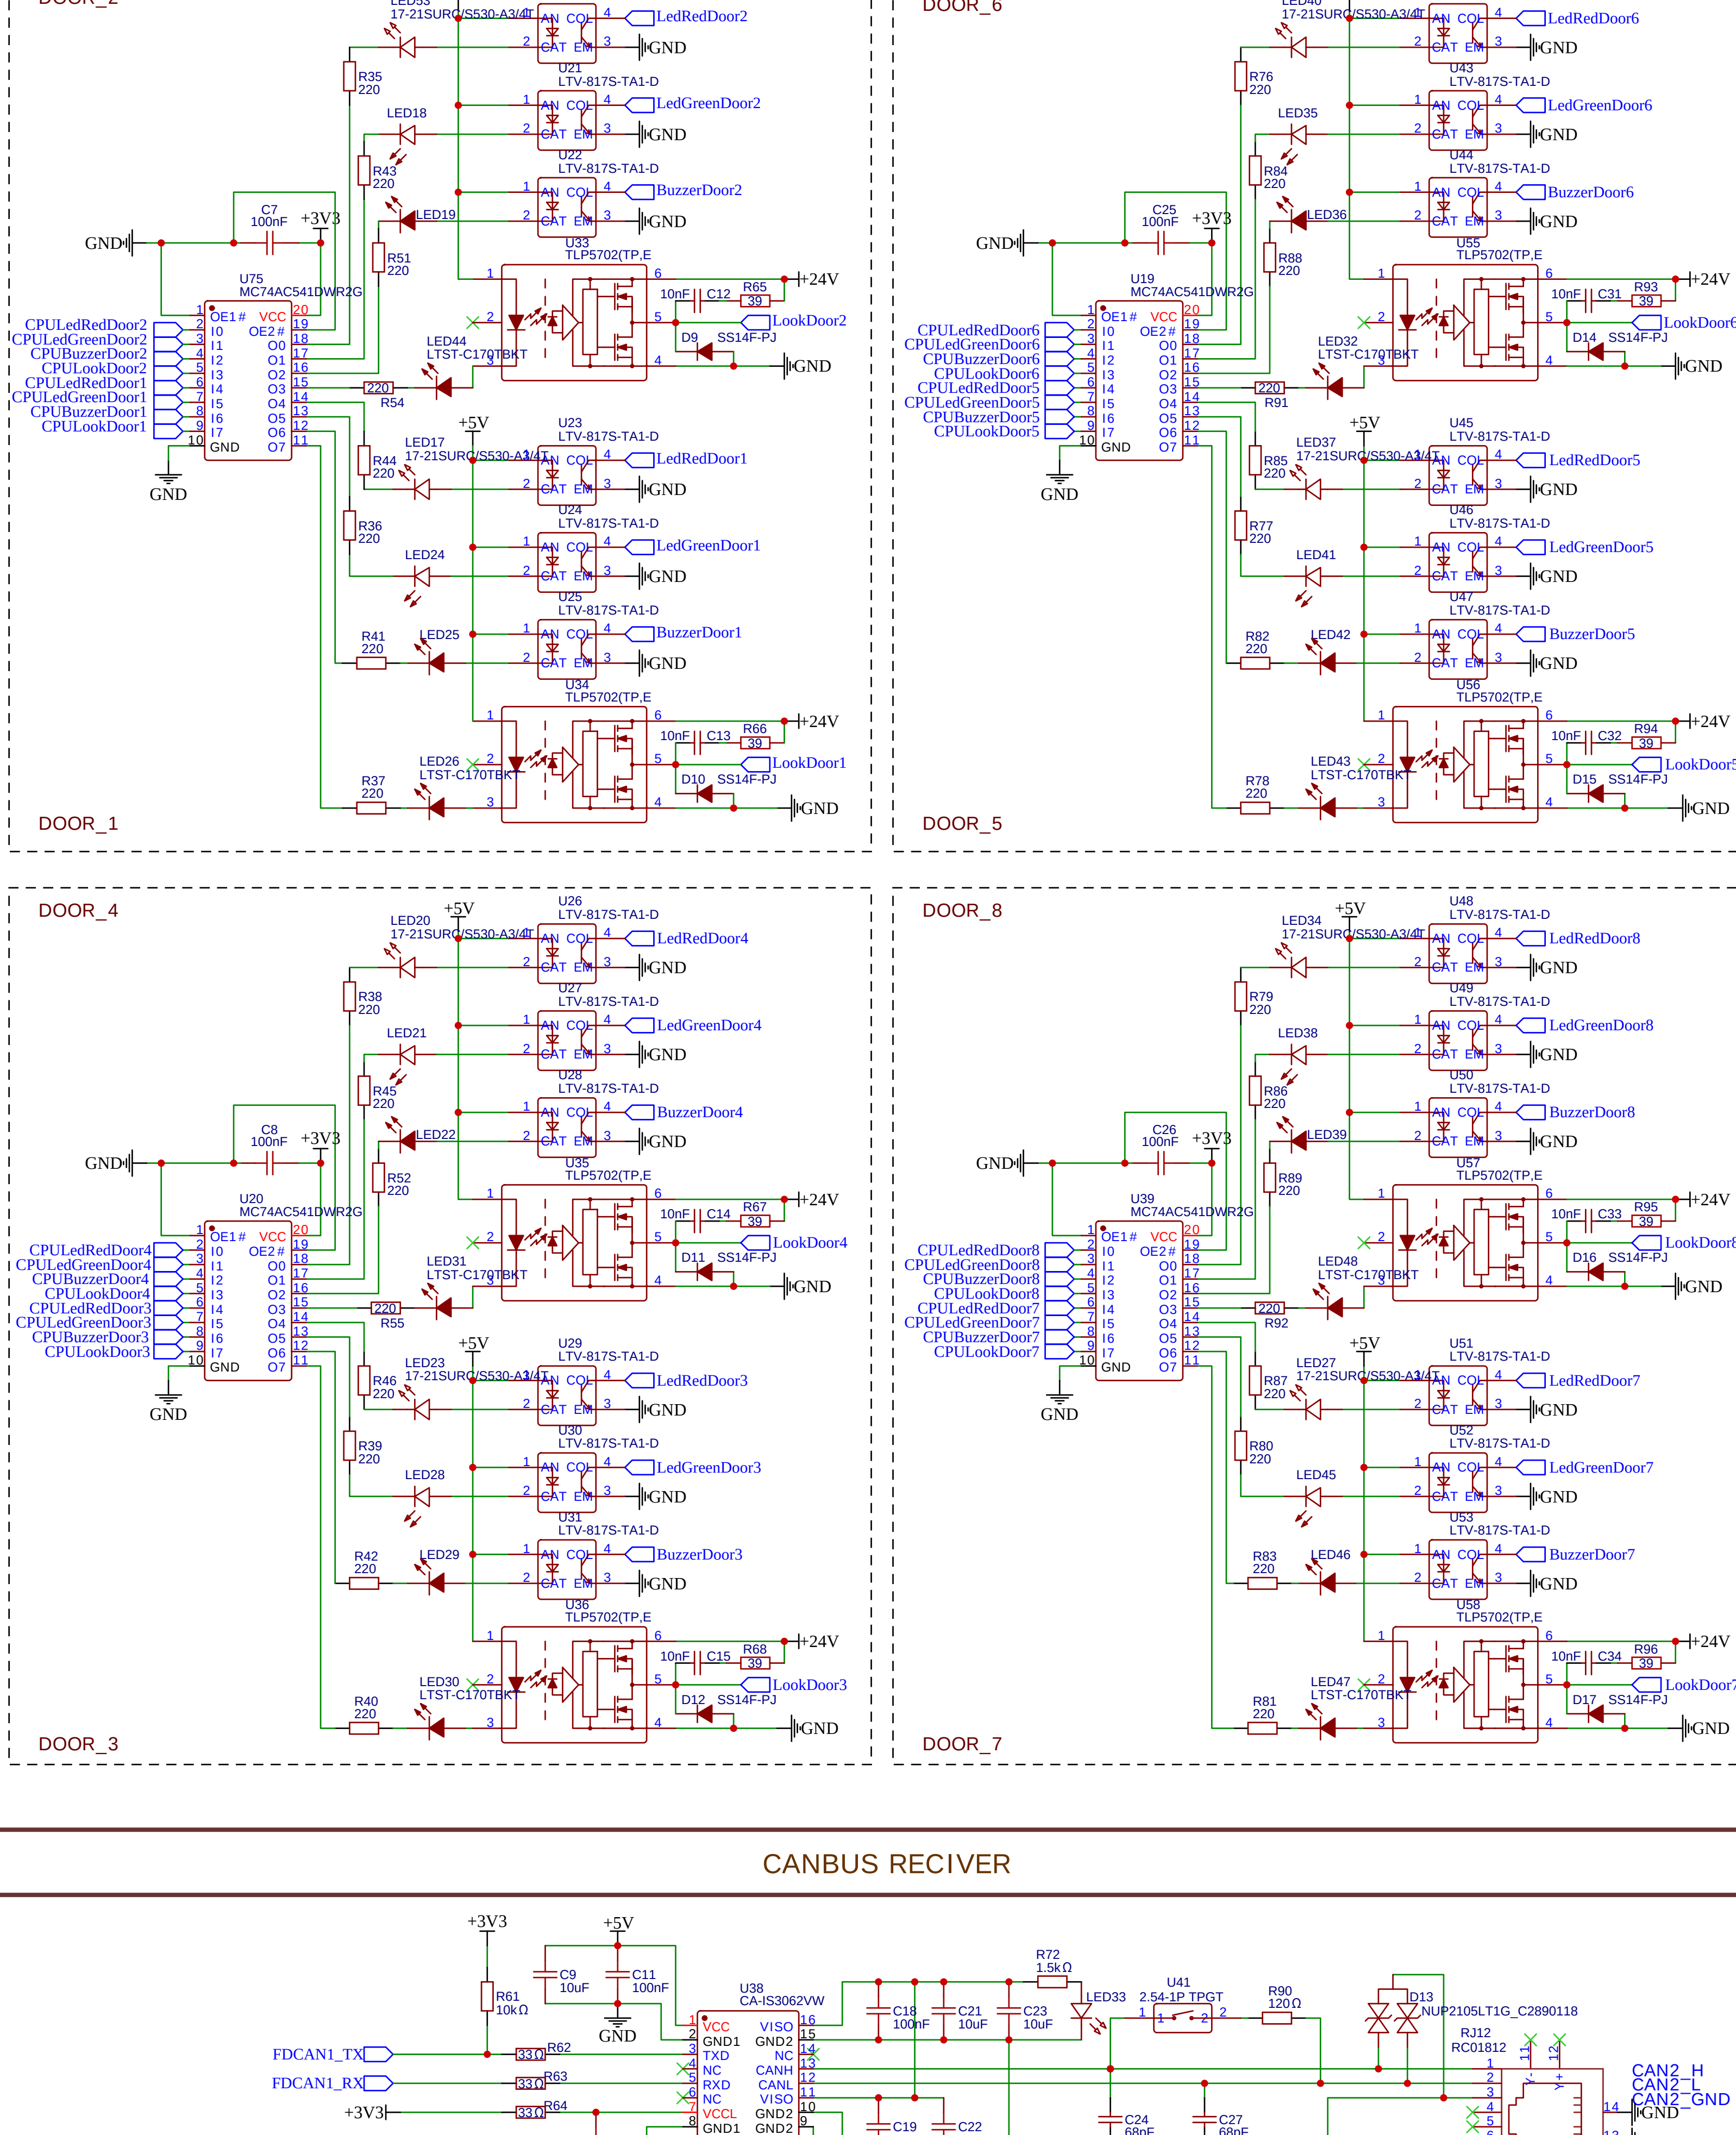


CANBUS RECIVER

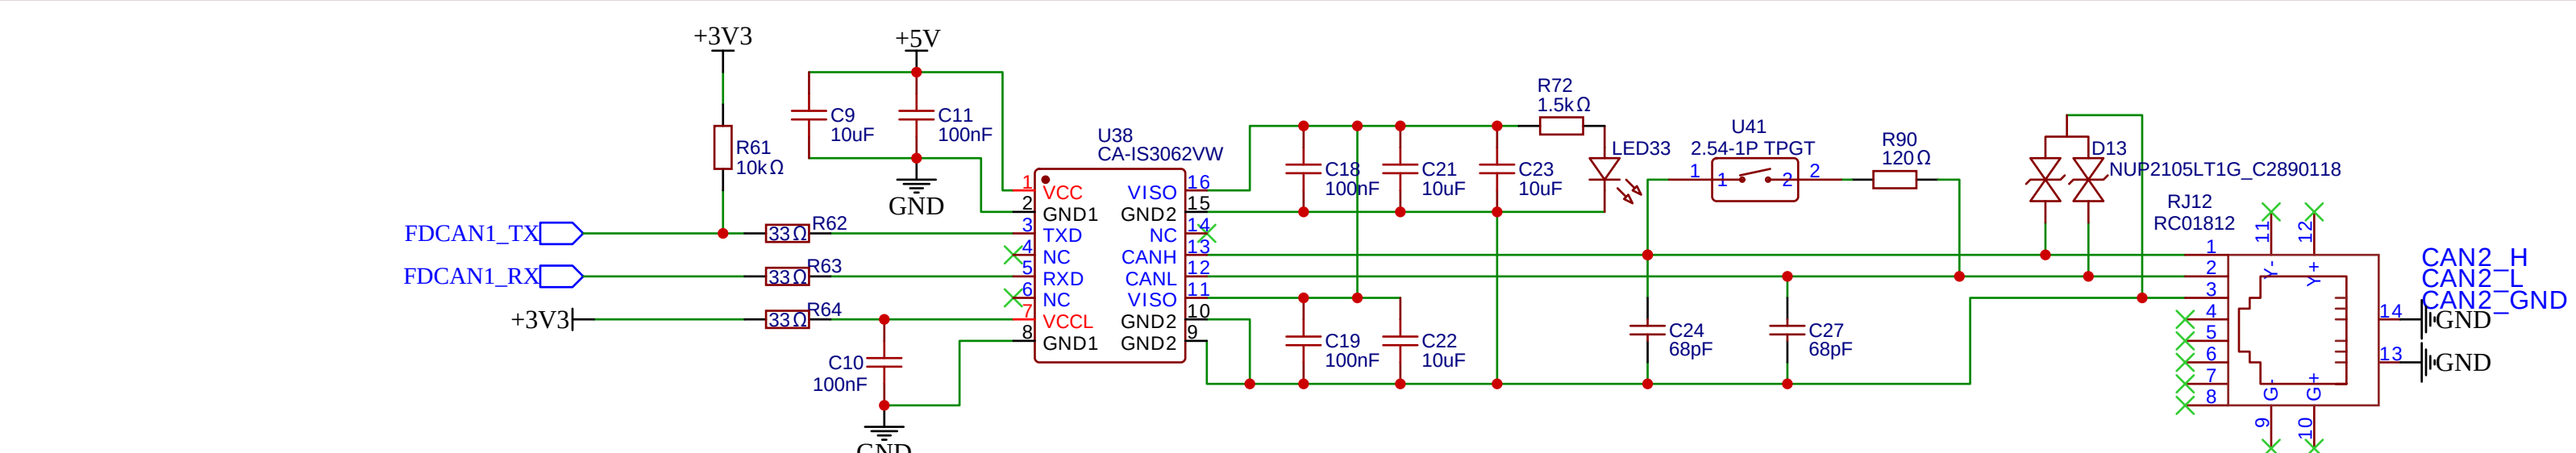


QSPIFLASH

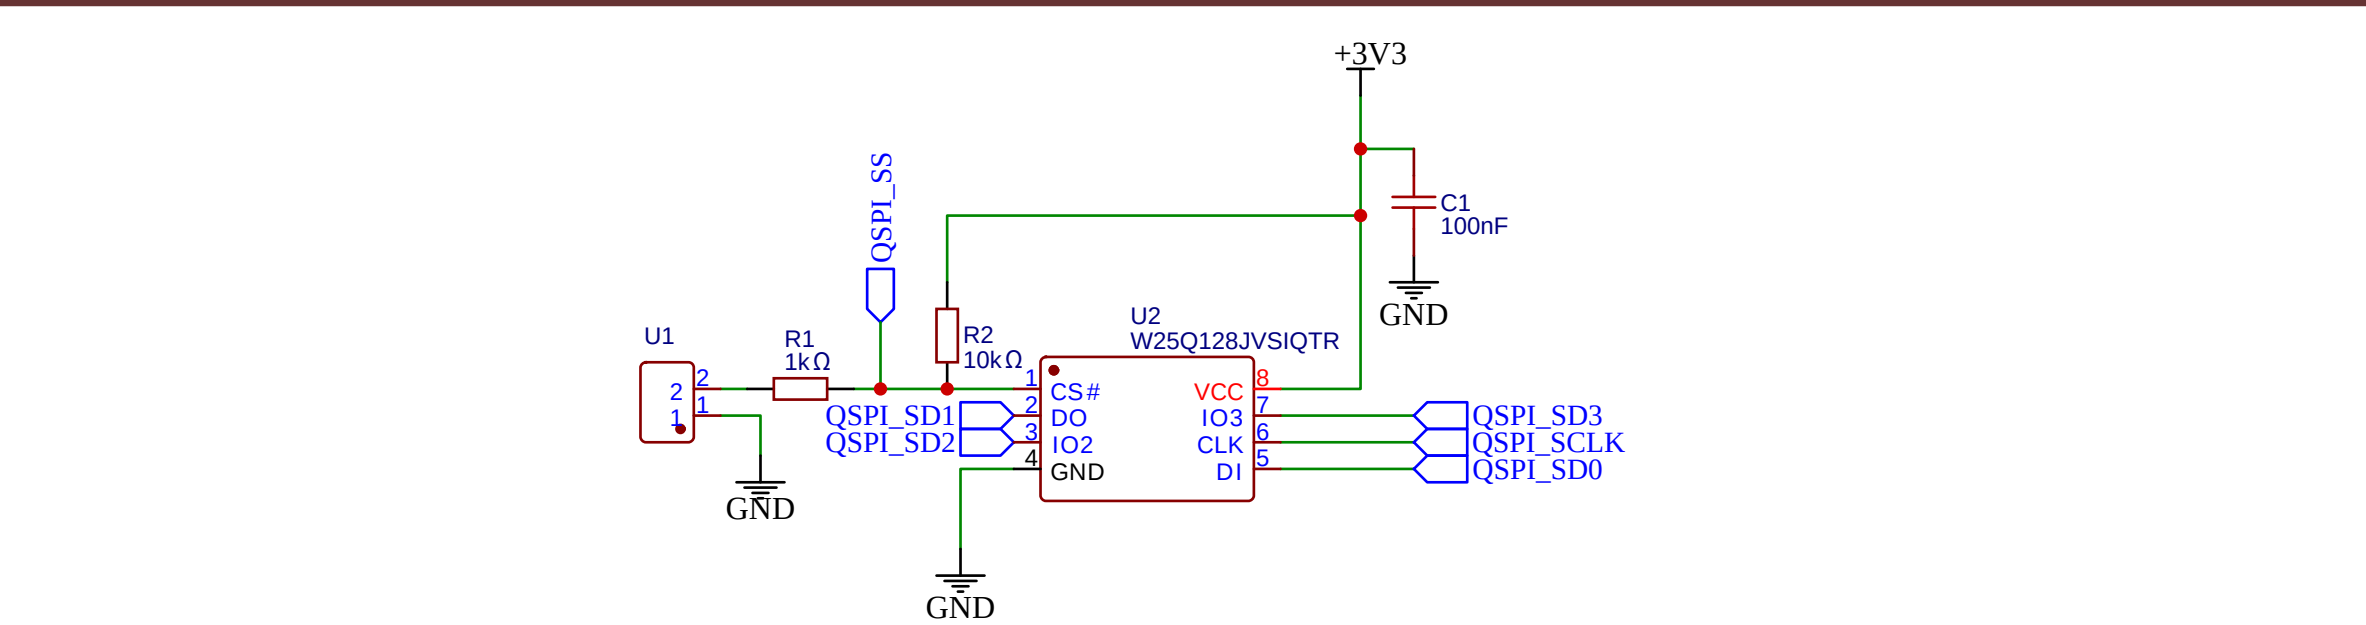


Ethernet

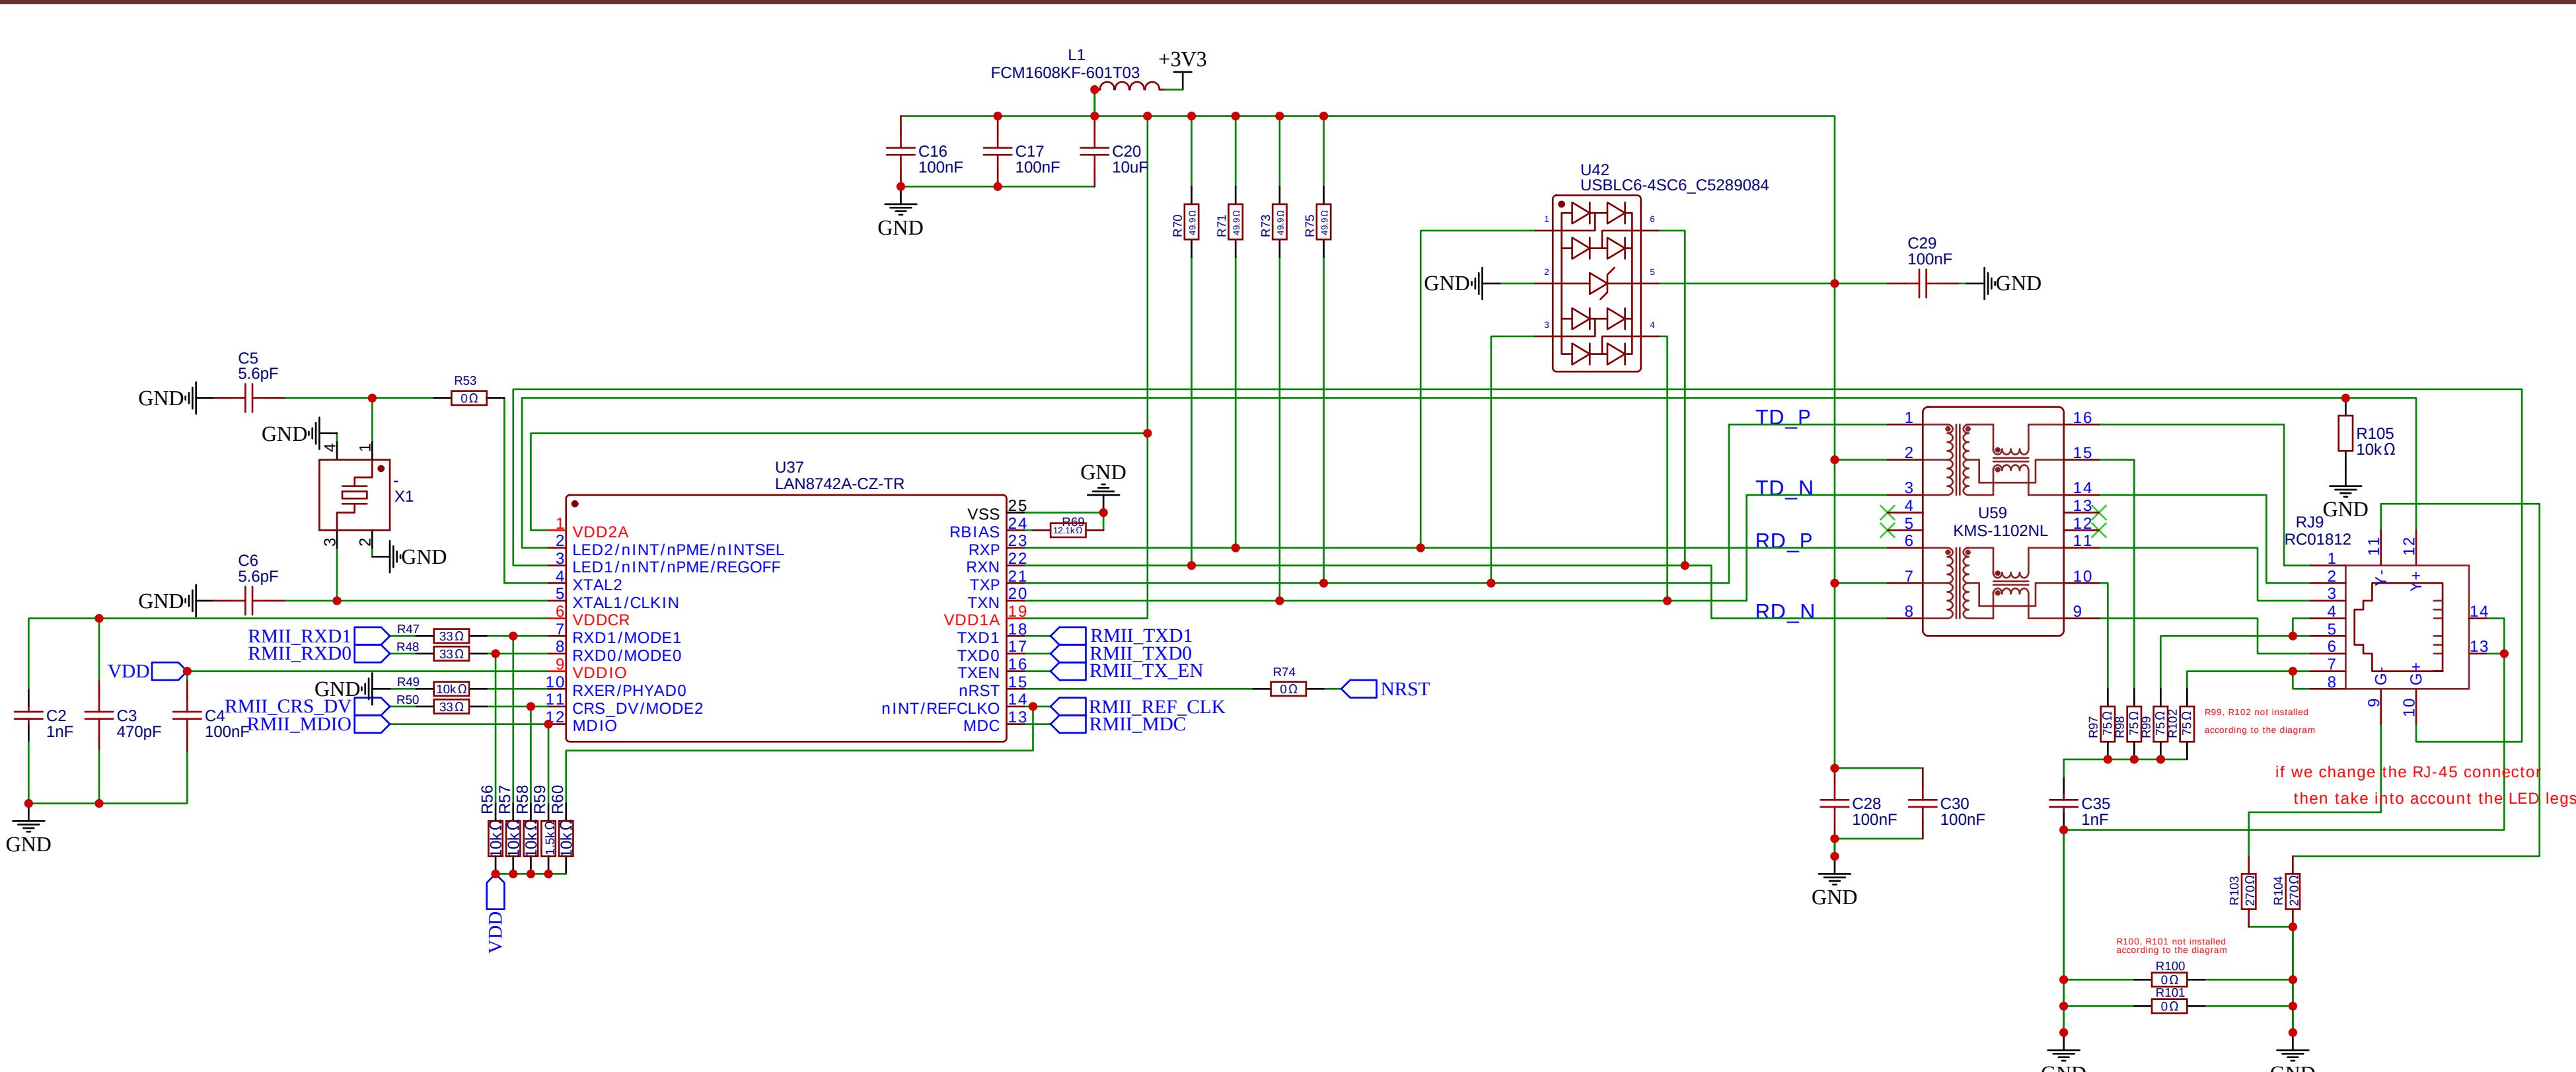


POWER MCU

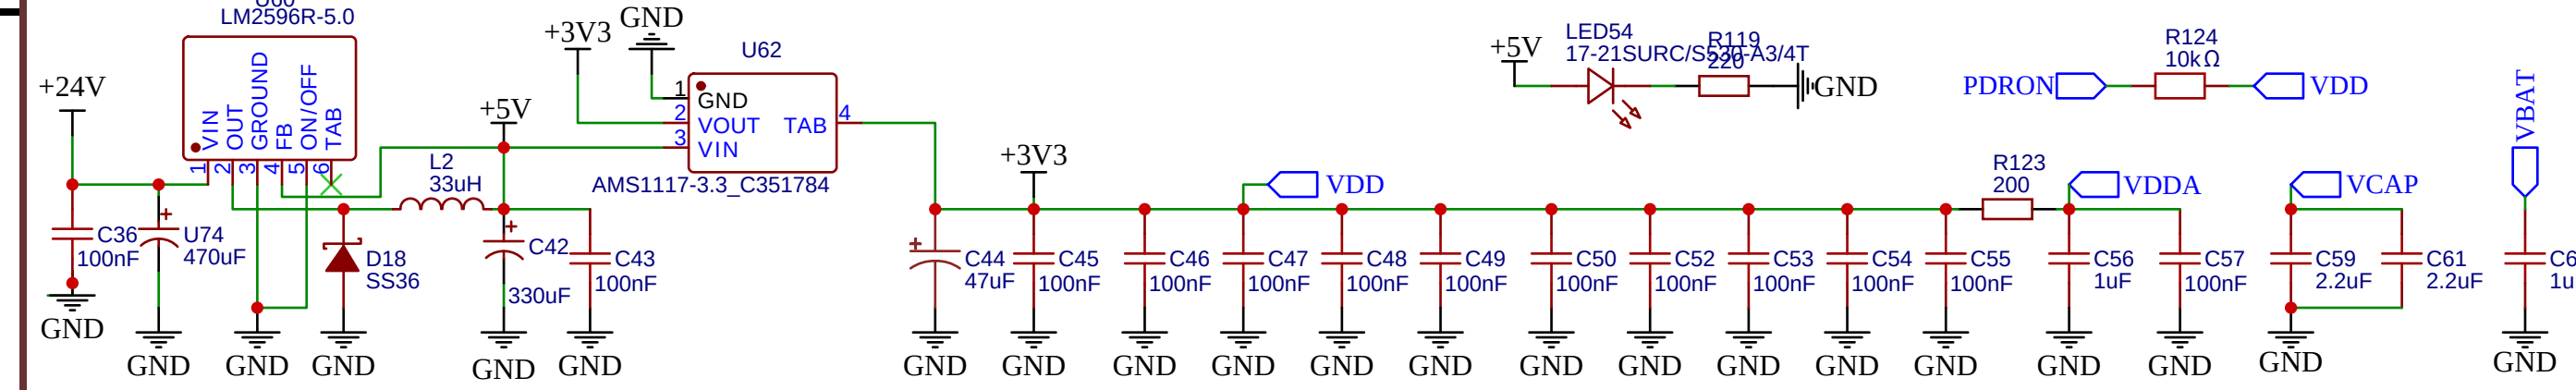



TRANSCEIVERS

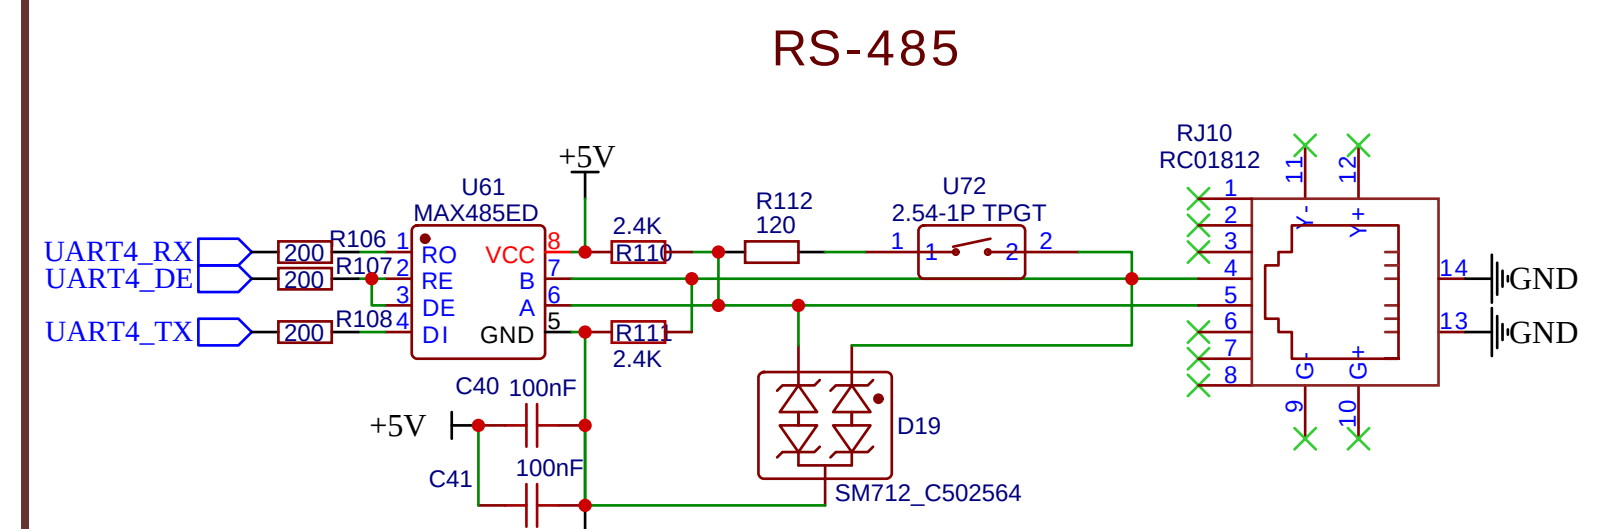


POWER 24VDC

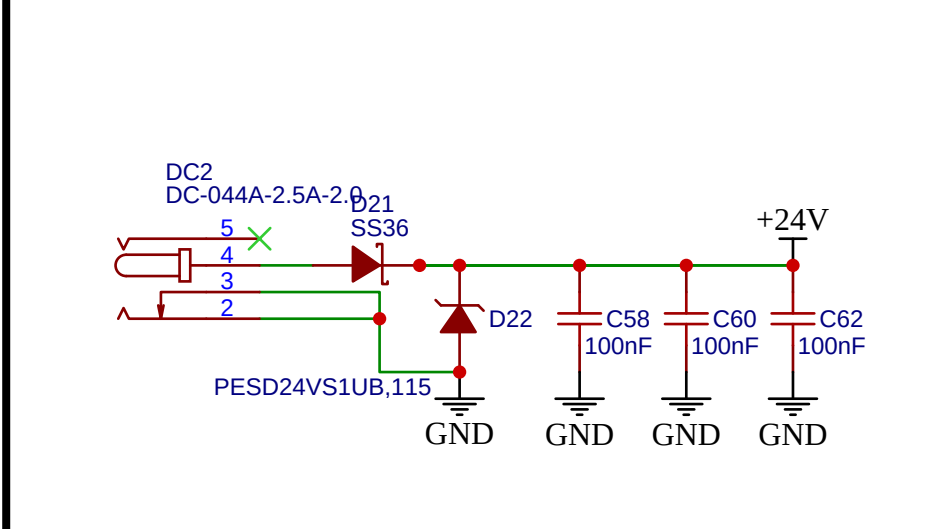


CPU

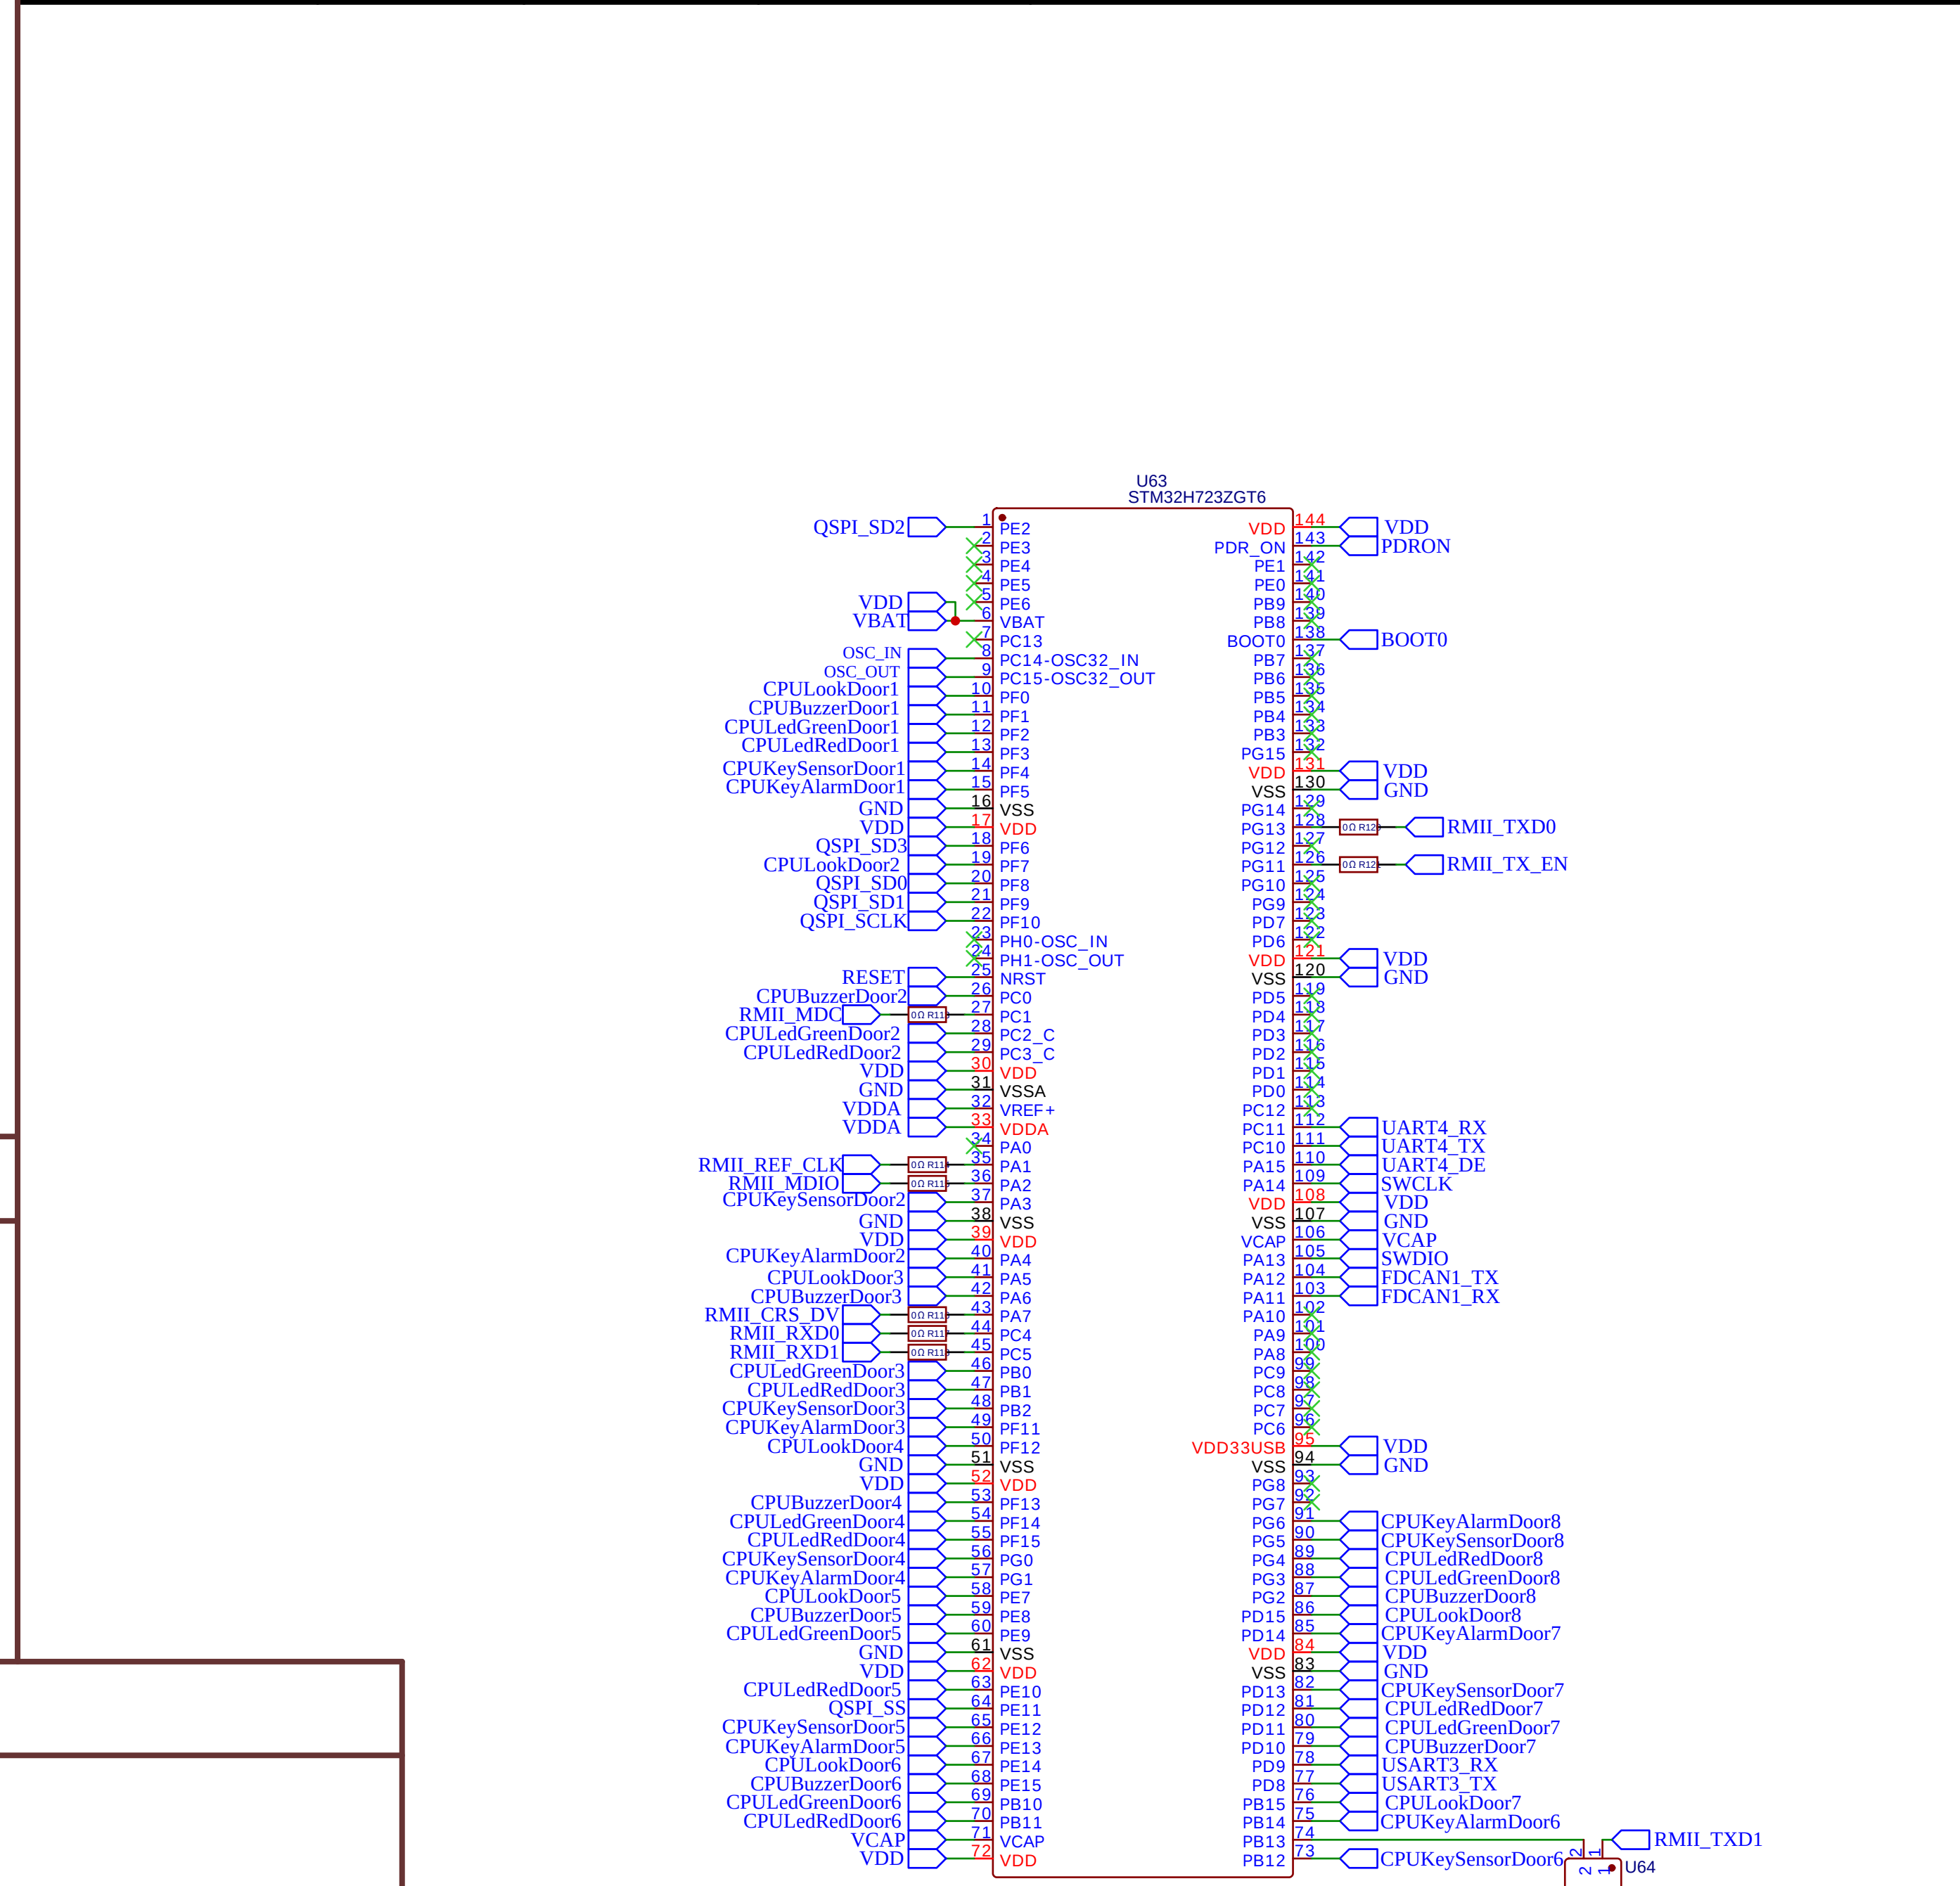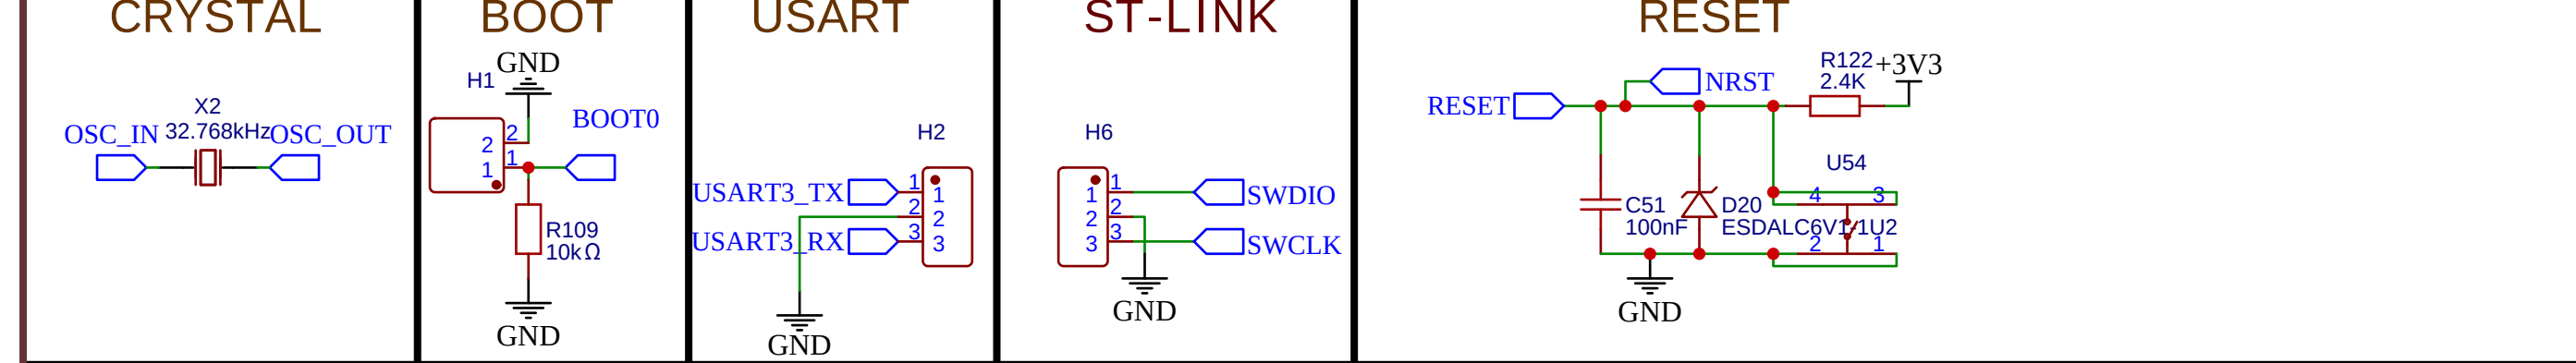

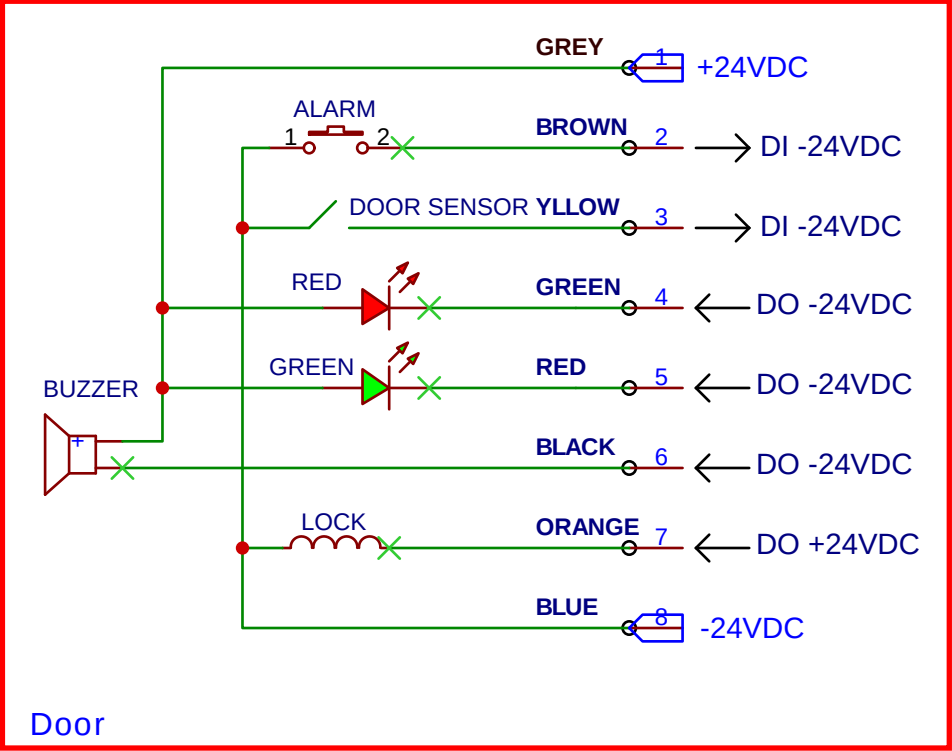


TITLE: Door connection diagram		REV: 1.0
	Company: Doors Control Making	Sheet: 2/1
	Date: 19/02/2025 Drawn By: info@dcmaking.co.il	

MCU PWR SUPPLIES

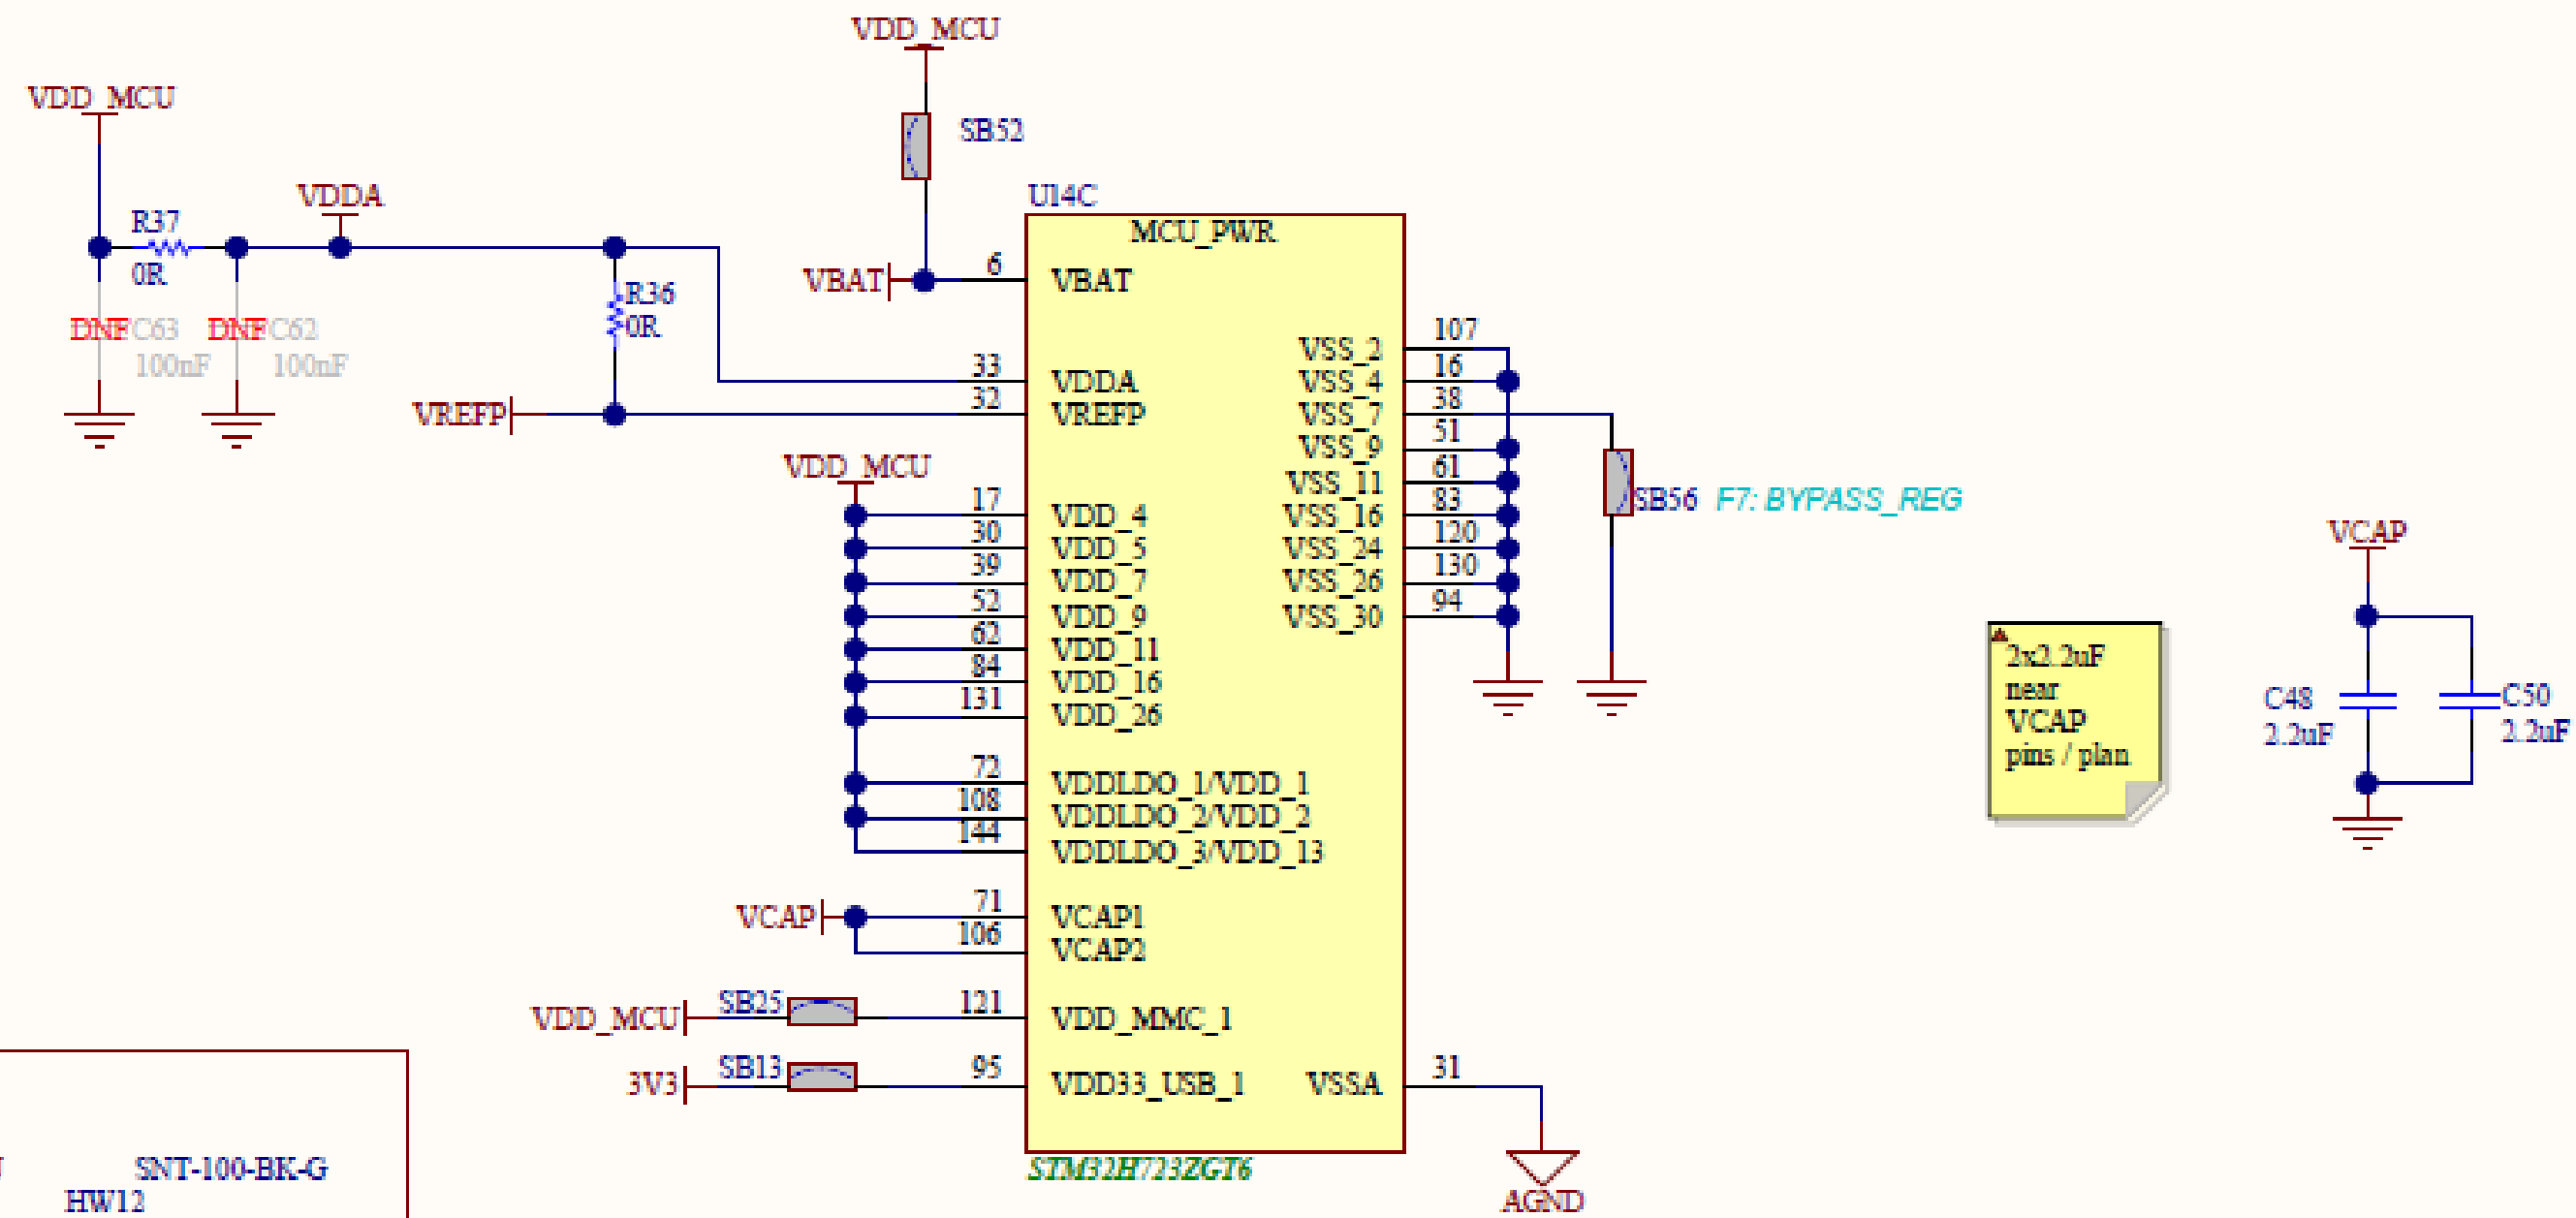


IDD Measurement

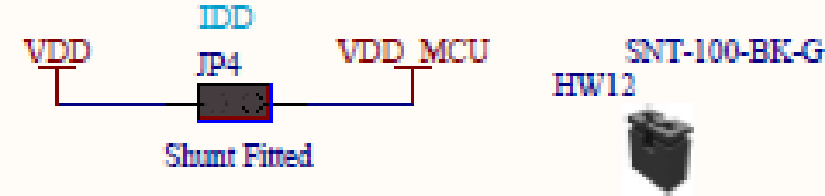

MCU DECAPS


Ceramic capacitor (Low ESR, ESR<1ohm)

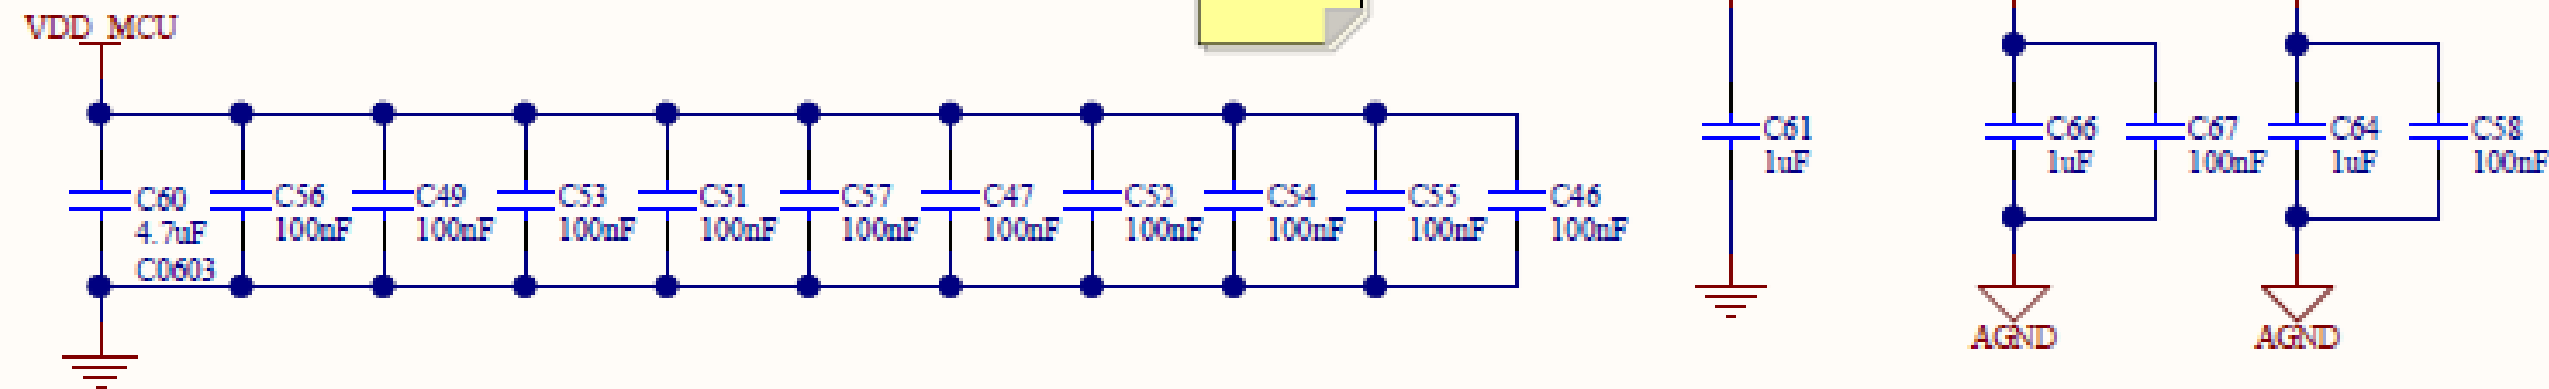


Title: **MCU 144 POWER**
 Project: **NUCLEO144 H7 LEGACY**
 Variant: **H723ZG**
 Revision: **E-01**
 Size: **A4** | Date: **16-OCT-2019** | Sheet: **4 of 9**




VIN / 5V PWR.

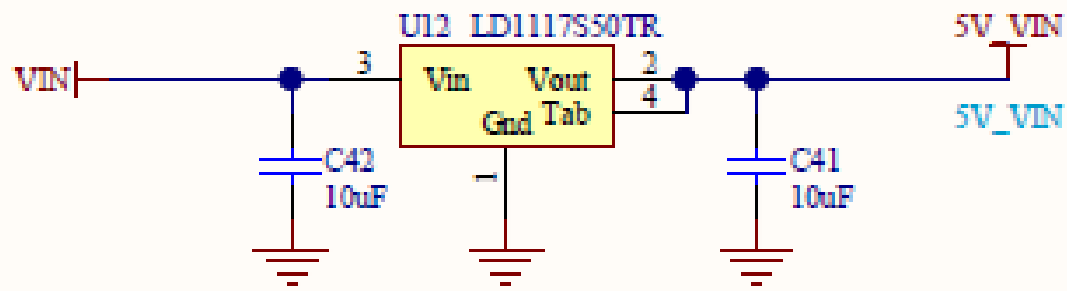



3V3 PWR.

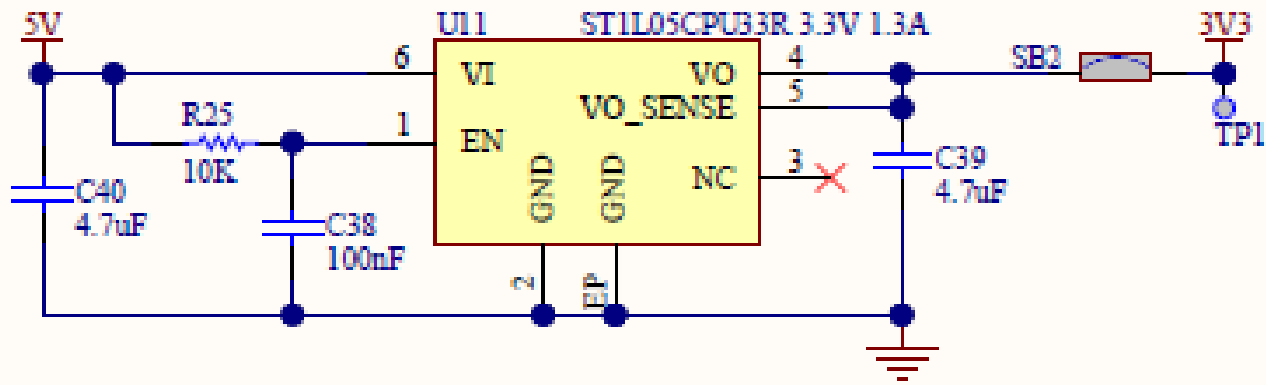

1V8 PWR.

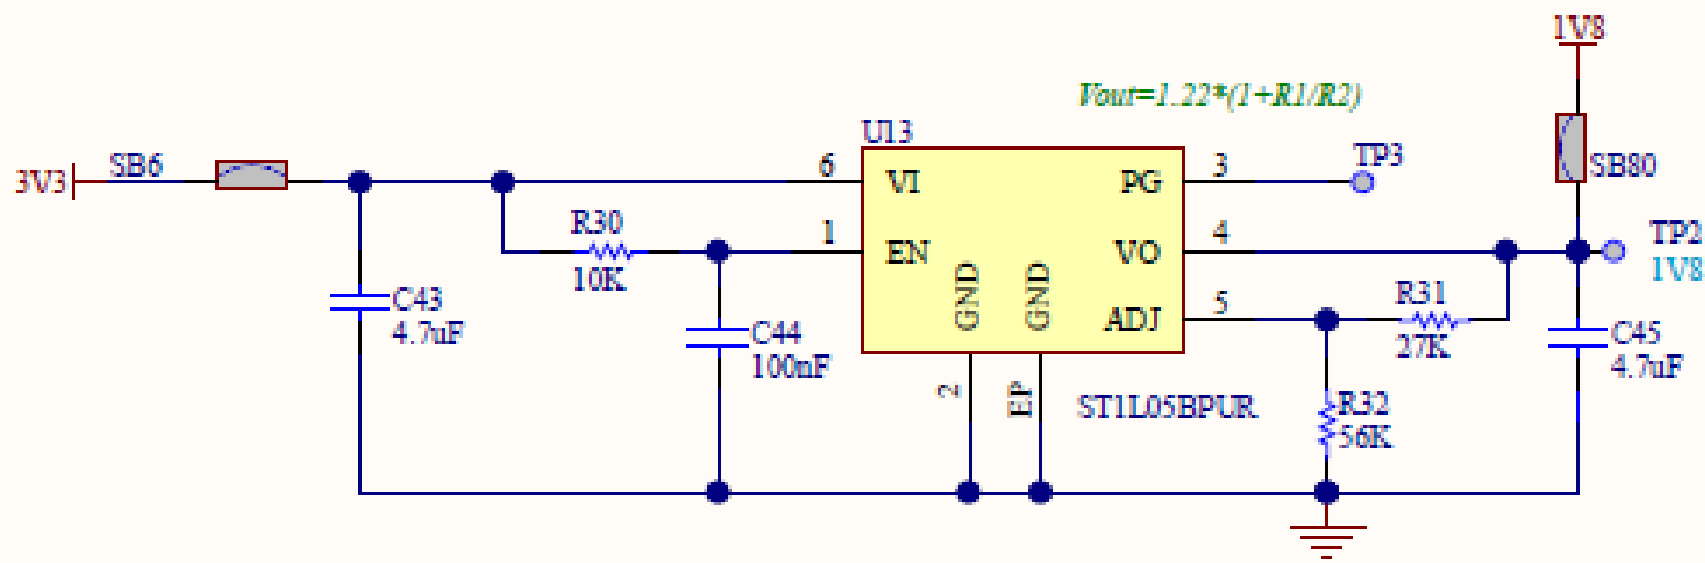

5V PWR SELECTION

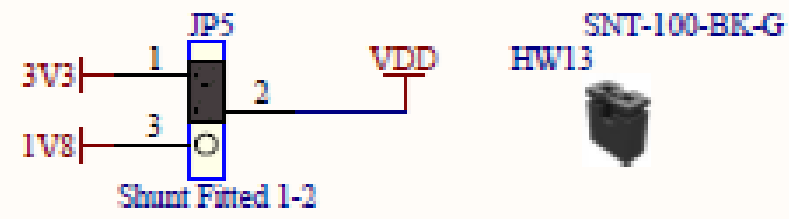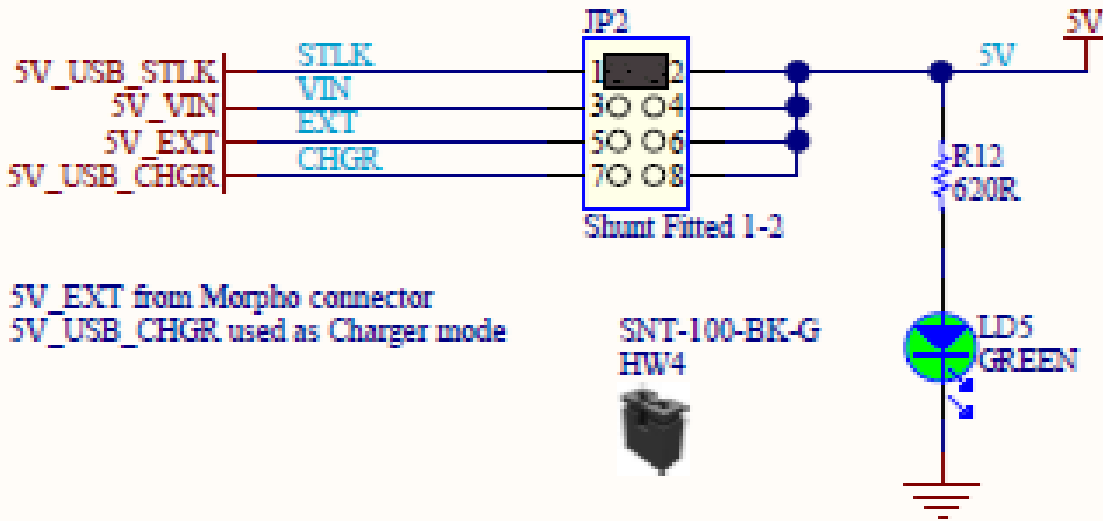


Title: MAIN POWER 5V / 3V3 / 1V8			
Project: NUCLEO 144 H7 LEGACY			
Variant: H7332G			
Revision: E-01		Reference: MBI304	
Size: A4	Date: 16-OCT-2019	Sheet: 8 of 9	


life.augmented

TITLE: MAIN POWER 5V / 3V3 / 1V8		REV: 1.0
	Company: Doors Control Making	Sheet: 4/1
	Date: 2025-02-19	Drawn By: morfey74

- микросхема CA-IS3062VW
- встроенный изолированный источник 5V
- изоляция 5000 Vrms




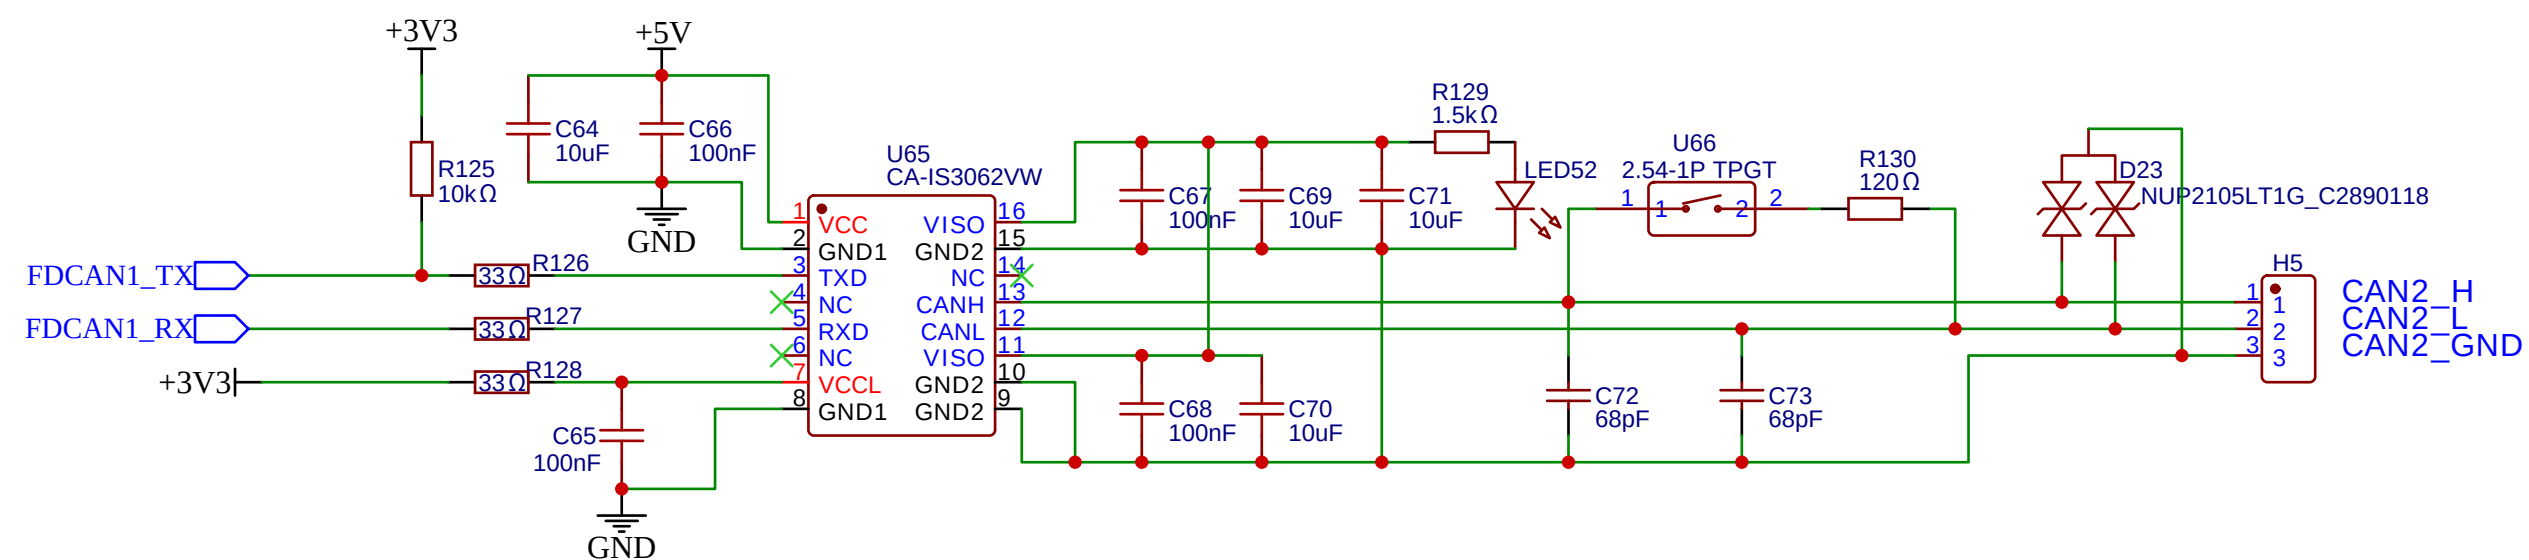



ETHERNET

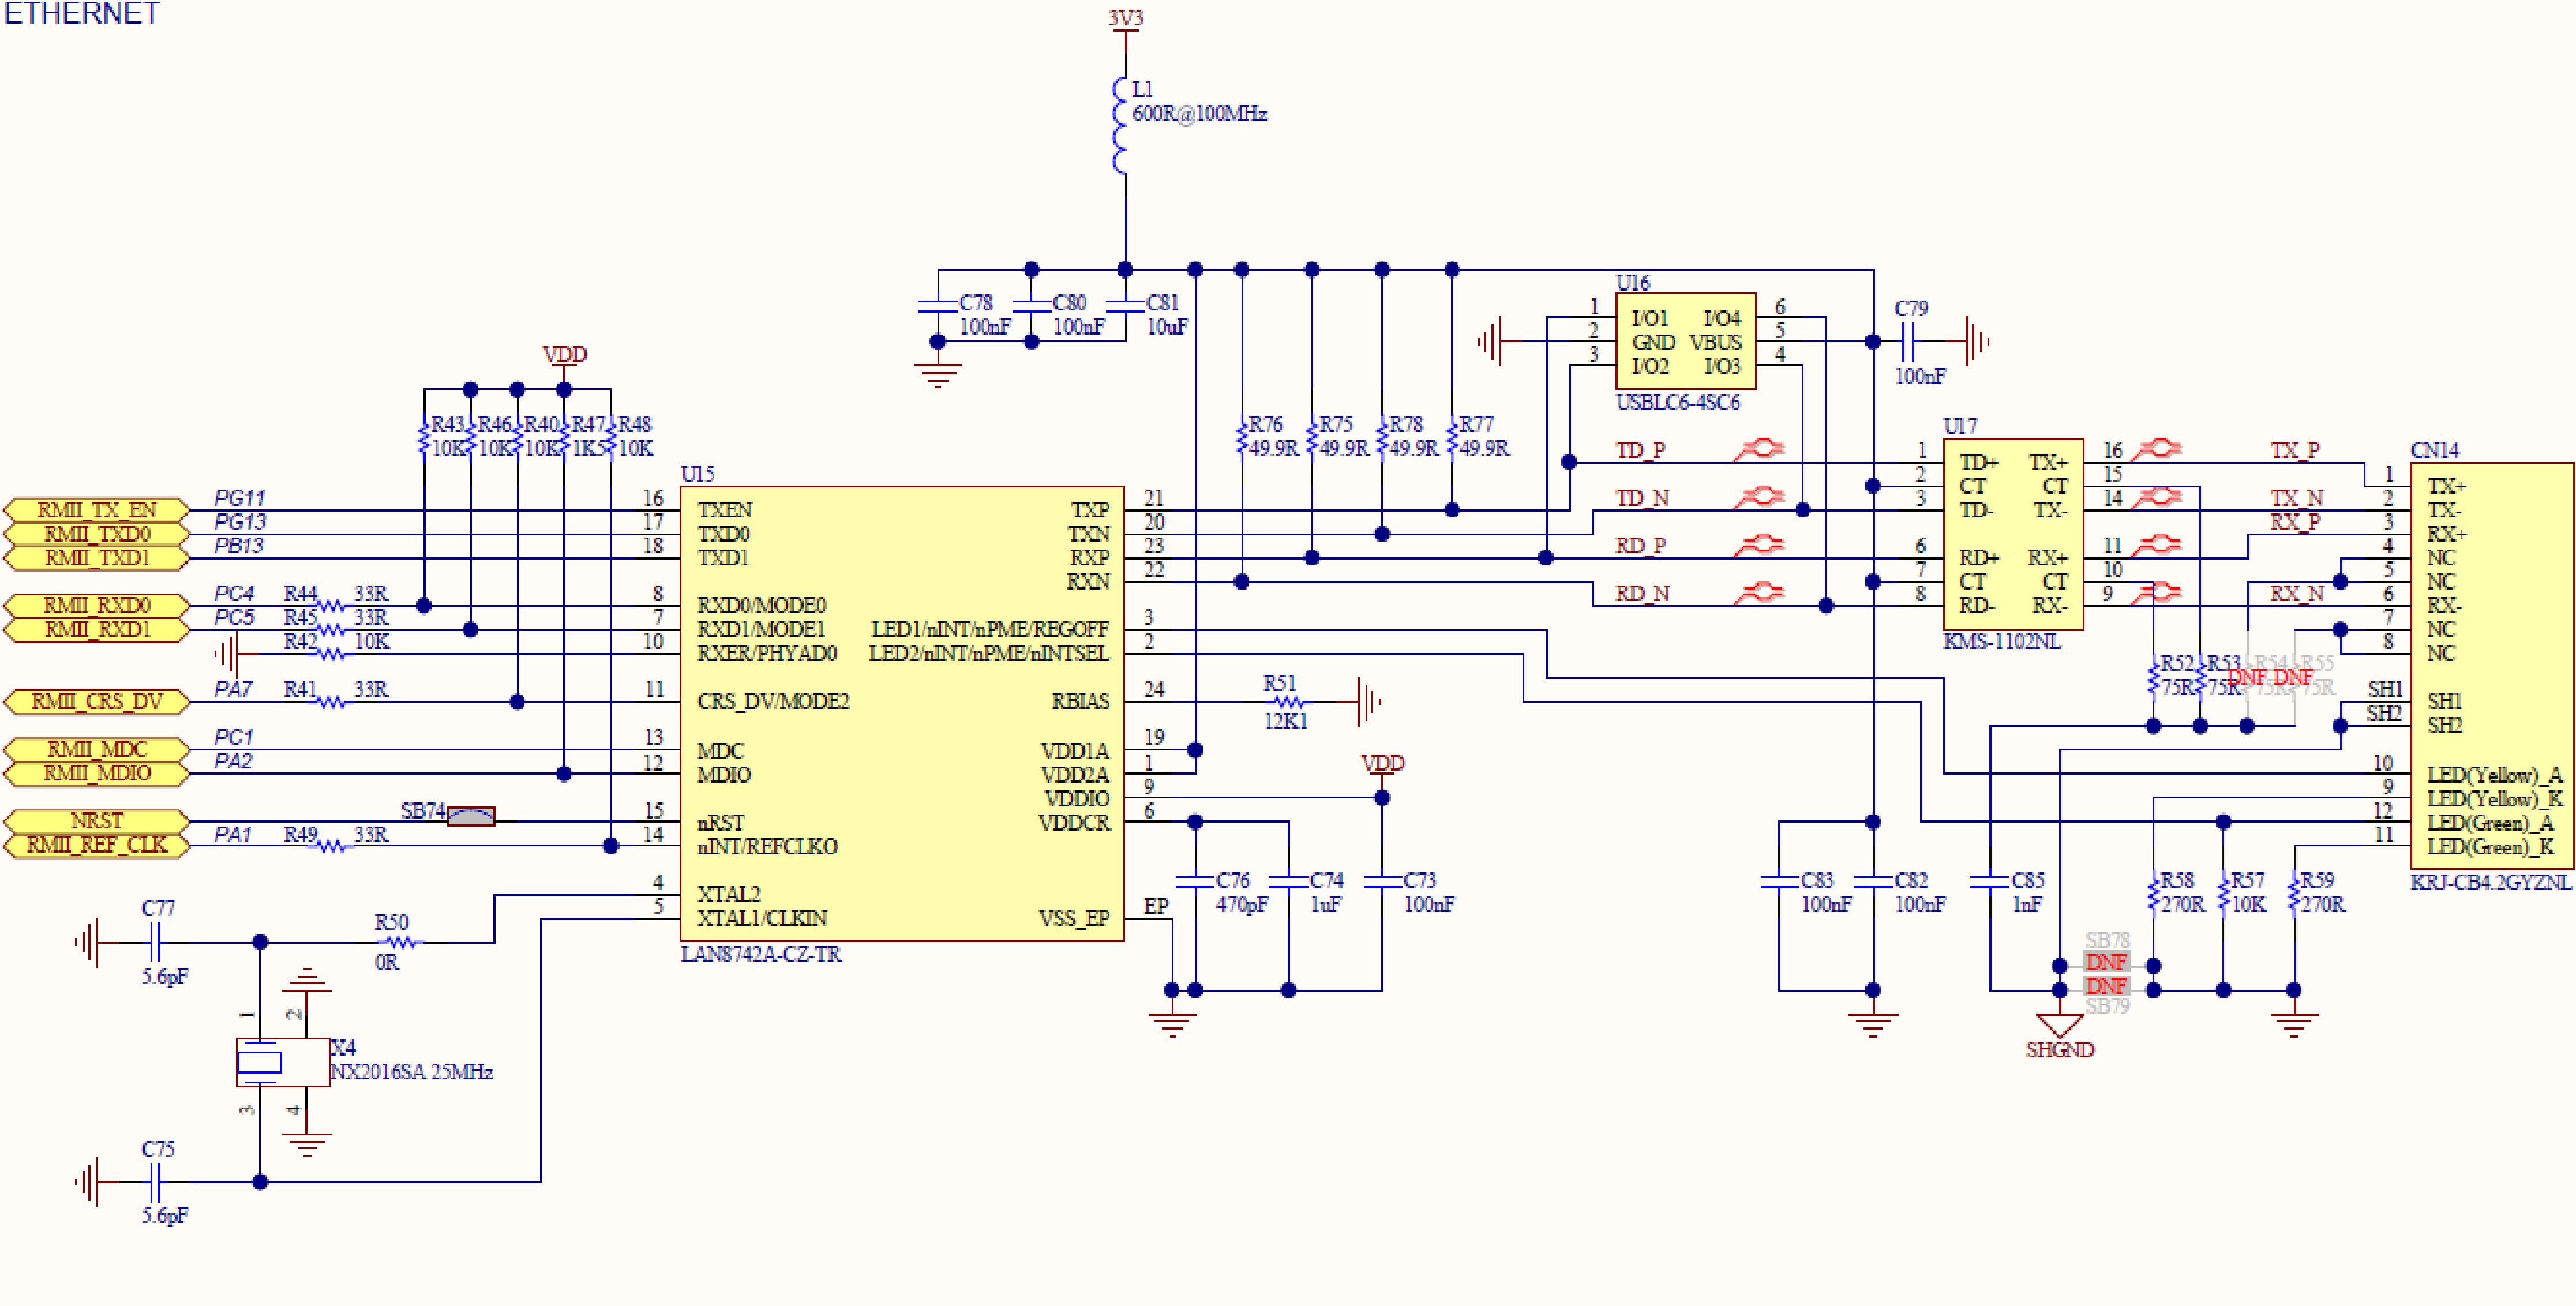

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.8-2.8V
Yellow	585nm	20mA	1.8-2.8V

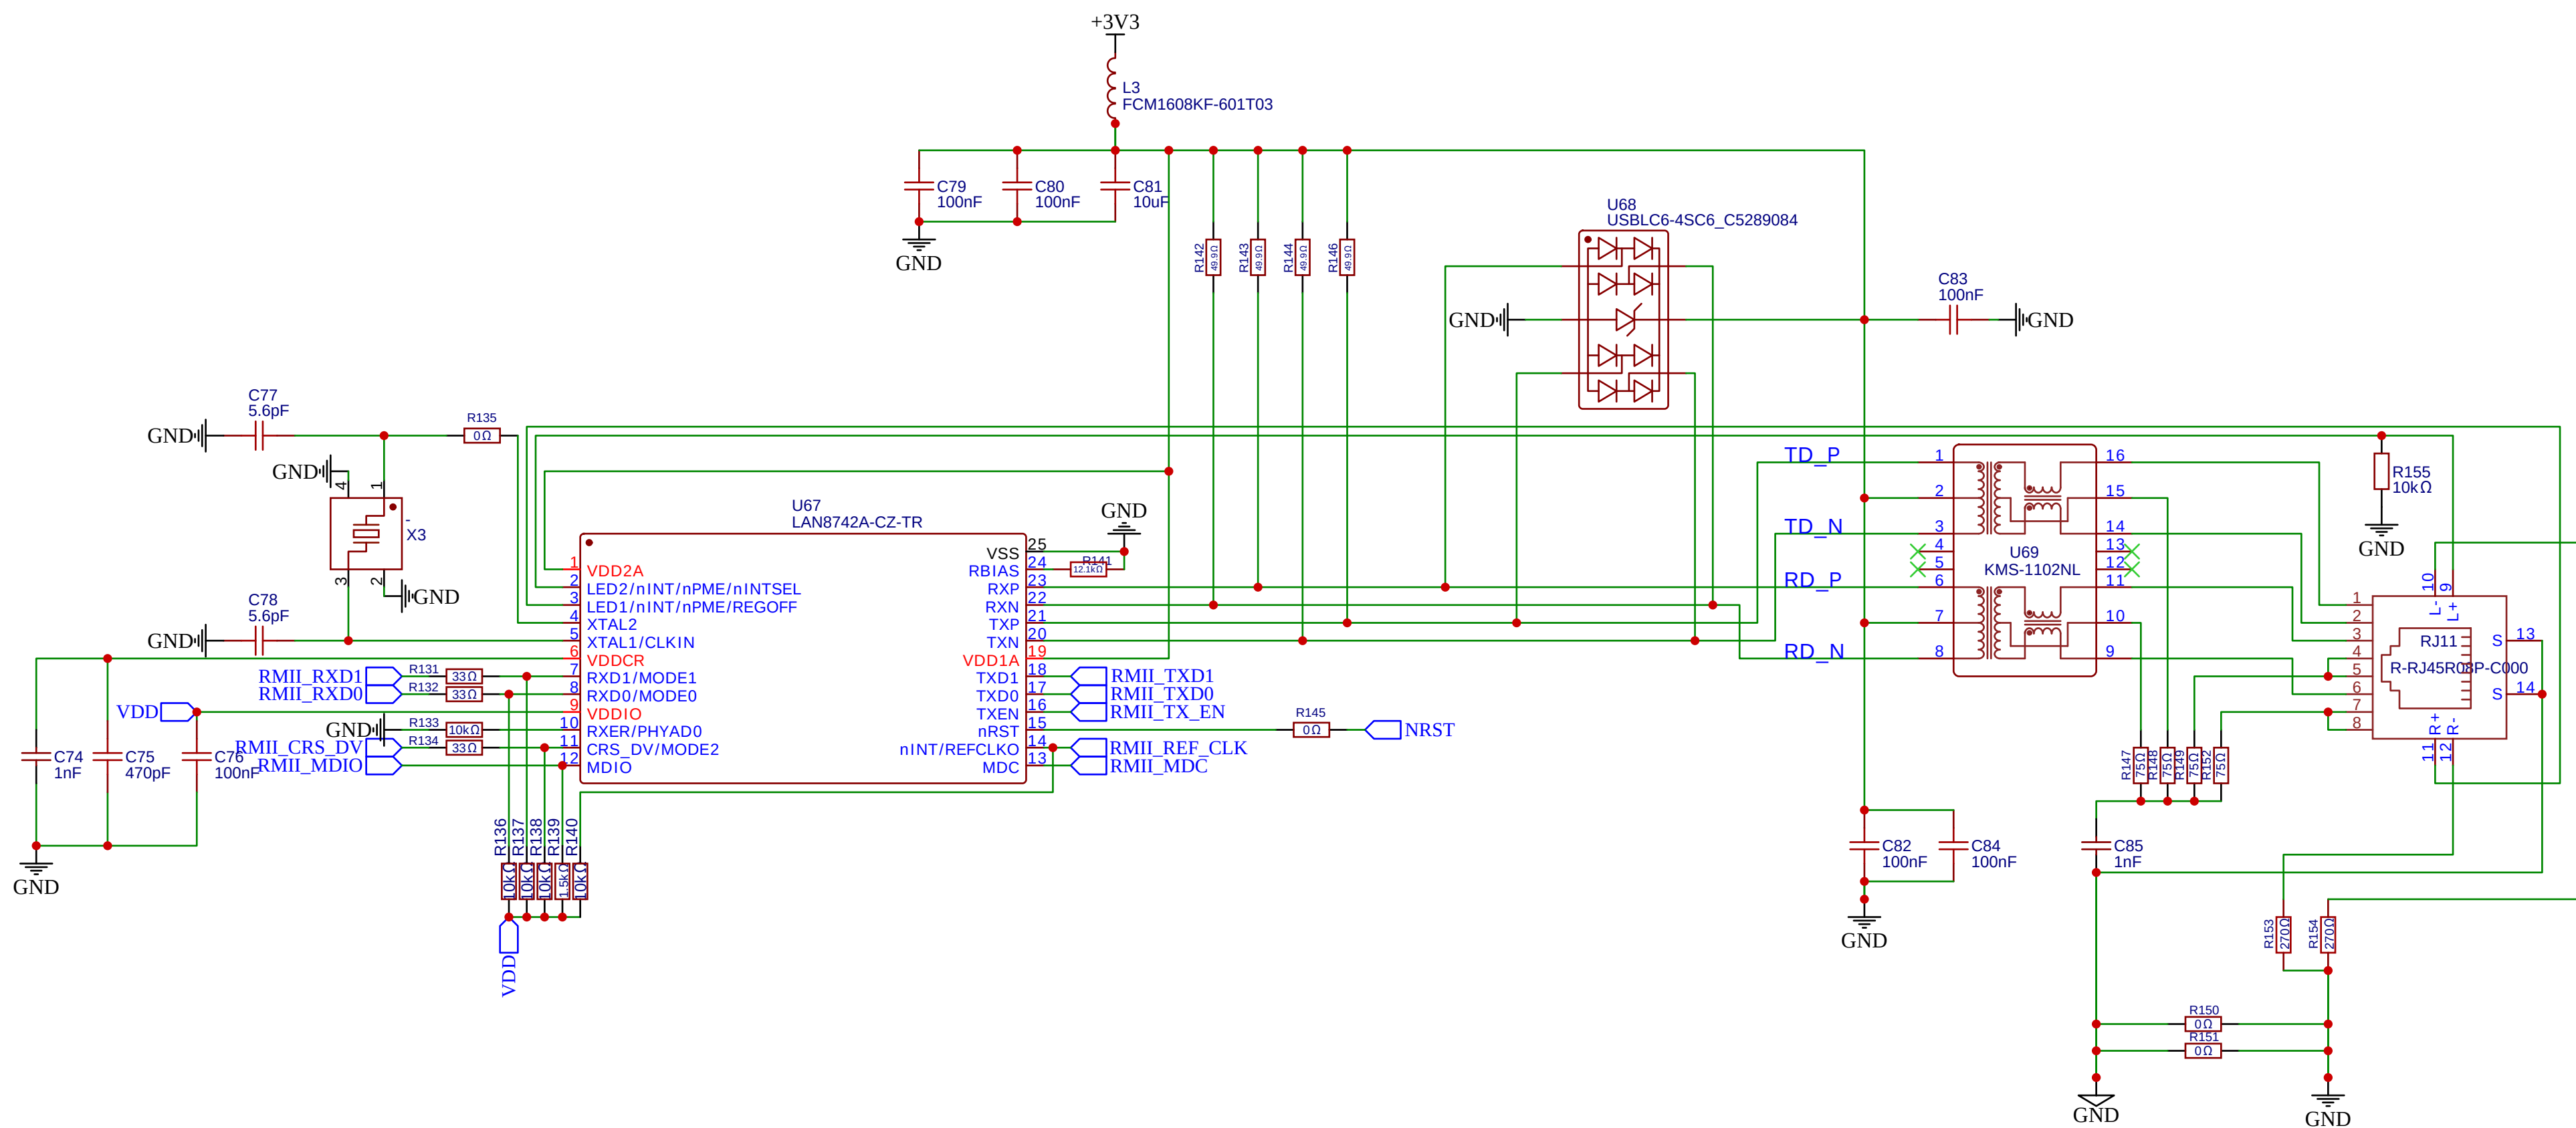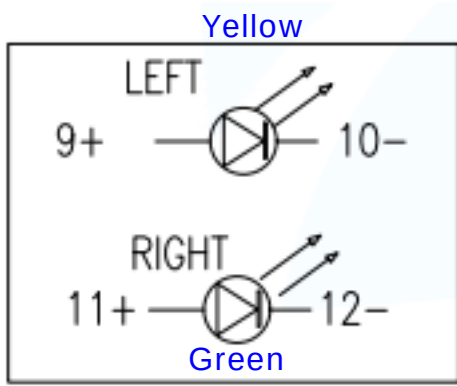

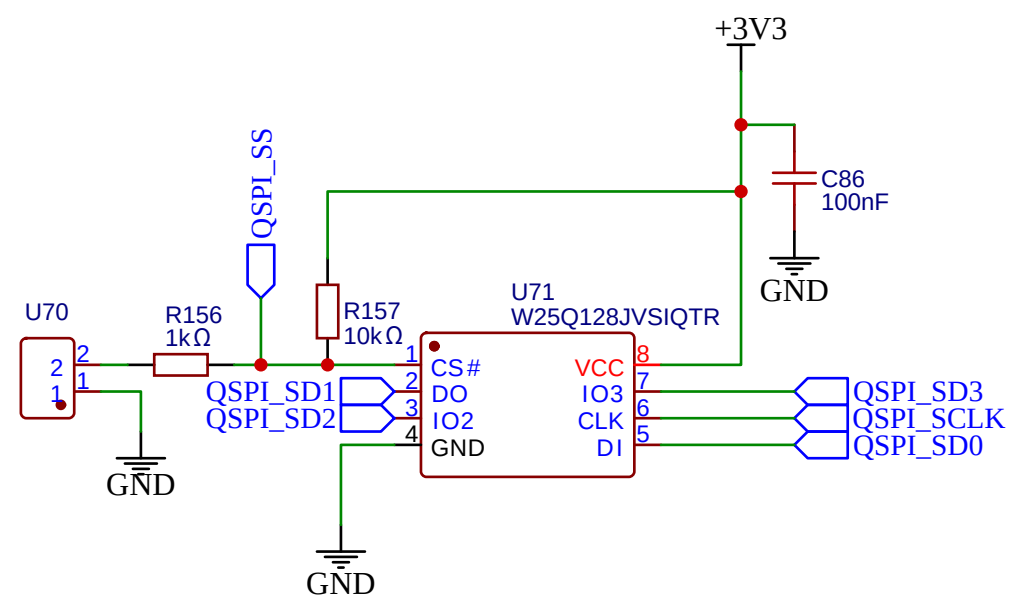

TITLE: Flash		REV: 1.0
EasyEDA	Company: Your Company	Sheet: 1/1
	Date: 2025-03-11 Drawn By: morfey74	