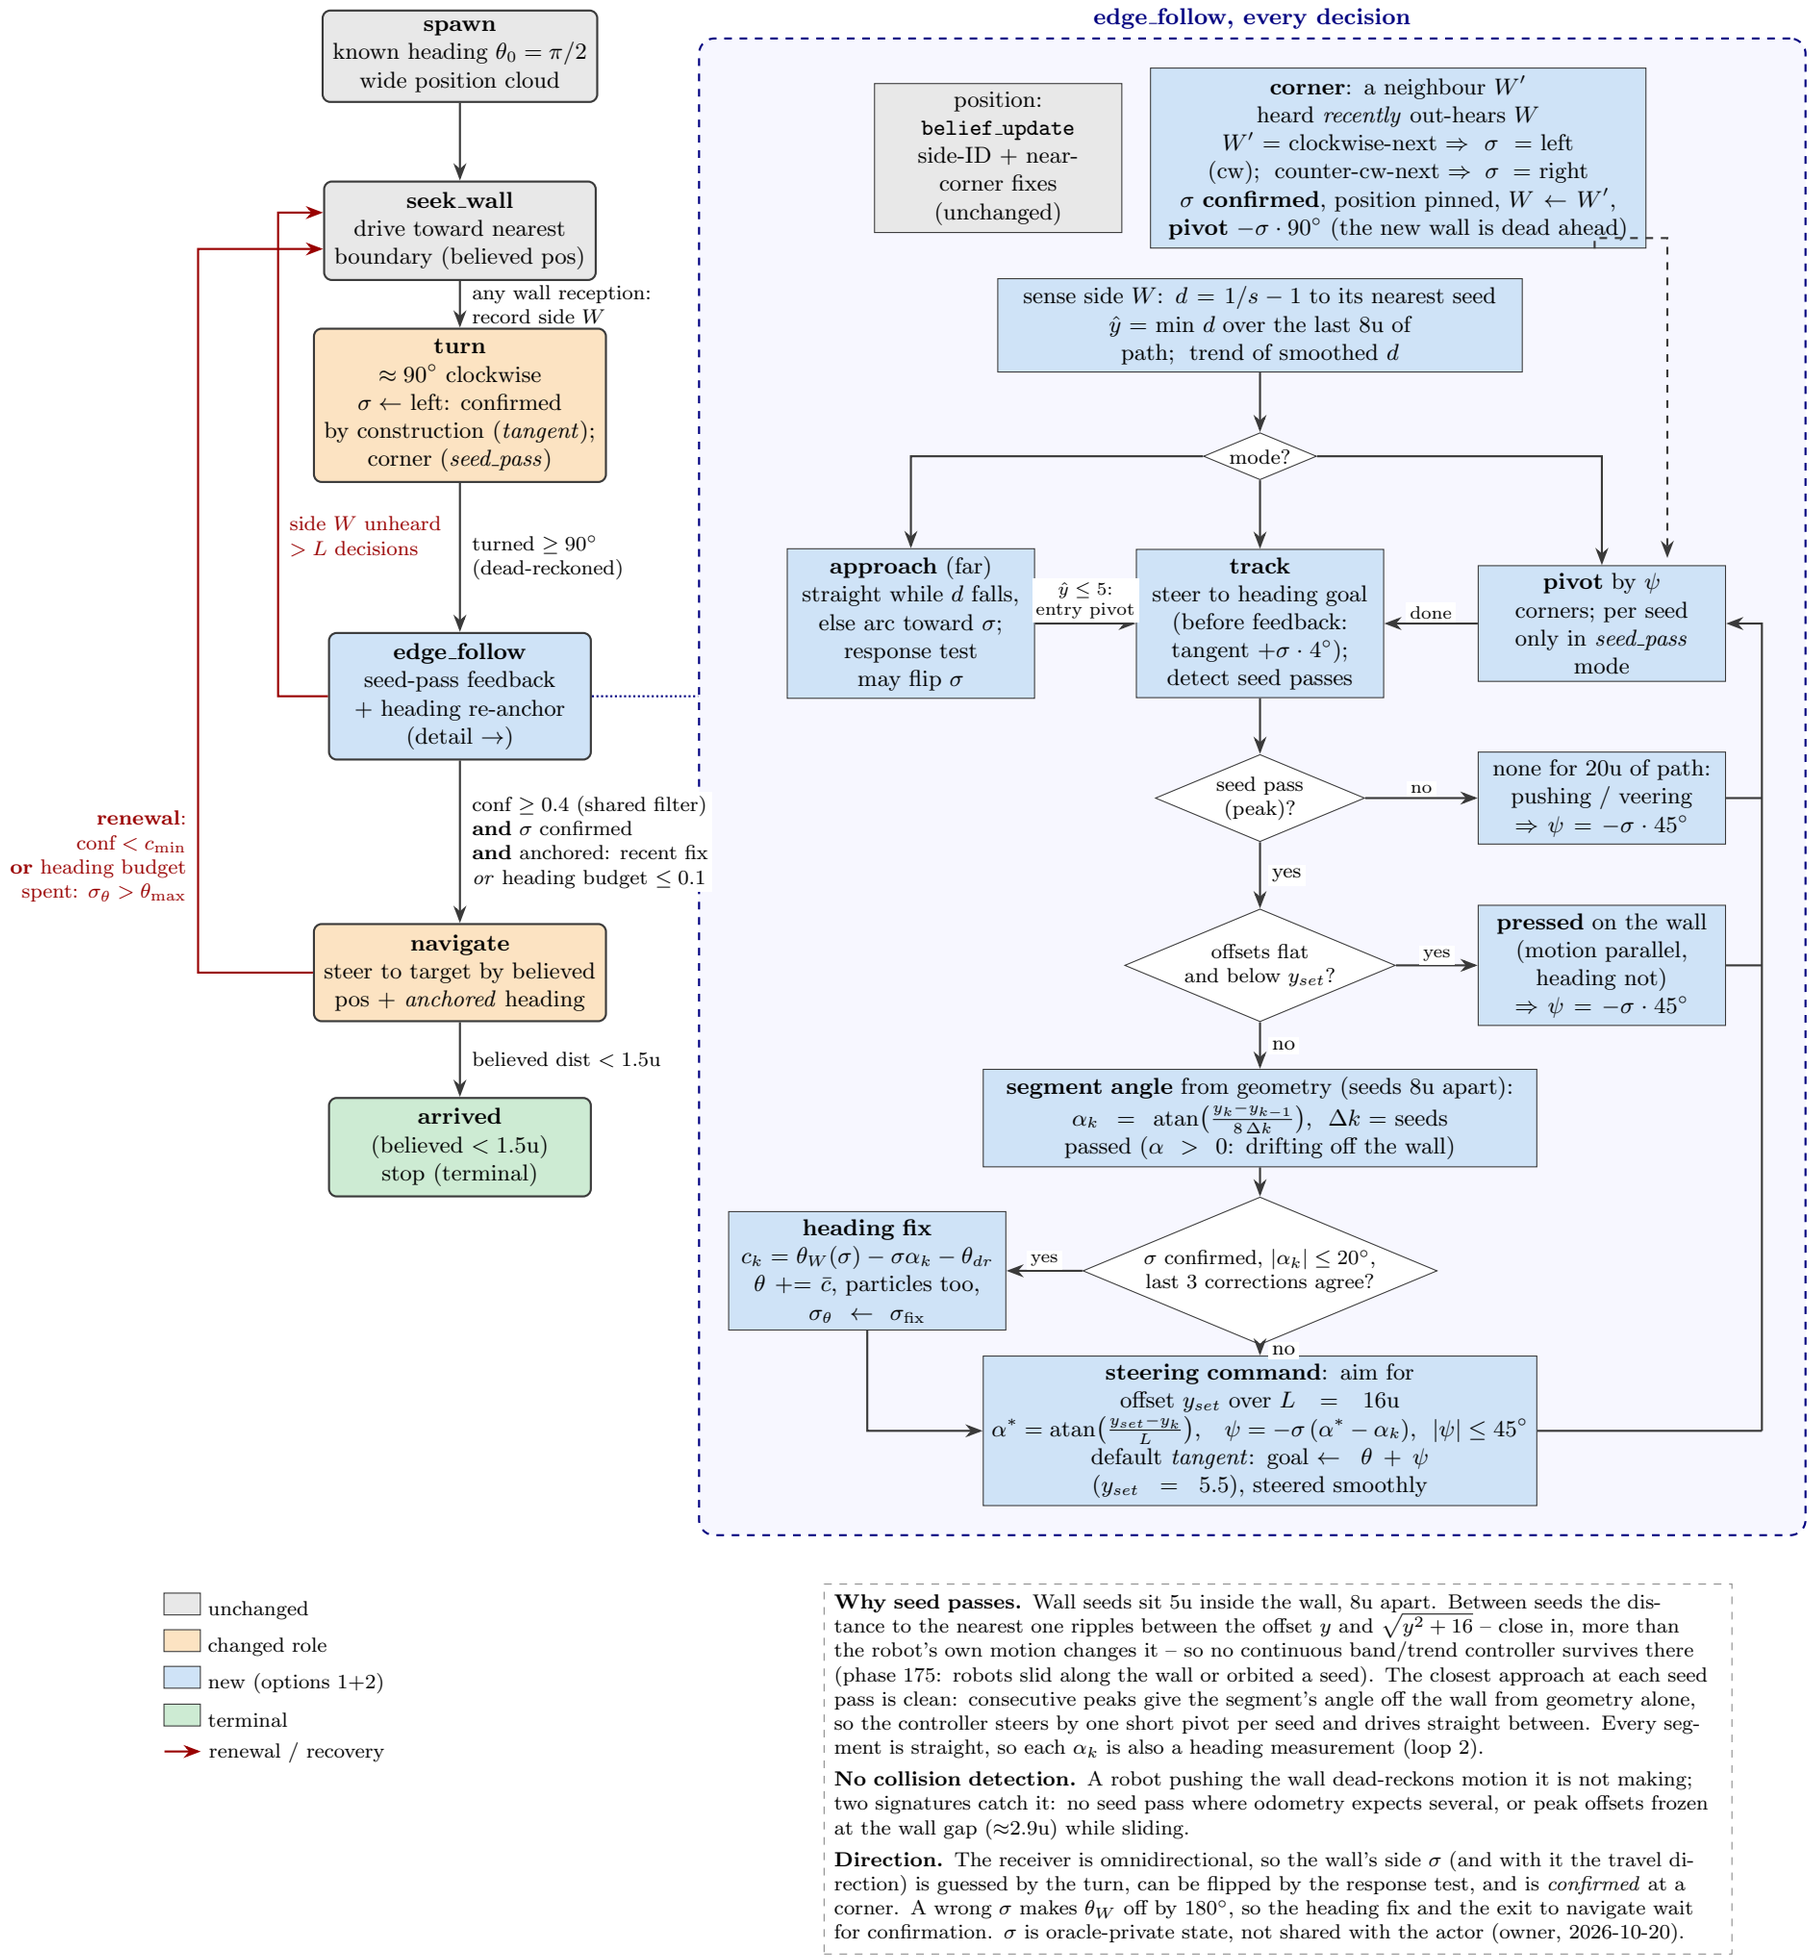


Why seed passes. Wall seeds sit 5u inside the wall, 8u apart. Between seeds the distance to the nearest one ripples between the offset y and $\sqrt{y^2 + 16}$ – close in, more than the robot's own motion changes it – so no continuous band/trend controller survives there (phase 175: robots slid along the wall or orbited a seed). The closest approach at each seed pass is clean: consecutive peaks give the segment's angle off the wall from geometry alone, so the controller steers by one short pivot per seed and drives straight between. Every segment is straight, so each α_k is also a heading measurement (loop 2).

No collision detection. A robot pushing the wall dead-reckons motion it is not making; two signatures catch it: no seed pass where odometry expects several, or peak offsets frozen at the wall gap (≈2.9u) while sliding.

Direction. The receiver is omnidirectional, so the wall's side σ (and with it the travel direction) is guessed by the turn, can be flipped by the response test, and is *confirmed* at a corner. A wrong σ makes θ_W off by 180°, so the heading fix and the exit to navigate wait for confirmation. σ is oracle-private state, not shared with the actor (owner, 2026-10-20).