

SUPALITE ROOF QUOTE / ORDER FORM

☐ QUOTE

☐ ORDER

☐ AMENDMENT

PREVIOUS SLQ:

CUSTOMER DETAILS

CUSTOMER











DATE

REFERENCE

CONTACT NUMBER

EMAIL

ROOF STYLES

LEAN-TO			DOUBLE HIPPED			VICTORIAN / EDWARDIAN			GABLE	SPECIAL
										See drawing
<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

RIDGE SUPPORT PREFERENCE (if required)

☐ TIE BAR

☐ RIDGE SUPPORT BEAM


☐ TIMBER TRUSS

ROOF SPECIFICATION

Standard Roof Specification

This roof specification meets Building Regulations for England for new build or roof replacements. As the Internal Insulated Plasterboard has increased by 10mm to 72mm please note a packer may be required to the top of the window frame.

(FRAME PACKER NOT SUPPLIED BY SUPALITE)

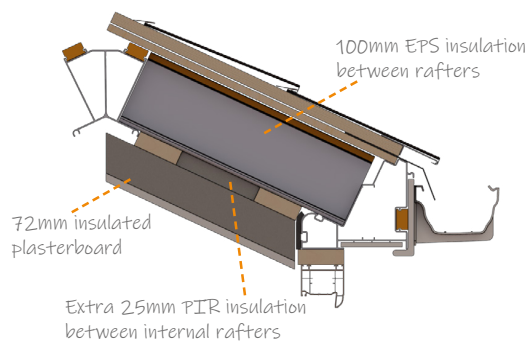

Achieving a
0.15
U-VALUE
as standard

☐ SELECT

OPTIONAL ROOF SPECIFICATIONS

0.15 U-Value Ventilated

This extra ventilated roof specification has been developed typically for areas of the UK that are required to meet U-Value ventilation requirements. Please note roofs will be fabricated with deeper rafter battens and eaves vents for increased air flow. **(FRAME PACKER NOT SUPPLIED BY SUPALITE)**

☐ SELECT

0.12 U-Value

This roof specification requires 120mm PIR insulation for in between the rafters. An additional 25mm of PIR insulation is included, this is fabricated to be installed either above or below the aluminium frame. Please call us to discuss these options further. 82mm insulated boards are supplied, a timber packer may be required to the top of the window frame. **(FRAME PACKER NOT SUPPLIED BY SUPALITE)**

☐ SELECT

INSULATION UPGRADE (optional but not required to meet 0.15 U-Value)

Upgrade to 100mm PIR Insulation in between rafters.
Please note this will be an extra cost

☐ YES

☐ NO

TILE OPTIONS

EXTRALIGHT SHINGLE
Pitch 10° to 35°

☐ CHARCOAL

☐ EMBER

☐ WALNUT

EXTRALIGHT CLASSIC:
Pitch 12.5° to 35°

☐ BLACK

TAPCO SLATE:
Pitch 12° to 35°

☐ PEWTER GREY

☐ PLUM

☐ BRICK RED

☐ CHESTNUT BROWN

☐ STONE BLACK

FASCIA & SOFFIT COLOUR

☐ WHITE

☐ ROSEWOOD

☐ GOLDEN OAK

☐ ANTHRACITE GREY

☐ BLACK

GUTTER COLOUR

☐ WHITE

☐ DARK BROWN

☐ ANTHRACITE GREY

☐ BLACK

ROOF EXTRAS (please show on drawing below)

ROOF WINDOWS (Manual with pole)
Pitch 15° to 35°

☐ 550mm x 780mm

☐ 550mm x 980mm

☐ 780mm x 980mm

INTERNAL ROOF WINDOW COLOUR

☐ PINE

☐ WHITE

QTY:

SkyVista
by Shurel GLASS PANEL
Pitch 10° to 25°

☐ ACTIV BLUE

☐ NEUTRAL
(non-stock on special order)

☐ UPGRADE TO GLOW

QTY:

LIGHTING KITS (Sets of 4)

INTERNAL

☐ WHITE

☐ CHROME

QTY:

EXTERNAL

☐ CHROME

QTY:

MEASUREMENTS

WIDTH: mm

PROJECTION: mm

ROOF PITCH:

PLEASE SKETCH ANY BOX GUTTERS, SOIL PIPES OR OTHER RELEVANT DETAILS. UNSUPPORTED SPAN OF EAVES BEAM 2400MM. GALLOWS BRACKETS WILL BE REQUIRED ON ALL BOX GUTTERS OVER 3200mm.
ALL SIZES QUOTED ARE FOR INTERNAL FRAME SIZES.

NOTES