


# INTUMESCENT PAINT & FIRE RETARDANT PAINT

---



## Structural Steel Surface

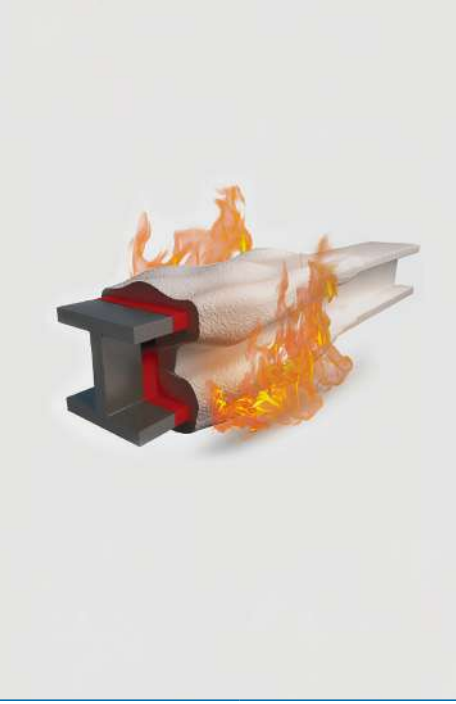

## اسطح الهياكل المعدنية

### اسطح الهياكل المعدنية المحمية

دهانات نوبل الانتوميسنت لحماية  
الحريق مصممة خصيصاً لتأخير او  
منع انتشار لهب الحريق حتى 120  
دقيقة على الفولاذ.

### Protected Steel Surface

Noble Paints Fire Protection  
Coating act as a Passive Fire  
Resistance on Steel up to 120  
Minutes.

## Concrete Surface



## الاسطح الخرسانية

### اسطح الخرسانية المحمية

يحافظ نوبل الانتوميسنت ديلو  
على معايير العزل الحراري وسلامة  
الهياكل الخرسانية لمدة ٢٤٠  
دقيقة (٤ ساعات).

### Protected Concrete Surface

Noble Intumescent Paint (W)  
coating increases thermal  
insulation and integrity of  
concrete structure for a period  
of 240 minutes (4 hours).

## Wooden Surface



## الاسطح و الالواح الخشبية

### الاسطح والالواح الخشبية المحمية

يعمل نوبل فاير ريتاردنت فارنيش على تقليل انبعاث الدخان ( S1 ) عدم تكون قطرات ( جزيئات ) ملتهبة ( d0 ).

### Protected Wooden Surface

Wood and timber derivatives when protected with Noble fire Retardant Varnish coating, minimizes the emission of smoke ( S1 ) and generation of flaming droplets ( d0 ).

## RANGE OF PRODUCTS

## مجموعة من المنتجات



**Noble Intumescent Paint  
( Structural Steel Surface )**



**Noble Intumescent Paint (W)  
( Concrete Surface )**



**Noble Fire Retardant Varnish  
(Wooden & Timber Surface)**



**Noble Paints Company LTD.**

📍 Kingdom of Saudi Arabia - Riyadh 14311 - P.O.Box : 8327

✉ info@noblepaints.com.sa

📱 NoblePaints 🌐 www.noblepaints.com.sa