


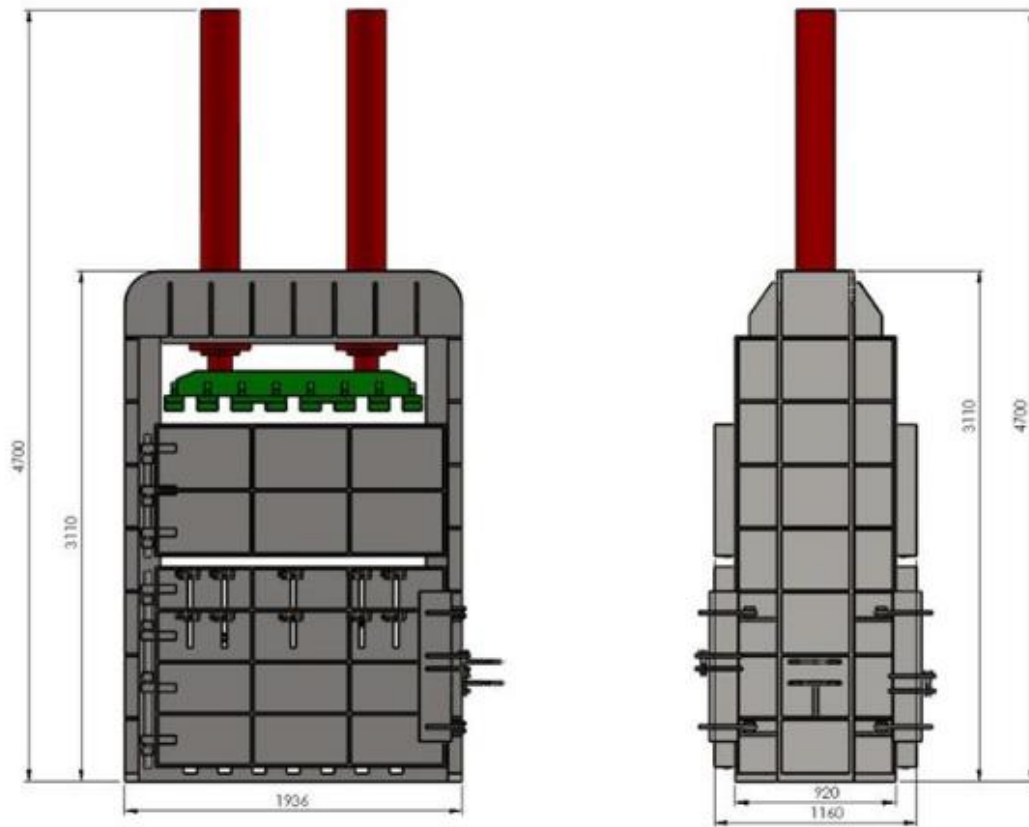

Our BLT-150 is engineered to efficiently compress and package used/waste tyres for storage, transportation and recycling process. Our BLT-150 comes with a robust hydraulic system and a sturdy compression chamber which can compact a large number of tyres into dense and uniform bales quickly and efficiently. Our BLT-150 is equipped with user friendly controls and safety features, such as emergency stop functions and safety guards, operators can easily and safely operate the BLT-150 to achieve optimal compression results. Our BLT-150 is ideal for businesses and organizations seeking to improve their tyre recycling operations by reducing storage space, lowering transportation costs and enhancing overall efficiency.

PRODUCT DETAILS :

- * The machine is special design for the tires.
- * Hydraulic door opening, double cylinder, has manual valve and electric valve operation.
- * Suitable for compressing automobile tires, waste rubber, etc, rubber raw material products.
- * Adopt England brand sealing parts, improve the life time of oil cylinder.

- * Adopt brand superposition type valve group.
- * Adopt connect motor with pump directly, to ensure 100% concentricity, and extend use life of pump.
- * BLT 150 is integrated type machine, open door by manual.

BLT 150 – Tyre Baler Machine Specifications

General Information

Specification	Details
Model	BLT 150
Application	Designed for compressing and packaging used/waste tyres for storage, transport, and recycling
Structure	MS (Mild Steel) heavy-duty frame
Operation Type	Hydraulic door opening (manual & electric operation)
Machine Type	Integrated vertical baler (manual door opening)
Baler Weight	9000 kg
Machine Weight	7000 kg
Capacity	4–5 bales/hour
Overall Height	4700 mm

Compression & Hydraulic System

Specification	Details
Compaction Force	150 Ton

No. of Cylinders	2 (Compaction) + 2 (Door Locking)
Cylinder Size	2000 mm (H)
Compaction Type	Vertical hydraulic compression
Pump Type	Piston Pump
Hydraulic Oil Drive	Dual vane pump with high LPM (high flow rate)
Oil Tank Capacity	600 Litres
Hydraulic Components	England brand sealing parts; brand superposition-type valve group
Motor–Pump Connection	Direct coupling for perfect concentricity and extended life

Chamber & Bale Details

Specification	Details
Chamber Size (L × W × H)	1800 × 1000 × 2100 mm
Bale Size (L × W × H)	1800 × 1000 × (700–1250) mm
Bale Weight	800 – 1200 kg
Feed Opening Size (L × H)	1800 × 750 mm
No. of Ties	5 Nos
No. of Doors	4 total (2 Front + 2 Rear)

Electrical & Power System

Specification	Details
Electric Motor	20 HP + 2 HP
Total Power	22 kW / 30 HP
Voltage (Customizable)	380V / 50Hz

Power Supply	240W AC
Drive Type	Dual motor setup
Motor Connection	Direct drive to pump for maximum efficiency

Safety & Control Features

Specification	Details
Tower Light	Auto red light during baling process (safety indication)
Limit Switch	Ensures structural & hydraulic safety; reduces cycle time
Safety Guards	Provided around moving parts
Emergency Stop	Equipped for operator safety
Control Type	Manual & Electric valve operation

Performance & Application

Specification	Details
Suitable Materials	Automobile tyres, waste rubber, rubber raw materials
Output	Dense, uniform tyre bales
Productivity	4–5 bales per hour
Benefits	Reduces storage space, lowers transportation costs, improves recycling efficiency
Ideal For	Tyre recycling plants, rubber waste management units, and industrial recycling centers