SPEC® CINT2006 Result

Microsoft Corporation

(Test Sponsor: Kenji Mouri)

Azure Standard D64as v7

SPECint®2006 =	83.0
SPECint_base2006 =	73.2

CPU2006 license:	3939	**Test date:**	Feb-2026
Test sponsor:	Kenji Mouri	**Hardware Availability:**	Feb-2026
Tested by:	Misaki	**Software Availability:**	Jan-2026

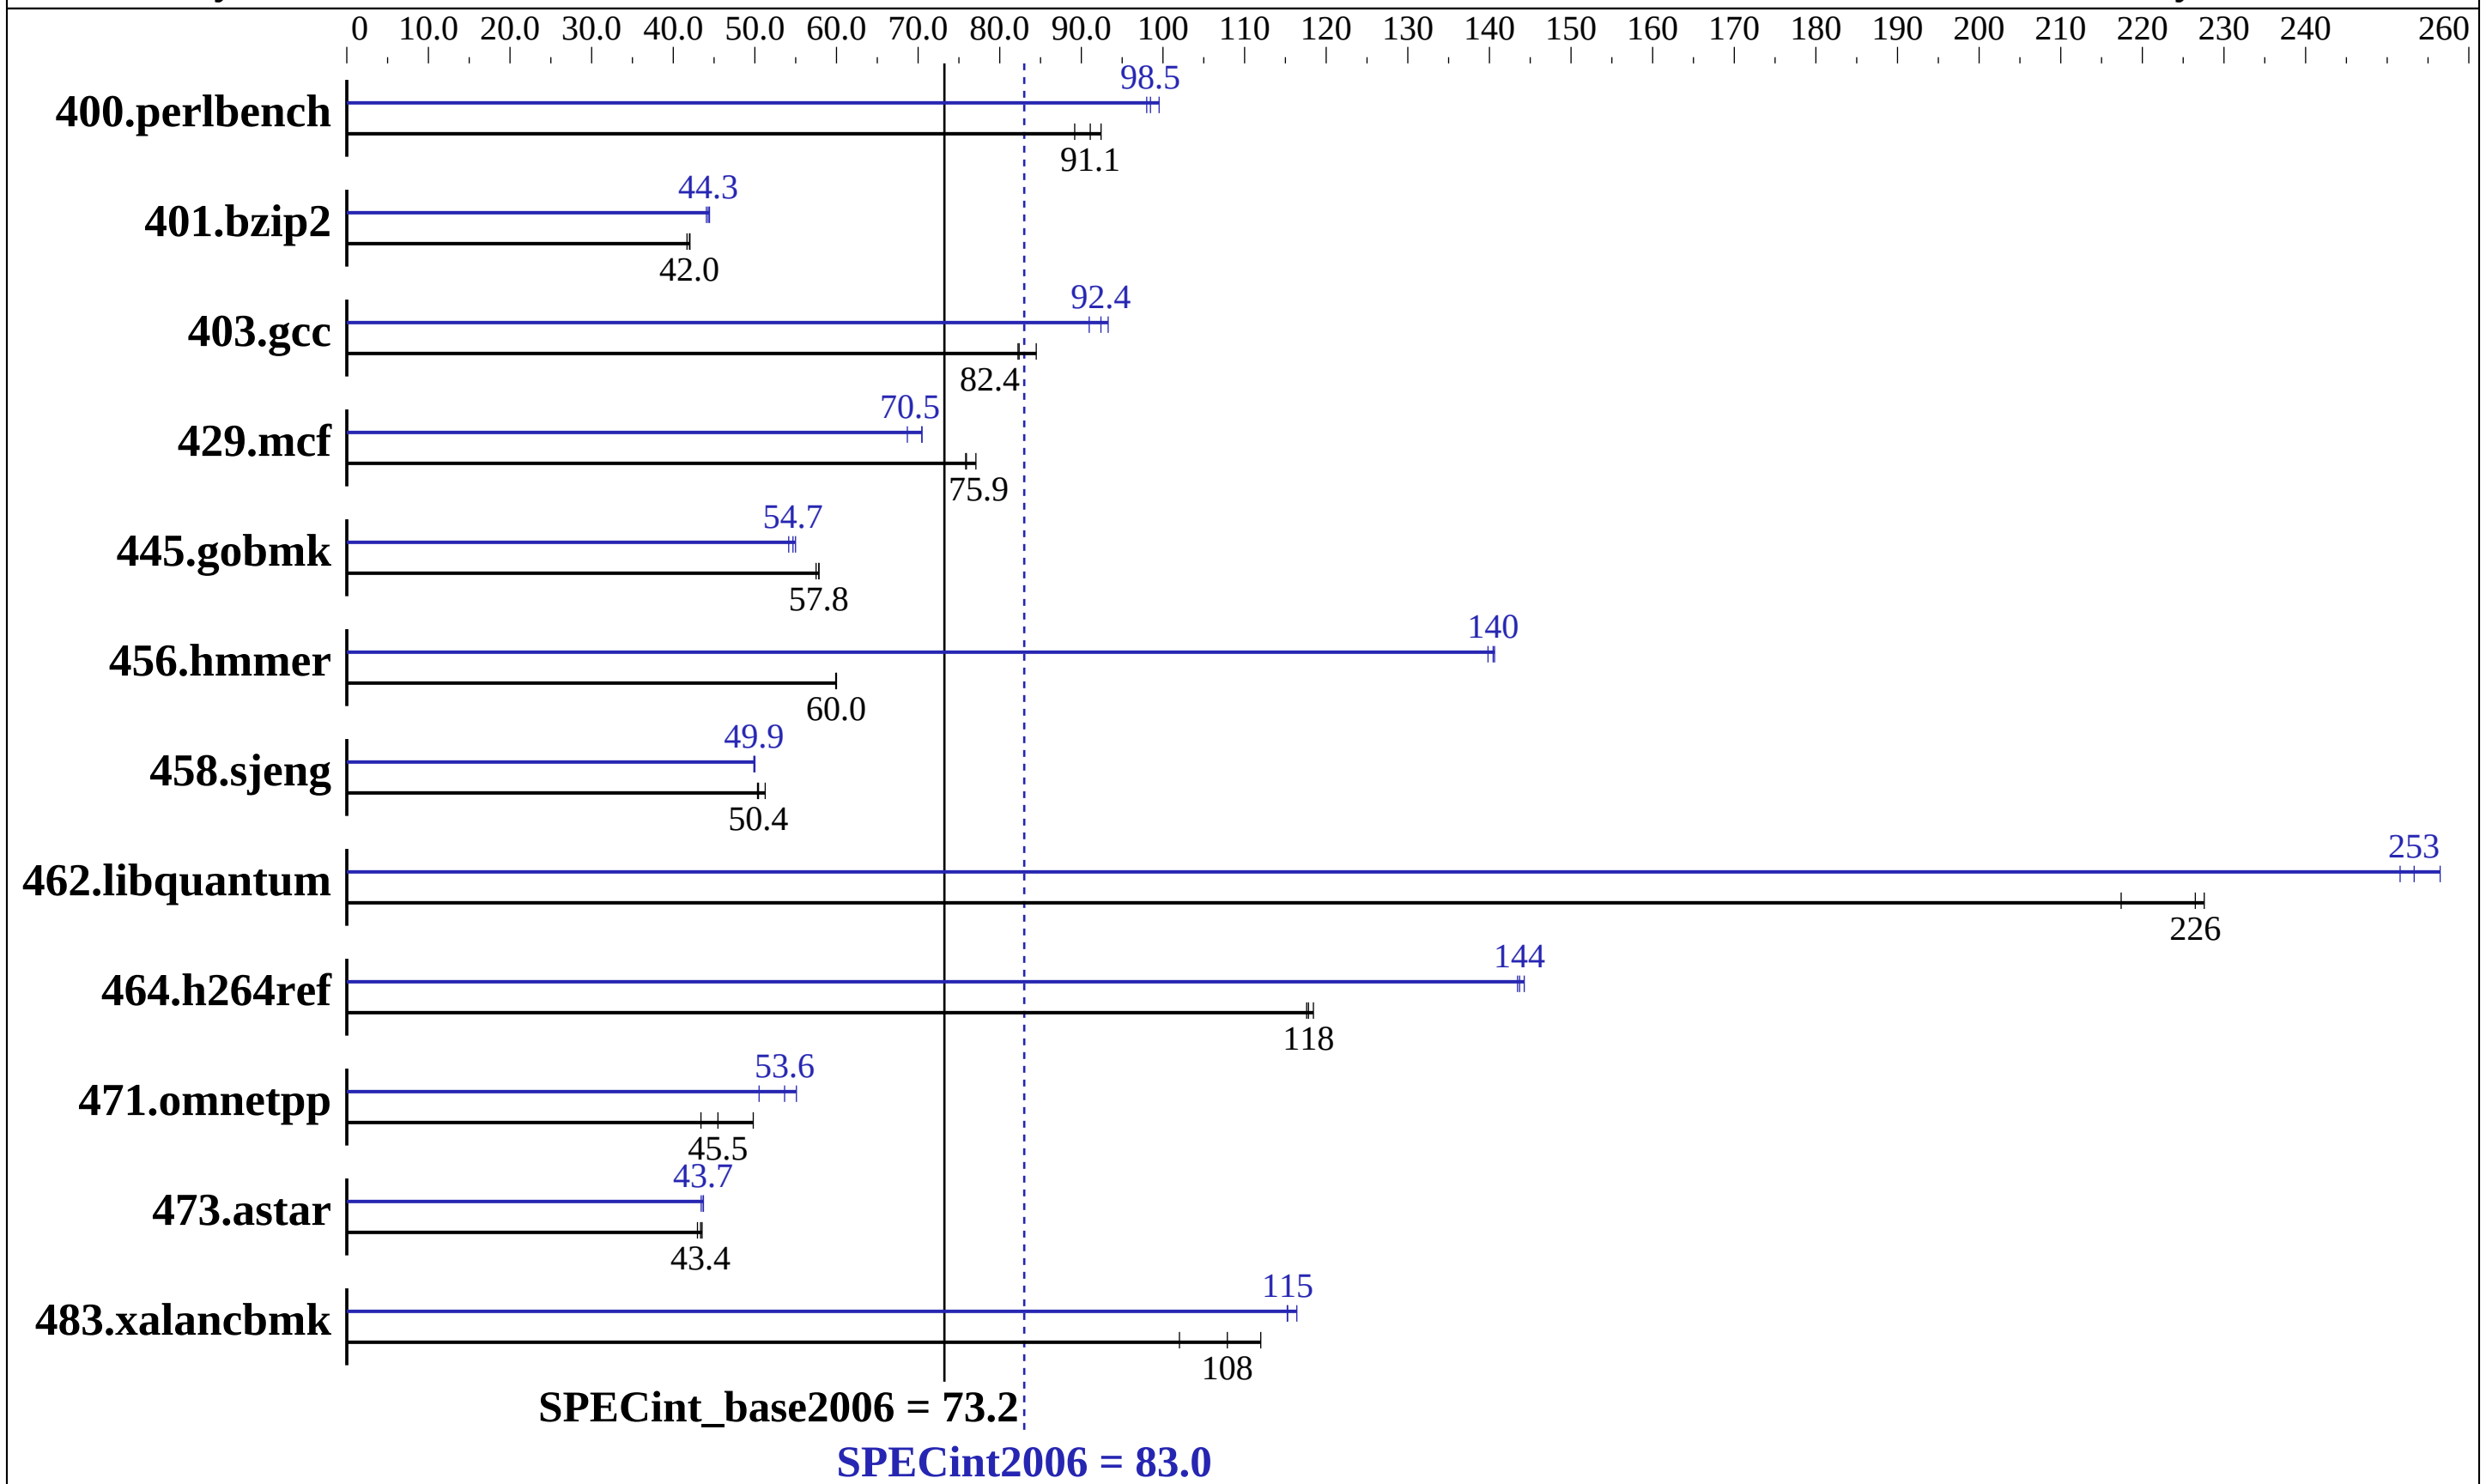

Hardware

CPU Name:	AMD EPYC 9V45 96-Core
CPU Characteristics:	AMD EPYC 9V45 96-Core @ 4.6GHz
CPU MHz:	4600
FPU:	Integrated
CPU(s) enabled:	32 cores, 1 chip, 32 cores/chip, 2 threads/core
CPU(s) orderable:	1 chips
Primary Cache:	1 MB I + 1.5 MB D on chip per core
Secondary Cache:	32 MB I+D on chip per core
L3 Cache:	512 MB
Other Cache:	None
Memory:	256 GB
Disk Subsystem:	256 GB Premium SSD
Other Hardware:	None

Software

Operating System:	Debian GNU/Linux 12 (bookworm) 6.1.0-43-cloud-amd64
Compiler:	C/C++/Fortran: Version 12.2.0 of GCC, the GNU Compiler Collection
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other Software:	None

SPEC CINT2006 Result

Microsoft Corporation
(Test Sponsor: Kenji Mouri)

Azure Standard D64as v7

SPECint2006 = 83.0

SPECint_base2006 = 73.2

CPU2006 license:	3939	**Test date:**	Feb-2026
Test sponsor:	Kenji Mouri	**Hardware Availability:**	Feb-2026
Tested by:	Misaki	**Software Availability:**	Jan-2026

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	106	92.4	110	89.2	**107**	**91.1**	99.7	98.0	**99.2**	**98.5**	98.2	99.5
401.bzip2	230	42.0	231	41.7	**230**	**42.0**	217	44.4	219	44.1	**218**	**44.3**
403.gcc	95.3	84.5	97.9	82.2	**97.7**	**82.4**	**87.1**	**92.4**	86.3	93.3	88.5	91.0
429.mcf	**120**	**75.9**	118	77.1	120	75.8	129	70.5	**129**	**70.5**	133	68.7
445.gobmk	182	57.5	**181**	**57.8**	181	57.8	**192**	**54.7**	191	55.0	194	54.1
456.hmmer	156	60.0	**156**	**60.0**	156	59.9	66.3	141	66.7	140	**66.4**	**140**
458.sjeng	240	50.3	**240**	**50.4**	236	51.3	**242**	**49.9**	242	49.9	242	50.0
462.libquantum	95.3	217	91.0	228	**91.5**	**226**	**81.8**	**253**	80.8	256	82.4	252
464.h264ref	**188**	**118**	188	118	187	118	153	144	154	143	**154**	**144**
471.omnetpp	**137**	**45.5**	126	49.8	144	43.4	124	50.5	**117**	**53.6**	113	55.1
473.astar	161	43.5	163	43.0	**162**	**43.4**	161	43.7	162	43.4	**161**	**43.7**
483.xalancbmk	61.6	112	**64.0**	**108**	67.6	102	59.9	115	**59.9**	**115**	59.3	116

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

```
Sysinfo program /home/misaki/Library/cpu2006/Docs/sysinfo.new
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on HimiMisakiBenchmarkAMD64 Wed Feb 18 00:51:45 2026

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : AMD EPYC 9V45 96-Core Processor
      1 "physical id"s (chips)
      64 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 32
      siblings  : 64
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21
      22 23 24 25 26 27 28 29 30 31
   cache size : 1024 KB

From /proc/meminfo
   MemTotal:       263921476 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Debian GNU/Linux 12 (bookworm)
```

Continued on next page

Platform Notes (Continued)

```
From /etc/*release* /etc/*version*
   cloud-release:
      ID=azure
      VERSION="20260210-2384"
   debian_version: 12.13
   os-release:
      PRETTY_NAME="Debian GNU/Linux 12 (bookworm)"
      NAME="Debian GNU/Linux"
      VERSION_ID="12"
      VERSION="12 (bookworm)"
      VERSION_CODENAME=bookworm
      ID=debian
      HOME_URL="https://www.debian.org/"
      SUPPORT_URL="https://www.debian.org/support"

uname -a:
   Linux HimiMisakiBenchmarkAMD64 6.1.0-43-cloud-amd64 #1 SMP PREEMPT_DYNAMIC
   Debian 6.1.162-1 (2026-02-08) x86_64 GNU/Linux

run-level 5 Feb 17 04:26

SPEC is set to: /home/misaki/Library/cpu2006
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/nvme0n1p1 ext4  252G  8.2G  233G   4% /

(End of data from sysinfo program)
```

Base Compiler Invocation

C benchmarks:
`gcc`

C++ benchmarks:
`g++`

Base Portability Flags

400.perlbench:	-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2:	-DSPEC_CPU_LP64
403.gcc:	-DSPEC_CPU_LP64
429.mcf:	-DSPEC_CPU_LP64
445.gobmk:	-DSPEC_CPU_LP64
456.hmmer:	-DSPEC_CPU_LP64
458.sjeng:	-DSPEC_CPU_LP64
462.libquantum:	-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref:	-DSPEC_CPU_LP64 -fsigned-char

Continued on next page

Base Portability Flags (Continued)

471.omnetpp: `-DSPEC_CPU_LP64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-std=gnu89 -m64 -march=native -mprefer-vector-width=512 -O2 -flto -fno-strict-aliasing`

C++ benchmarks:
`-std=c++03 -m64 -march=native -mprefer-vector-width=512 -O2 -flto -fno-strict-aliasing`

Peak Compiler Invocation

C benchmarks:
`gcc`

C++ benchmarks:
`g++`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:
`-std=gnu89 -m64 -fprofile-generate`(pass 1) `-fprofile-use`(pass 2) `-march=native -mprefer-vector-width=512 -Ofast -flto -fno-strict-aliasing -fno-unsafe-math-optimizations -fno-finite-math-only -funroll-loops`

C++ benchmarks:
`-std=c++03 -m64 -fprofile-generate`(pass 1) `-fprofile-use`(pass 2) `-march=native -mprefer-vector-width=512 -Ofast -flto -fno-strict-aliasing -fno-unsafe-math-optimizations -fno-finite-math-only -funroll-loops`

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Feb 18 04:19:08 2026 by SPEC CPU2006 PS/PDF formatter v6401.