

SPEC[®] CFP2006 Result

Copyright 2006-2026 Standard Performance Evaluation Corporation

Microsoft Corporation

(Test Sponsor: Kenji Mouri)

Azure Standard D64as v7

SPECfp[®]_rate2006 = Not Run

SPECfp_rate_base2006 = 1640

CPU2006 license: 3939


Test sponsor: Kenji Mouri

Tested by: Misaki

Test date: Feb-2026

Hardware Availability: Feb-2026

Software Availability: Jan-2026

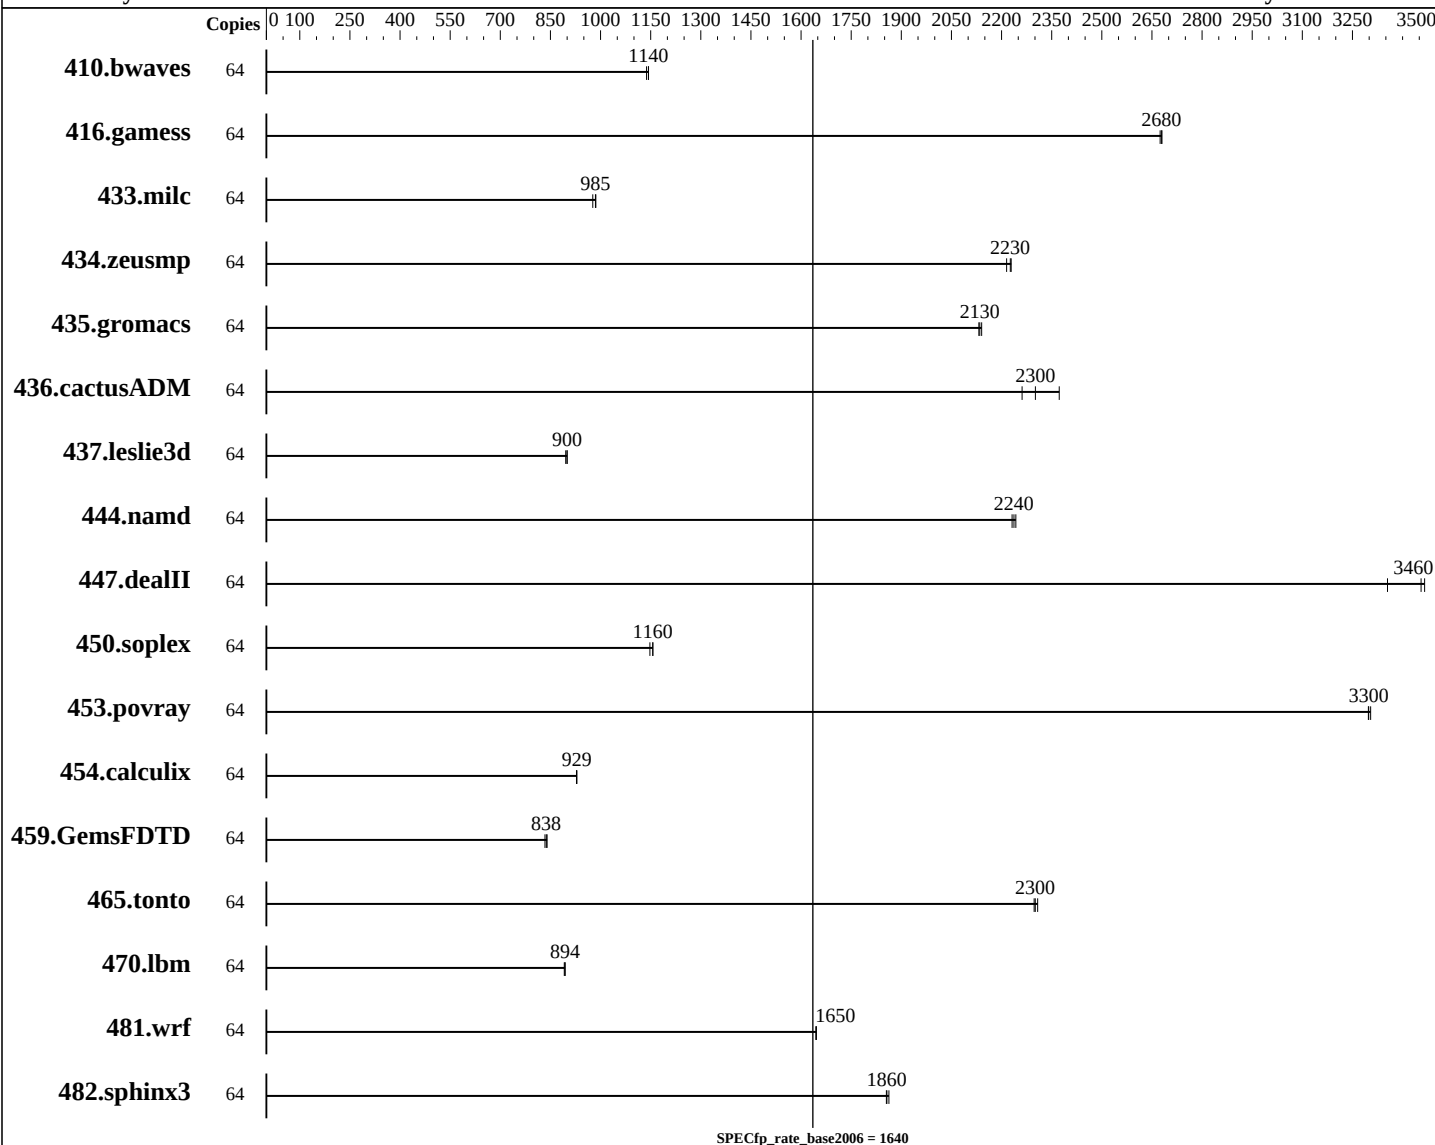

Hardware

CPU Name: AMD EPYC 9V45 96-Core
CPU Characteristics: AMD EPYC 9V45 96-Core @ 4.3GHz
CPU MHz: 4300
FPU: Integrated
CPU(s) enabled: 32 cores, 1 chip, 32 cores/chip, 2 threads/core
CPU(s) orderable: 1 chips
Primary Cache: 1 MB I + 1.5 MB D on chip per core
Secondary Cache: 32 MB I+D on chip per core

Continued on next page

Software

Operating System: Debian GNU/Linux 12 (bookworm)
6.1.0-43-cloud-amd64
Compiler: C/C++/Fortran: Version 12.2.0 of GCC, the GNU Compiler Collection
Auto Parallel: No
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2026 Standard Performance Evaluation Corporation

Microsoft Corporation
(Test Sponsor: Kenji Mouri)

SPECfp_rate2006 = Not Run

Azure Standard D64as v7

SPECfp_rate_base2006 = 1640

CPU2006 license: 3939

Test sponsor: Kenji Mouri

Tested by: Misaki

Test date: Feb-2026

Hardware Availability: Feb-2026

Software Availability: Jan-2026

L3 Cache: 512 MB
Other Cache: None
Memory: 256 GB
Disk Subsystem: 256 GB Premium SSD
Other Hardware: None

Peak Pointers: Not Applicable
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	761	1140	765	1140	<u>761</u>	<u>1140</u>							
416.gamess	64	<u>468</u>	<u>2680</u>	468	2680	469	2670							
433.milc	64	596	986	602	977	<u>597</u>	<u>985</u>							
434.zeusmp	64	<u>262</u>	<u>2230</u>	263	2220	261	2230							
435.gromacs	64	214	2130	213	2140	<u>214</u>	<u>2130</u>							
436.cactusADM	64	<u>332</u>	<u>2300</u>	338	2260	322	2370							
437.leslie3d	64	669	900	672	896	<u>669</u>	<u>900</u>							
444.namd	64	229	2240	230	2230	<u>229</u>	<u>2240</u>							
447.dealII	64	<u>212</u>	<u>3460</u>	211	3470	218	3350							
450.soplex	64	<u>462</u>	<u>1160</u>	465	1150	461	1160							
453.povray	64	103	3300	103	3300	<u>103</u>	<u>3300</u>							
454.calculix	64	<u>569</u>	<u>929</u>	569	928	568	929							
459.GemsFDTD	64	<u>811</u>	<u>838</u>	815	834	808	840							
465.tonto	64	273	2310	274	2300	<u>274</u>	<u>2300</u>							
470.lbm	64	<u>984</u>	<u>894</u>	987	891	984	894							
481.wrf	64	434	1650	<u>435</u>	<u>1650</u>	435	1650							
482.sphinx3	64	<u>672</u>	<u>1860</u>	672	1860	670	1860							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Platform Notes

Sysinfo program /home/misaki/Library/cpu2006/Docs/sysinfo.new
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on HimiMisakiBenchmarkAMD64 Thu Feb 19 09:47:25 2026

This section contains SUT (System Under Test) info as seen by
some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : AMD EPYC 9V45 96-Core Processor

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2026 Standard Performance Evaluation Corporation

Microsoft Corporation

(Test Sponsor: Kenji Mouri)

Azure Standard D64as v7

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1640

CPU2006 license: 3939

Test sponsor: Kenji Mouri

Tested by: Misaki

Test date: Feb-2026

Hardware Availability: Feb-2026

Software Availability: Jan-2026

Platform Notes (Continued)

```
1 "physical id"s (chips)
64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 32
  siblings  : 64
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21
                22 23 24 25 26 27 28 29 30 31
cache size : 1024 KB

From /proc/meminfo
MemTotal:      263921476 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

/usr/bin/lsb_release -d
Debian GNU/Linux 12 (bookworm)

From /etc/*release* /etc/*version*
cloud-release:
  ID=azure
  VERSION="20260210-2384"
debian_version: 12.13
os-release:
  PRETTY_NAME="Debian GNU/Linux 12 (bookworm)"
  NAME="Debian GNU/Linux"
  VERSION_ID="12"
  VERSION="12 (bookworm)"
  VERSION_CODENAME=bookworm
  ID=debian
  HOME_URL="https://www.debian.org/"
  SUPPORT_URL="https://www.debian.org/support"

uname -a:
Linux HimiMisakiBenchmarkAMD64 6.1.0-43-cloud-amd64 #1 SMP PREEMPT_DYNAMIC
Debian 6.1.162-1 (2026-02-08) x86_64 GNU/Linux

run-level 5 Feb 17 04:26

SPEC is set to: /home/misaki/Library/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p1 ext4  252G   8.2G  233G   4% /

(End of data from sysinfo program)
```

Base Compiler Invocation

C benchmarks:
gcc

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2026 Standard Performance Evaluation Corporation

Microsoft Corporation

(Test Sponsor: Kenji Mouri)

Azure Standard D64as v7

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1640

CPU2006 license: 3939

Test sponsor: Kenji Mouri

Tested by: Misaki

Test date: Feb-2026

Hardware Availability: Feb-2026

Software Availability: Jan-2026

Base Compiler Invocation (Continued)

C++ benchmarks:

g++

Fortran benchmarks:

gfortran

Benchmarks using both Fortran and C:

gcc gfortran

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64 -fsigned-char

Base Optimization Flags

C benchmarks:

-std=gnu89 -m64 -march=native -O2 -flto -fno-strict-aliasing

C++ benchmarks:

-std=c++03 -m64 -march=native -O2 -flto -fno-strict-aliasing

Fortran benchmarks:

-std=legacy -m64 -march=native -O2 -flto -fno-strict-aliasing

Benchmarks using both Fortran and C:

-std=gnu89 -m64 -std=legacy -march=native -O2 -flto
-fno-strict-aliasing

SPEC CFP2006 Result

Copyright 2006-2026 Standard Performance Evaluation Corporation

Microsoft Corporation

(Test Sponsor: Kenji Mouri)

Azure Standard D64as v7

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1640

CPU2006 license: 3939

Test sponsor: Kenji Mouri

Tested by: Misaki

Test date: Feb-2026

Hardware Availability: Feb-2026

Software Availability: Jan-2026

Base Other Flags

Fortran benchmarks:

416.gamess: -funconstrained-commons

Benchmarks using both Fortran and C:

481.wrf: -fallow-argument-mismatch

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Feb 19 16:47:11 2026 by SPEC CPU2006 PS/PDF formatter v6401.