

SPEC[®] CINT2006 Result

Copyright 2006-2026 Standard Performance Evaluation Corporation

Microsoft Corporation

(Test Sponsor: Kenji Mouri)

Azure Standard D64as v7

SPECint[®]2006 = 81.9

SPECint_base2006 = 74.2

CPU2006 license: 3939


Test sponsor: Kenji Mouri

Tested by: Misaki

Test date: Feb-2026

Hardware Availability: Feb-2026

Software Availability: Jan-2026

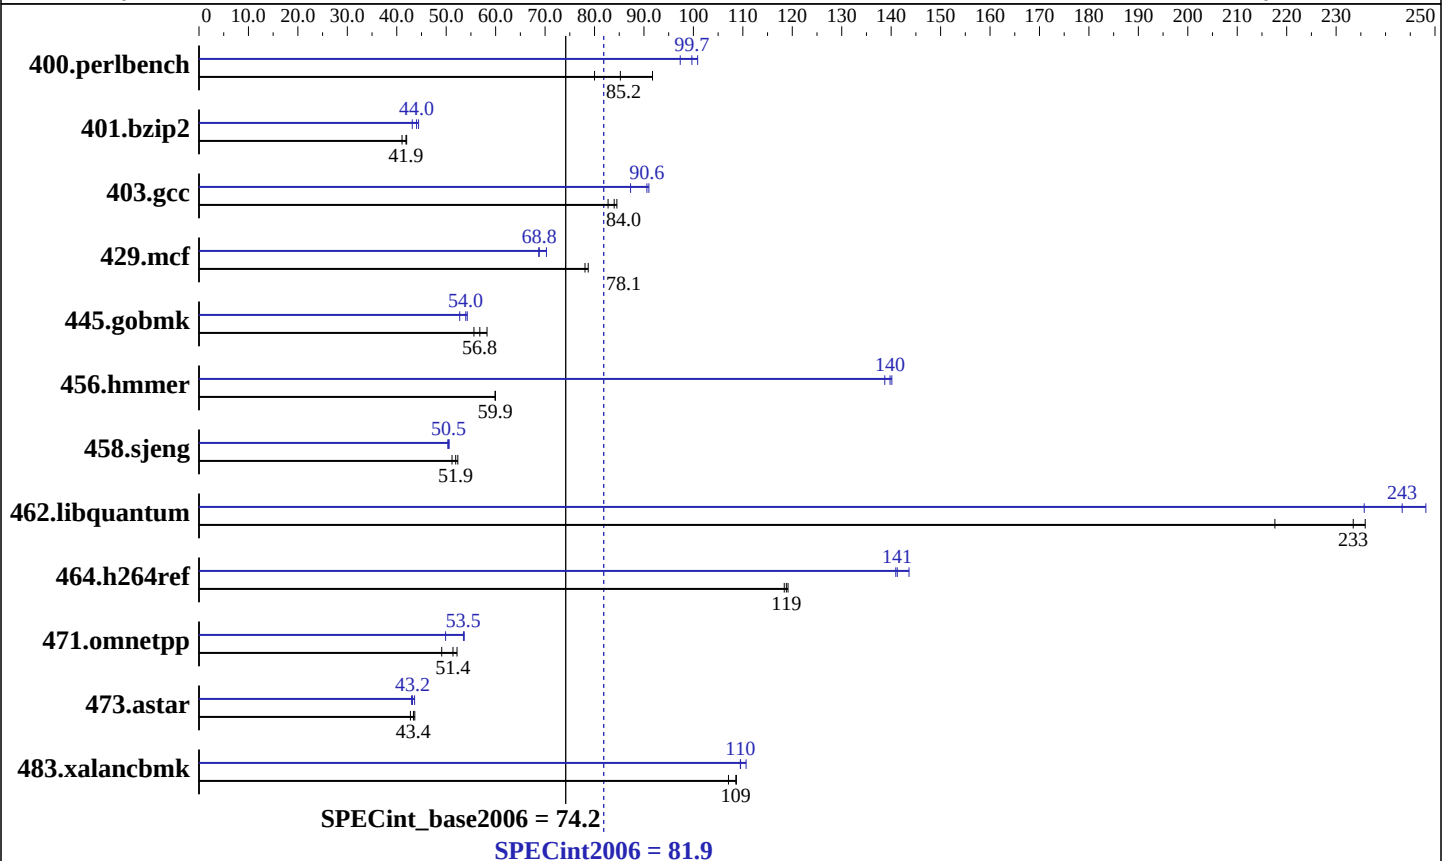

Hardware

CPU Name: AMD EPYC 9V45 96-Core
CPU Characteristics: AMD EPYC 9V45 96-Core @ 4.6GHz
CPU MHz: 4600
FPU: Integrated
CPU(s) enabled: 32 cores, 1 chip, 32 cores/chip, 2 threads/core
CPU(s) orderable: 1 chips
Primary Cache: 1 MB I + 1.5 MB D on chip per core
Secondary Cache: 32 MB I+D on chip per core
L3 Cache: 512 MB
Other Cache: None
Memory: 256 GB
Disk Subsystem: 256 GB Premium SSD
Other Hardware: None

Software

Operating System: Debian GNU/Linux 12 (bookworm)
6.1.0-43-cloud-amd64
Compiler: C/C++/Fortran: Version 12.2.0 of GCC, the GNU Compiler Collection
Auto Parallel: No
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other Software: None

SPEC CINT2006 Result

Copyright 2006-2026 Standard Performance Evaluation Corporation

Microsoft Corporation

(Test Sponsor: Kenji Mouri)

Azure Standard D64as v7

SPECint2006 =

81.9

SPECint_base2006 =

74.2

CPU2006 license: 3939

Test sponsor: Kenji Mouri

Tested by: Misaki

Test date: Feb-2026

Hardware Availability: Feb-2026

Software Availability: Jan-2026

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<u>115</u>	<u>85.2</u>	107	91.7	122	80.0	<u>98.0</u>	<u>99.7</u>	100	97.3	96.9	101
401.bzip2	<u>231</u>	<u>41.9</u>	230	42.0	235	41.1	<u>219</u>	<u>44.0</u>	224	43.1	217	44.4
403.gcc	95.2	84.5	<u>95.9</u>	<u>84.0</u>	97.3	82.7	88.5	91.0	92.2	87.3	<u>88.9</u>	<u>90.6</u>
429.mcf	<u>117</u>	<u>78.1</u>	116	78.7	123	74.1	133	68.7	<u>133</u>	<u>68.8</u>	130	70.3
445.gobmk	<u>185</u>	<u>56.8</u>	180	58.3	189	55.6	<u>194</u>	<u>54.0</u>	199	52.7	193	54.3
456.hmmer	<u>156</u>	<u>59.9</u>	156	60.0	156	59.9	67.3	139	66.6	140	<u>66.8</u>	<u>140</u>
458.sjeng	231	52.4	<u>233</u>	<u>51.9</u>	236	51.2	<u>240</u>	<u>50.5</u>	239	50.6	240	50.3
462.libquantum	95.2	218	87.8	236	<u>88.8</u>	<u>233</u>	87.9	236	83.5	248	<u>85.1</u>	<u>243</u>
464.h264ref	<u>186</u>	<u>119</u>	187	118	186	119	154	144	157	141	<u>157</u>	<u>141</u>
471.omnetpp	120	52.2	<u>122</u>	<u>51.4</u>	127	49.1	<u>117</u>	<u>53.5</u>	116	53.6	125	49.9
473.astar	161	43.6	164	42.8	<u>162</u>	<u>43.4</u>	161	43.6	<u>163</u>	<u>43.2</u>	163	43.0
483.xalancbmk	<u>63.5</u>	<u>109</u>	64.4	107	63.5	109	62.4	111	63.0	109	<u>63.0</u>	<u>110</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

Sysinfo program /home/misaki/Library/cpu2006/Docs/sysinfo.new
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on HimiMisakiBenchmarkAMD64 Tue Feb 17 08:59:37 2026

This section contains SUT (System Under Test) info as seen by
some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 9V45 96-Core Processor

1 "physical id"s (chips)

64 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)

cpu cores : 32

siblings : 64

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21
22 23 24 25 26 27 28 29 30 31

cache size : 1024 KB

From /proc/meminfo

MemTotal: 263921476 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb_release -d

Debian GNU/Linux 12 (bookworm)

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2

SPEC CINT2006 Result

Copyright 2006-2026 Standard Performance Evaluation Corporation

Microsoft Corporation

(Test Sponsor: Kenji Mouri)

Azure Standard D64as v7

SPECint2006 =

81.9

SPECint_base2006 =

74.2

CPU2006 license: 3939

Test sponsor: Kenji Mouri

Tested by: Misaki

Test date: Feb-2026

Hardware Availability: Feb-2026

Software Availability: Jan-2026

Platform Notes (Continued)

From /etc/*release* /etc/*version*

cloud-release:

ID=azure

VERSION="20260210-2384"

debian_version: 12.13

os-release:

PRETTY_NAME="Debian GNU/Linux 12 (bookworm)"

NAME="Debian GNU/Linux"

VERSION_ID="12"

VERSION="12 (bookworm)"

VERSION_CODENAME=bookworm

ID=debian

HOME_URL="https://www.debian.org/"

SUPPORT_URL="https://www.debian.org/support"

uname -a:

Linux HimiMisakiBenchmarkAMD64 6.1.0-43-cloud-amd64 #1 SMP PREEMPT_DYNAMIC

Debian 6.1.162-1 (2026-02-08) x86_64 GNU/Linux

run-level 5 Feb 17 04:26

SPEC is set to: /home/misaki/Library/cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p1	ext4	252G	8.2G	233G	4%	/

(End of data from sysinfo program)

Base Compiler Invocation

C benchmarks:

gcc

C++ benchmarks:

g++

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

445.gobmk: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

464.h264ref: -DSPEC_CPU_LP64 -fsigned-char

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 3

SPEC CINT2006 Result

Copyright 2006-2026 Standard Performance Evaluation Corporation

Microsoft Corporation

(Test Sponsor: Kenji Mouri)

Azure Standard D64as v7

SPECint2006 =

81.9

SPECint_base2006 =

74.2

CPU2006 license: 3939

Test sponsor: Kenji Mouri

Tested by: Misaki

Test date: Feb-2026

Hardware Availability: Feb-2026

Software Availability: Jan-2026

Base Portability Flags (Continued)

471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-std=gnu89 -m64 -march=native -O2 -flto -fno-strict-aliasing
C++ benchmarks:
-std=c++03 -m64 -march=native -O2 -flto -fno-strict-aliasing

Peak Compiler Invocation

C benchmarks:
gcc
C++ benchmarks:
g++

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:
-std=gnu89 -m64 -fprofile-generate(pass 1) -fprofile-use(pass 2)
-march=native -Ofast -flto -fno-strict-aliasing
-fno-unsafe-math-optimizations -fno-finite-math-only -funroll-loops
C++ benchmarks:
-std=c++03 -m64 -fprofile-generate(pass 1) -fprofile-use(pass 2)
-march=native -Ofast -flto -fno-strict-aliasing
-fno-unsafe-math-optimizations -fno-finite-math-only -funroll-loops

SPEC CINT2006 Result

Copyright 2006-2026 Standard Performance Evaluation Corporation

Microsoft Corporation

(Test Sponsor: Kenji Mouri)

Azure Standard D64as v7

SPECint2006 = 81.9

SPECint_base2006 = 74.2

CPU2006 license: 3939

Test sponsor: Kenji Mouri

Tested by: Misaki

Test date: Feb-2026

Hardware Availability: Feb-2026

Software Availability: Jan-2026

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Feb 17 12:27:20 2026 by SPEC CPU2006 PS/PDF formatter v6401.