

SPEC[®] CFP2006 Result

Copyright 2006-2026 Standard Performance Evaluation Corporation

Microsoft Corporation

(Test Sponsor: Kenji Mouri)

Azure Standard D64s v6

SPECfp[®]_rate2006 = Not Run

SPECfp_rate_base2006 = 1400

CPU2006 license: 3939


Test sponsor: Kenji Mouri

Tested by: Misaki

Test date: Feb-2026

Hardware Availability: Feb-2026

Software Availability: Jan-2026

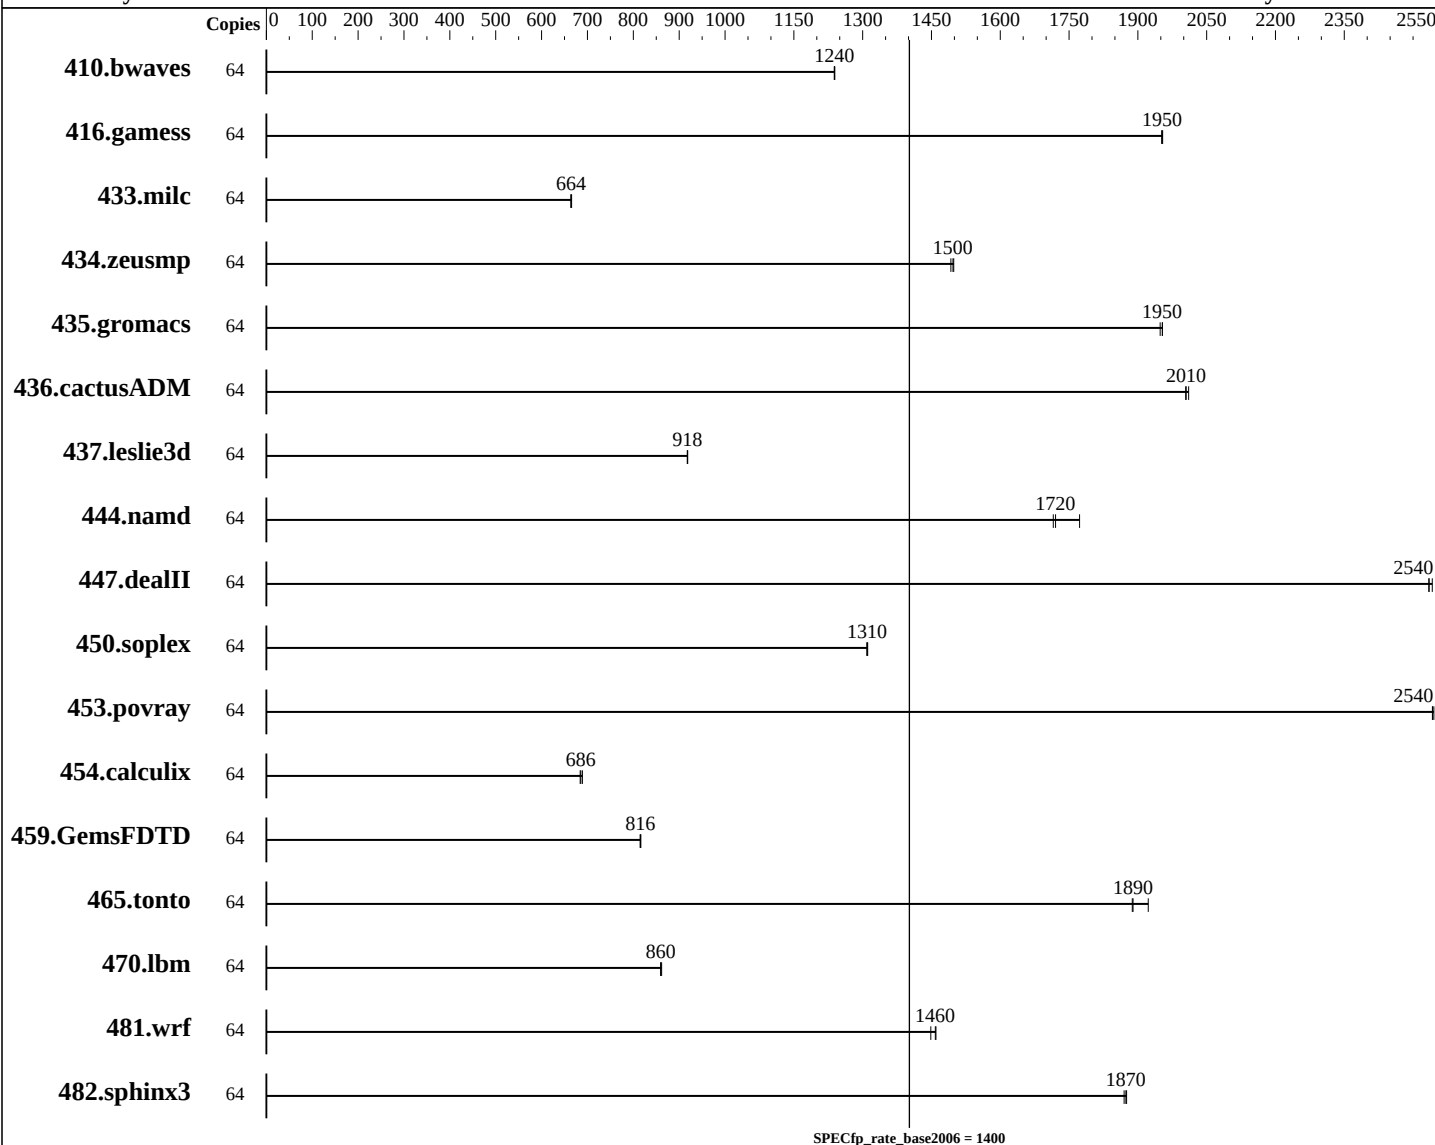

Hardware

CPU Name: INTEL XEON PLATINUM 8573C
CPU Characteristics: INTEL XEON PLATINUM 8573C @ 3.6GHz
CPU MHz: 3600
FPU: Integrated
CPU(s) enabled: 32 cores, 1 chip, 32 cores/chip, 2 threads/core
CPU(s) orderable: 1 chips
Primary Cache: 1 MB I + 1.5 MB D on chip per core
Secondary Cache: 64 MB I+D on chip per core

Continued on next page

Software

Operating System: Debian GNU/Linux 12 (bookworm)
6.1.0-43-cloud-amd64
Compiler: C/C++/Fortran: Version 12.2.0 of GCC, the GNU Compiler Collection
Auto Parallel: No
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2026 Standard Performance Evaluation Corporation

Microsoft Corporation
(Test Sponsor: Kenji Mouri)

Azure Standard D64s v6

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1400

CPU2006 license: 3939

Test sponsor: Kenji Mouri

Tested by: Misaki

Test date: Feb-2026

Hardware Availability: Feb-2026

Software Availability: Jan-2026

L3 Cache: 260 MB
Other Cache: None
Memory: 256 GB
Disk Subsystem: 256 GB Premium SSD
Other Hardware: None

Peak Pointers: Not Applicable
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	702	1240	703	1240	<u>702</u>	<u>1240</u>									
416.gamess	64	<u>642</u>	<u>1950</u>	641	1950	642	1950									
433.milc	64	883	665	885	664	<u>885</u>	<u>664</u>									
434.zeusmp	64	<u>389</u>	<u>1500</u>	390	1490	389	1500									
435.gromacs	64	234	1950	<u>234</u>	<u>1950</u>	235	1950									
436.cactusADM	64	380	2010	<u>381</u>	<u>2010</u>	382	2000									
437.leslie3d	64	655	918	655	919	<u>655</u>	<u>918</u>									
444.namd	64	290	1770	<u>298</u>	<u>1720</u>	299	1720									
447.dealII	64	<u>289</u>	<u>2540</u>	289	2530	288	2540									
450.soplex	64	408	1310	<u>407</u>	<u>1310</u>	407	1310									
453.povray	64	134	2540	134	2550	<u>134</u>	<u>2540</u>									
454.calculix	64	<u>770</u>	<u>686</u>	772	684	766	689									
459.GemsFDTD	64	833	815	<u>832</u>	<u>816</u>	832	816									
465.tonto	64	328	1920	334	1890	<u>333</u>	<u>1890</u>									
470.lbm	64	1023	860	1020	862	<u>1022</u>	<u>860</u>									
481.wrf	64	490	1460	<u>490</u>	<u>1460</u>	494	1450									
482.sphinx3	64	667	1870	<u>666</u>	<u>1870</u>	665	1880									

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Platform Notes

Sysinfo program /home/misaki/Library/cpu2006/Docs/sysinfo.new
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on HimiMisakiBenchmarkIntel64 Sun Feb 15 02:28:58 2026

This section contains SUT (System Under Test) info as seen by
some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : INTEL(R) XEON(R) PLATINUM 8573C

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2026 Standard Performance Evaluation Corporation

Microsoft Corporation

(Test Sponsor: Kenji Mouri)

Azure Standard D64s v6

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1400

CPU2006 license: 3939

Test sponsor: Kenji Mouri

Tested by: Misaki

Test date: Feb-2026

Hardware Availability: Feb-2026

Software Availability: Jan-2026

Platform Notes (Continued)

```
1 "physical id"s (chips)
64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 32
siblings  : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21
22 23 24 25 26 27 28 29 30 31
cache size : 266240 KB

From /proc/meminfo
MemTotal:      263920464 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

/usr/bin/lsb_release -d
Debian GNU/Linux 12 (bookworm)

From /etc/*release* /etc/*version*
cloud-release:
ID=azure
VERSION="20260210-2384"
debian_version: 12.13
os-release:
PRETTY_NAME="Debian GNU/Linux 12 (bookworm)"
NAME="Debian GNU/Linux"
VERSION_ID="12"
VERSION="12 (bookworm)"
VERSION_CODENAME=bookworm
ID=debian
HOME_URL="https://www.debian.org/"
SUPPORT_URL="https://www.debian.org/support"

uname -a:
Linux HimiMisakiBenchmarkIntel64 6.1.0-43-cloud-amd64 #1 SMP PREEMPT_DYNAMIC
Debian 6.1.162-1 (2026-02-08) x86_64 GNU/Linux

run-level 5 Feb 12 10:05

SPEC is set to: /home/misaki/Library/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p1 ext4  252G  8.4G  233G   4% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

(End of data from sysinfo program)

SPEC CFP2006 Result

Copyright 2006-2026 Standard Performance Evaluation Corporation

Microsoft Corporation

(Test Sponsor: Kenji Mouri)

Azure Standard D64s v6

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1400

CPU2006 license: 3939

Test sponsor: Kenji Mouri

Tested by: Misaki

Test date: Feb-2026

Hardware Availability: Feb-2026

Software Availability: Jan-2026

Base Compiler Invocation

C benchmarks:

gcc

C++ benchmarks:

g++

Fortran benchmarks:

gfortran

Benchmarks using both Fortran and C:

gcc gfortran

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64 -fsigned-char

Base Optimization Flags

C benchmarks:

-std=gnu89 -m64 -march=native -O2 -flto -fno-strict-aliasing

C++ benchmarks:

-std=c++03 -m64 -march=native -O2 -flto -fno-strict-aliasing

Fortran benchmarks:

-std=legacy -m64 -march=native -O2 -flto -fno-strict-aliasing

Benchmarks using both Fortran and C:

-std=gnu89 -m64 -std=legacy -march=native -O2 -flto
-fno-strict-aliasing

SPEC CFP2006 Result

Copyright 2006-2026 Standard Performance Evaluation Corporation

Microsoft Corporation
(Test Sponsor: Kenji Mouri)

SPECfp_rate2006 = Not Run

Azure Standard D64s v6

SPECfp_rate_base2006 = 1400

CPU2006 license: 3939

Test sponsor: Kenji Mouri

Tested by: Misaki

Test date: Feb-2026

Hardware Availability: Feb-2026

Software Availability: Jan-2026

Base Other Flags

Fortran benchmarks:

416.gamess: -funconstrained-commons

Benchmarks using both Fortran and C:

481.wrf: -fallow-argument-mismatch

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Sun Feb 15 10:25:13 2026 by SPEC CPU2006 PS/PDF formatter v6401.