

SPEC® CINT2006 Result

Copyright 2006-2026 Standard Performance Evaluation Corporation

Microsoft Corporation

(Test Sponsor: Kenji Mouri)

Azure Standard D64s v6

SPECint®_rate2006 = 1610

SPECint_rate_base2006 = 1460

CPU2006 license: 3939


Test sponsor: Kenji Mouri

Tested by: Misaki

Test date: Feb-2026

Hardware Availability: Feb-2026

Software Availability: Jan-2026

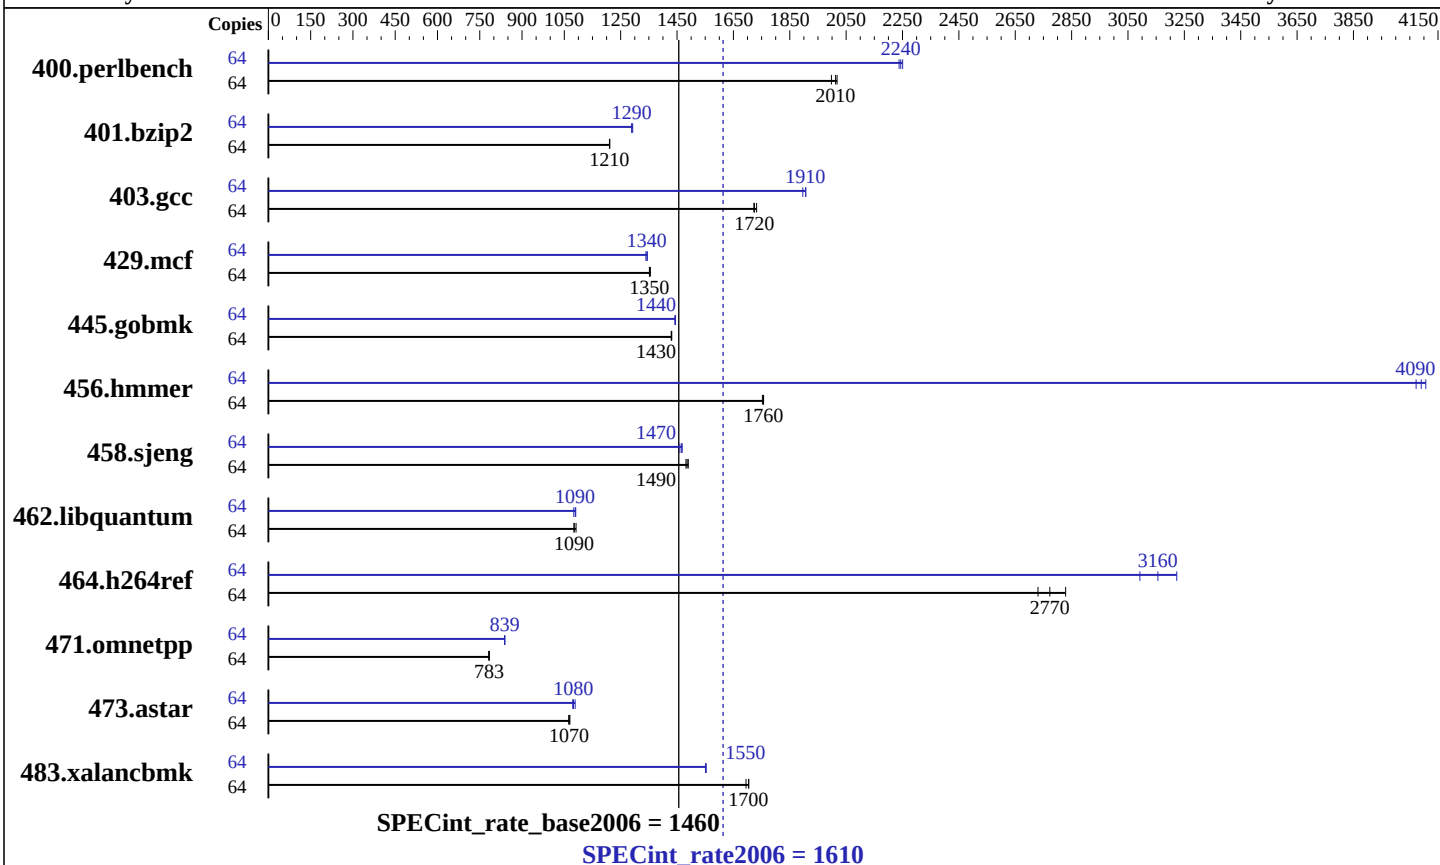

Hardware

CPU Name: INTEL XEON PLATINUM 8573C
CPU Characteristics: INTEL XEON PLATINUM 8573C @ 3.6GHz
CPU MHz: 3600
FPU: Integrated
CPU(s) enabled: 32 cores, 1 chip, 32 cores/chip, 2 threads/core
CPU(s) orderable: 1 chips
Primary Cache: 1 MB I + 1.5 MB D on chip per core
Secondary Cache: 64 MB I+D on chip per core
L3 Cache: 260 MB
Other Cache: None
Memory: 256 GB
Disk Subsystem: 256 GB Premium SSD
Other Hardware: None

Software

Operating System: Debian GNU/Linux 12 (bookworm)
6.1.0-43-cloud-amd64
Compiler: C/C++/Fortran: Version 12.2.0 of GCC, the GNU Compiler Collection
Auto Parallel: No
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other Software: None

SPEC CINT2006 Result

Copyright 2006-2026 Standard Performance Evaluation Corporation

Microsoft Corporation

(Test Sponsor: Kenji Mouri)

Azure Standard D64s v6

SPECint_rate2006 = 1610

SPECint_rate_base2006 = 1460

CPU2006 license: 3939

Test sponsor: Kenji Mouri

Tested by: Misaki

Test date: Feb-2026

Hardware Availability: Feb-2026

Software Availability: Jan-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	313	2000	310	2020	<u>311</u>	<u>2010</u>	64	<u>279</u>	<u>2240</u>	279	2240	278	2250
401.bzip2	64	<u>510</u>	<u>1210</u>	510	1210	510	1210	64	479	1290	478	1290	<u>479</u>	<u>1290</u>
403.gcc	64	297	1730	<u>299</u>	<u>1720</u>	299	1720	64	<u>270</u>	<u>1910</u>	270	1910	272	1900
429.mcf	64	431	1360	<u>432</u>	<u>1350</u>	432	1350	64	436	1340	434	1340	<u>435</u>	<u>1340</u>
445.gobmk	64	470	1430	<u>469</u>	<u>1430</u>	469	1430	64	465	1440	466	1440	<u>465</u>	<u>1440</u>
456.hammer	64	341	1750	<u>340</u>	<u>1760</u>	340	1760	64	<u>146</u>	<u>4090</u>	147	4070	145	4110
458.sjeng	64	520	1490	523	1480	<u>521</u>	<u>1490</u>	64	530	1460	527	1470	<u>528</u>	<u>1470</u>
462.libquantum	64	1215	1090	<u>1222</u>	<u>1090</u>	1223	1080	64	1224	1080	<u>1218</u>	<u>1090</u>	1216	1090
464.h264ref	64	501	2830	<u>511</u>	<u>2770</u>	519	2730	64	<u>449</u>	<u>3160</u>	458	3090	439	3220
471.omnetpp	64	<u>511</u>	<u>783</u>	512	782	510	784	64	477	839	477	839	<u>477</u>	<u>839</u>
473.astar	64	422	1070	<u>421</u>	<u>1070</u>	420	1070	64	<u>415</u>	<u>1080</u>	413	1090	416	1080
483.xalancbmk	64	261	1690	<u>259</u>	<u>1700</u>	259	1700	64	285	1550	284	1550	<u>285</u>	<u>1550</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Platform Notes

Sysinfo program /home/misaki/Library/cpu2006/Docs/sysinfo.new
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on HimiMisakiBenchmarkIntel64 Sat Feb 14 16:21:24 2026

This section contains SUT (System Under Test) info as seen by
some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : INTEL(R) XEON(R) PLATINUM 8573C
1 "physical id"s (chips)
64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 32
siblings : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21
22 23 24 25 26 27 28 29 30 31
cache size : 266240 KB
```

```
From /proc/meminfo
MemTotal: 263920464 kB
```

Continued on next page

SPEC CINT2006 Result

Copyright 2006-2026 Standard Performance Evaluation Corporation

Microsoft Corporation

(Test Sponsor: Kenji Mouri)

Azure Standard D64s v6

SPECint_rate2006 = 1610

SPECint_rate_base2006 = 1460

CPU2006 license: 3939

Test sponsor: Kenji Mouri

Tested by: Misaki

Test date: Feb-2026

Hardware Availability: Feb-2026

Software Availability: Jan-2026

Platform Notes (Continued)

HugePages_Total: 0
Hugepagesize: 2048 kB

/usr/bin/lsb_release -d
Debian GNU/Linux 12 (bookworm)

From /etc/*release* /etc/*version*

cloud-release:

ID=azure

VERSION="20260210-2384"

debian_version: 12.13

os-release:

PRETTY_NAME="Debian GNU/Linux 12 (bookworm)"

NAME="Debian GNU/Linux"

VERSION_ID="12"

VERSION="12 (bookworm)"

VERSION_CODENAME=bookworm

ID=debian

HOME_URL="https://www.debian.org/"

SUPPORT_URL="https://www.debian.org/support"

uname -a:

Linux HimiMisakiBenchmarkIntel64 6.1.0-43-cloud-amd64 #1 SMP PREEMPT_DYNAMIC

Debian 6.1.162-1 (2026-02-08) x86_64 GNU/Linux

run-level 5 Feb 12 10:05

SPEC is set to: /home/misaki/Library/cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
------------	------	------	------	-------	------	------------

/dev/nvme0n1p1	ext4	252G	8.4G	233G	4%	/
----------------	------	------	------	------	----	---

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

(End of data from sysinfo program)

Base Compiler Invocation

C benchmarks:

gcc

C++ benchmarks:

g++

SPEC CINT2006 Result

Copyright 2006-2026 Standard Performance Evaluation Corporation

Microsoft Corporation

(Test Sponsor: Kenji Mouri)

Azure Standard D64s v6

SPECint_rate2006 = 1610

SPECint_rate_base2006 = 1460

CPU2006 license: 3939

Test sponsor: Kenji Mouri

Tested by: Misaki

Test date: Feb-2026

Hardware Availability: Feb-2026

Software Availability: Jan-2026

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmcr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64 -fsigned-char
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-std=gnu89 -m64 -march=native -O2 -flto -fno-strict-aliasing

C++ benchmarks:

-std=c++03 -m64 -march=native -O2 -flto -fno-strict-aliasing

Peak Compiler Invocation

C benchmarks:

gcc

C++ benchmarks:

g++

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

-std=gnu89 -m64 -fprofile-generate(pass 1) -fprofile-use(pass 2)
-march=native -Ofast -flto -fno-strict-aliasing
-fno-unsafe-math-optimizations -fno-finite-math-only -funroll-loops

C++ benchmarks:

-std=c++03 -m64 -fprofile-generate(pass 1) -fprofile-use(pass 2)
-march=native -Ofast -flto -fno-strict-aliasing

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4

SPEC CINT2006 Result

Copyright 2006-2026 Standard Performance Evaluation Corporation

Microsoft Corporation

(Test Sponsor: Kenji Mouri)

Azure Standard D64s v6

SPECint_rate2006 = 1610

SPECint_rate_base2006 = 1460

CPU2006 license: 3939

Test sponsor: Kenji Mouri

Tested by: Misaki

Test date: Feb-2026

Hardware Availability: Feb-2026

Software Availability: Jan-2026

Peak Optimization Flags (Continued)

C++ benchmarks (continued):

-fno-unsafe-math-optimizations -fno-finite-math-only -funroll-loops

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Sun Feb 15 02:21:00 2026 by SPEC CPU2006 PS/PDF formatter v6401.