

SPEC® CINT2006 Result

Copyright 2006-2026 Standard Performance Evaluation Corporation

Microsoft Corporation

(Test Sponsor: Kenji Mouri)

Azure Standard D64as v7

SPECint®_rate2006 = 1880

SPECint_rate_base2006 = 1670

CPU2006 license: 3939


Test sponsor: Kenji Mouri

Tested by: Misaki

Test date: Feb-2026

Hardware Availability: Feb-2026

Software Availability: Jan-2026

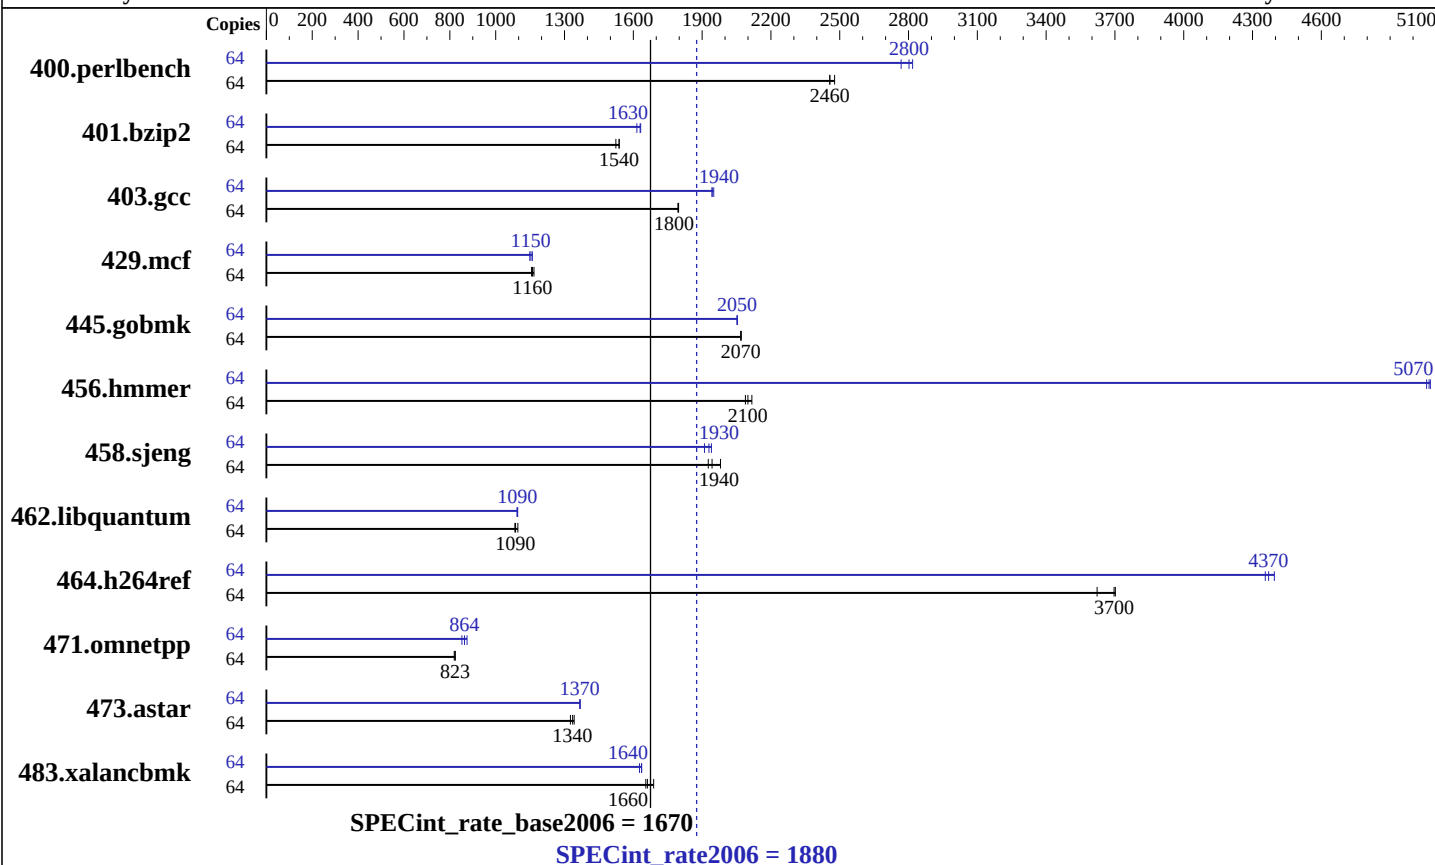

Hardware

CPU Name: AMD EPYC 9V45 96-Core
CPU Characteristics: AMD EPYC 9V45 96-Core @ 4.3GHz
CPU MHz: 4300
FPU: Integrated
CPU(s) enabled: 32 cores, 1 chip, 32 cores/chip, 2 threads/core
CPU(s) orderable: 1 chips
Primary Cache: 1 MB I + 1.5 MB D on chip per core
Secondary Cache: 32 MB I+D on chip per core
L3 Cache: 512 MB
Other Cache: None
Memory: 256 GB
Disk Subsystem: 256 GB Premium SSD
Other Hardware: None

Software

Operating System: Debian GNU/Linux 12 (bookworm)
6.1.0-43-cloud-amd64
Compiler: C/C++/Fortran: Version 12.2.0 of GCC, the GNU Compiler Collection
Auto Parallel: No
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other Software: None

SPEC CINT2006 Result

Copyright 2006-2026 Standard Performance Evaluation Corporation

Microsoft Corporation

(Test Sponsor: Kenji Mouri)

Azure Standard D64as v7

SPECint_rate2006 = 1880

SPECint_rate_base2006 = 1670

CPU2006 license: 3939

Test sponsor: Kenji Mouri

Tested by: Misaki

Test date: Feb-2026

Hardware Availability: Feb-2026

Software Availability: Jan-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	255	2460	252	2480	<u>255</u>	<u>2460</u>	64	226	2770	222	2820	<u>223</u>	<u>2800</u>
401.bzip2	64	<u>402</u>	<u>1540</u>	401	1540	405	1520	64	382	1620	378	1630	<u>379</u>	<u>1630</u>
403.gcc	64	287	1800	<u>287</u>	<u>1800</u>	287	1790	64	<u>265</u>	<u>1940</u>	265	1940	264	1950
429.mcf	64	500	1170	<u>503</u>	<u>1160</u>	505	1160	64	<u>506</u>	<u>1150</u>	508	1150	503	1160
445.gobmk	64	324	2070	<u>324</u>	<u>2070</u>	325	2070	64	327	2050	327	2050	<u>327</u>	<u>2050</u>
456.hammer	64	282	2120	<u>284</u>	<u>2100</u>	286	2090	64	<u>118</u>	<u>5070</u>	118	5080	118	5060
458.sjeng	64	402	1930	<u>398</u>	<u>1940</u>	391	1980	64	399	1940	<u>401</u>	<u>1930</u>	405	1910
462.libquantum	64	1209	1100	<u>1220</u>	<u>1090</u>	1224	1080	64	1210	1100	1214	1090	<u>1211</u>	<u>1090</u>
464.h264ref	64	391	3620	<u>383</u>	<u>3700</u>	383	3700	64	<u>324</u>	<u>4370</u>	325	4360	322	4400
471.omnetpp	64	486	824	<u>486</u>	<u>823</u>	488	819	64	469	853	457	875	<u>463</u>	<u>864</u>
473.astar	64	335	1340	<u>336</u>	<u>1340</u>	339	1330	64	329	1370	328	1370	<u>329</u>	<u>1370</u>
483.xalancbmk	64	262	1690	<u>266</u>	<u>1660</u>	267	1650	64	<u>270</u>	<u>1640</u>	271	1630	270	1640

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Platform Notes

Sysinfo program /home/misaki/Library/cpu2006/Docs/sysinfo.new
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on HimiMisakiBenchmarkAMD64 Wed Feb 18 07:46:32 2026

This section contains SUT (System Under Test) info as seen by
some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 9V45 96-Core Processor

1 "physical id"s (chips)

64 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)

cpu cores : 32

siblings : 64

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21
22 23 24 25 26 27 28 29 30 31

cache size : 1024 KB

From /proc/meminfo

MemTotal: 263921476 kB

Continued on next page

SPEC CINT2006 Result

Copyright 2006-2026 Standard Performance Evaluation Corporation

Microsoft Corporation

(Test Sponsor: Kenji Mouri)

Azure Standard D64as v7

SPECint_rate2006 = 1880

SPECint_rate_base2006 = 1670

CPU2006 license: 3939

Test sponsor: Kenji Mouri

Tested by: Misaki

Test date: Feb-2026

Hardware Availability: Feb-2026

Software Availability: Jan-2026

Platform Notes (Continued)

HugePages_Total: 0
Hugepagesize: 2048 kB

/usr/bin/lsb_release -d
Debian GNU/Linux 12 (bookworm)

From /etc/*release* /etc/*version*

cloud-release:

ID=azure

VERSION="20260210-2384"

debian_version: 12.13

os-release:

PRETTY_NAME="Debian GNU/Linux 12 (bookworm)"

NAME="Debian GNU/Linux"

VERSION_ID="12"

VERSION="12 (bookworm)"

VERSION_CODENAME=bookworm

ID=debian

HOME_URL="https://www.debian.org/"

SUPPORT_URL="https://www.debian.org/support"

uname -a:

Linux HimiMisakiBenchmarkAMD64 6.1.0-43-cloud-amd64 #1 SMP PREEMPT_DYNAMIC

Debian 6.1.162-1 (2026-02-08) x86_64 GNU/Linux

run-level 5 Feb 17 04:26

SPEC is set to: /home/misaki/Library/cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p1	ext4	252G	8.2G	233G	4%	/

(End of data from sysinfo program)

Base Compiler Invocation

C benchmarks:

gcc

C++ benchmarks:

g++

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 3

SPEC CINT2006 Result

Copyright 2006-2026 Standard Performance Evaluation Corporation

Microsoft Corporation

(Test Sponsor: Kenji Mouri)

Azure Standard D64as v7

SPECint_rate2006 = 1880

SPECint_rate_base2006 = 1670

CPU2006 license: 3939

Test sponsor: Kenji Mouri

Tested by: Misaki

Test date: Feb-2026

Hardware Availability: Feb-2026

Software Availability: Jan-2026

Base Portability Flags (Continued)

445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64 -fsigned-char
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-std=gnu89 -m64 -march=native -O2 -flto -fno-strict-aliasing
C++ benchmarks:
-std=c++03 -m64 -march=native -O2 -flto -fno-strict-aliasing

Peak Compiler Invocation

C benchmarks:
gcc
C++ benchmarks:
g++

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:
-std=gnu89 -m64 -fprofile-generate(pass 1) -fprofile-use(pass 2)
-march=native -Ofast -flto -fno-strict-aliasing
-fno-unsafe-math-optimizations -fno-finite-math-only -funroll-loops
C++ benchmarks:
-std=c++03 -m64 -fprofile-generate(pass 1) -fprofile-use(pass 2)
-march=native -Ofast -flto -fno-strict-aliasing
-fno-unsafe-math-optimizations -fno-finite-math-only -funroll-loops

SPEC CINT2006 Result

Copyright 2006-2026 Standard Performance Evaluation Corporation

Microsoft Corporation

(Test Sponsor: Kenji Mouri)

Azure Standard D64as v7

SPECint_rate2006 = 1880

SPECint_rate_base2006 = 1670

CPU2006 license: 3939

Test sponsor: Kenji Mouri

Tested by: Misaki

Test date: Feb-2026

Hardware Availability: Feb-2026

Software Availability: Jan-2026

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Feb 18 16:34:56 2026 by SPEC CPU2006 PS/PDF formatter v6401.