
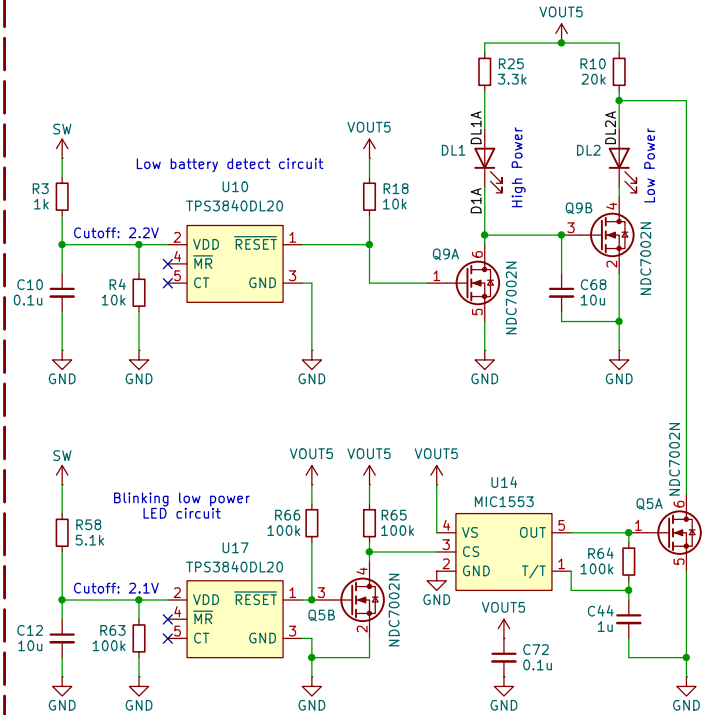


TRIGGER (0 to 1)	SIGNAL/POWER ON
SW	EN
EN	VOUT3, PG3V3
PG3V3	VDD2, PG2V5
PG2V5	VDD3, VOUT5, RESET, VAUD
RESET	VCNT5
VCNT5	VDD5

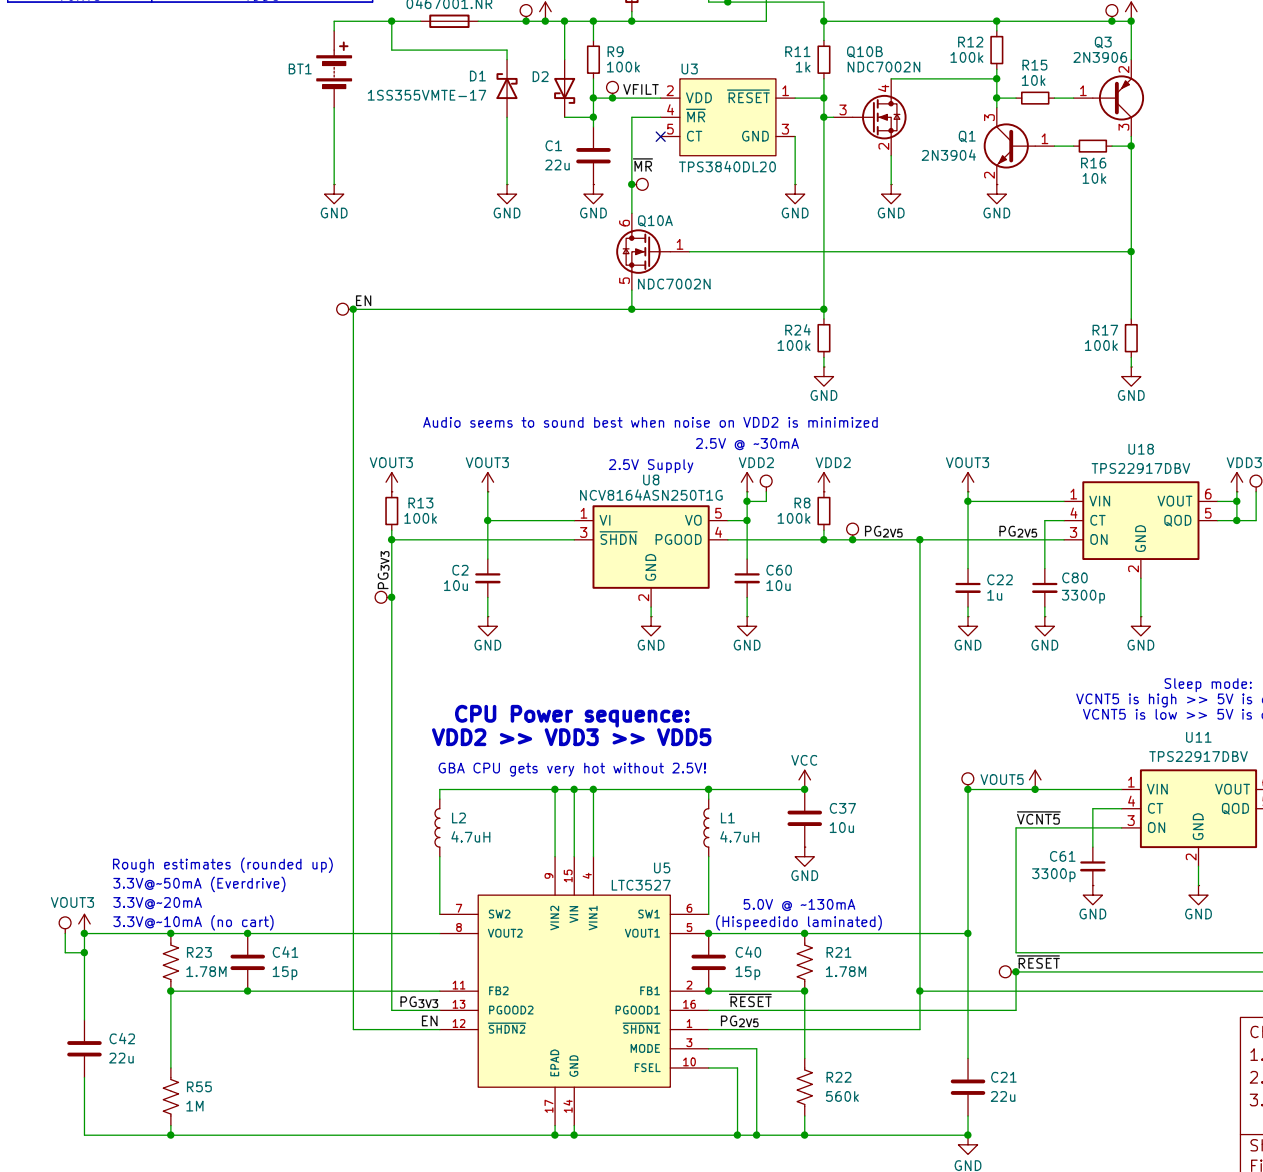

- Changes:
1. U8 input voltage changed to VOUT3, remove GND2
 2. Change audio supply to 2.5V LDO
 3. Add buffer referenced to VAUD for audio signals

Sheet: /
File: AGBM_AA_1-1.kicad_sch

Title: Game Boy Enhance (AGBM-01)


Size: A4 Date: 2026-01-26

KiCad E.D.A. 9.0.6


Rev: 1.0

Id: 1/4


Link Port

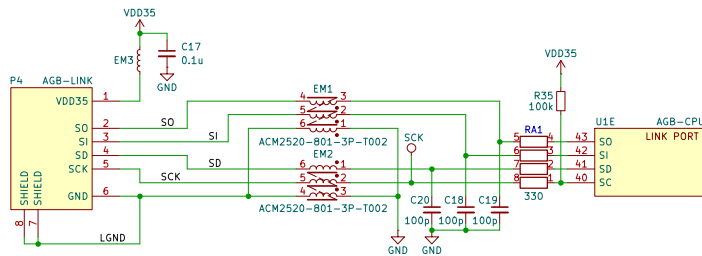


Cartridge Connector

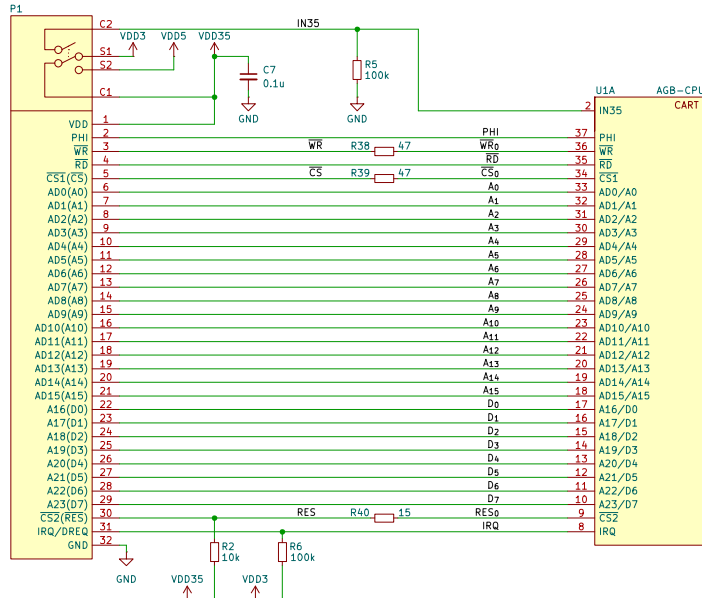


CPU Clock, Power, etc.

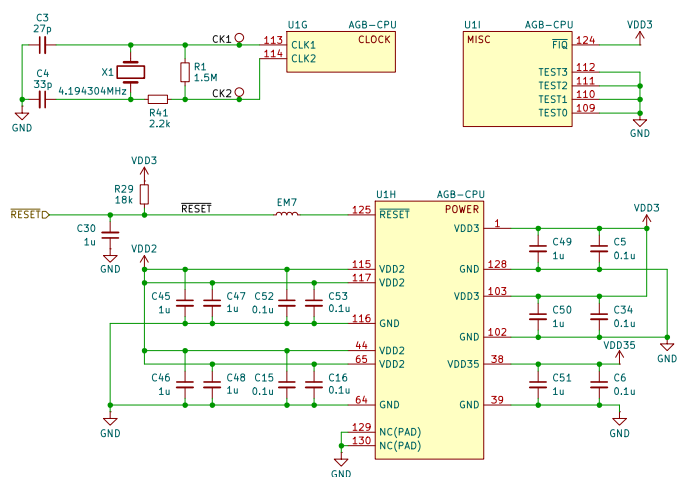




Audio



Button Inputs, IPS Screen

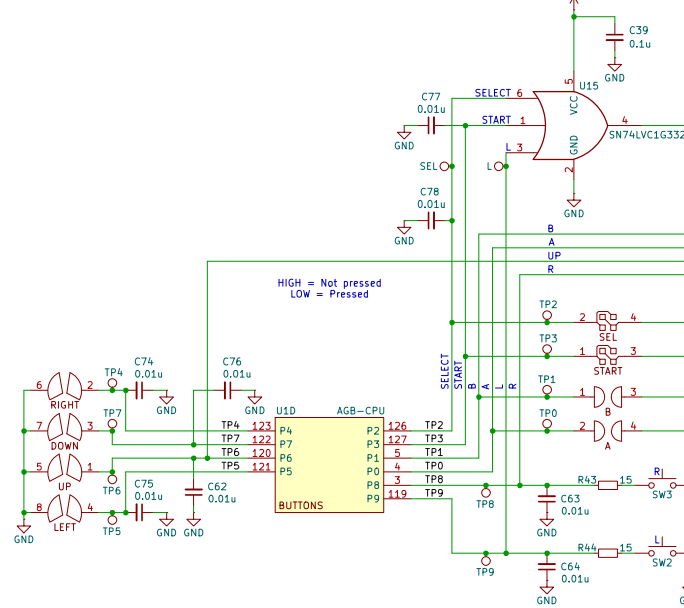

RAM

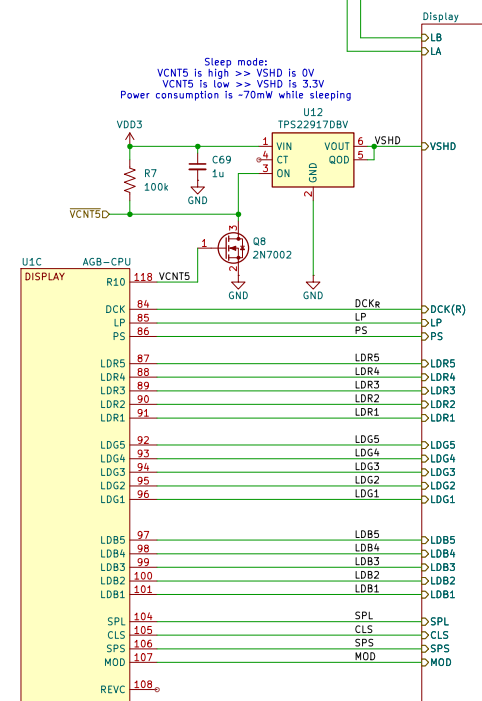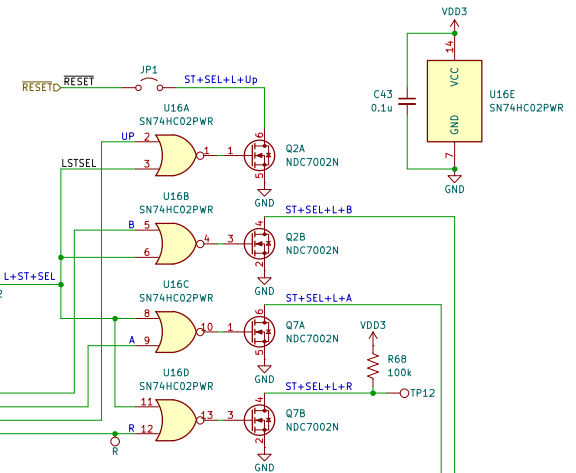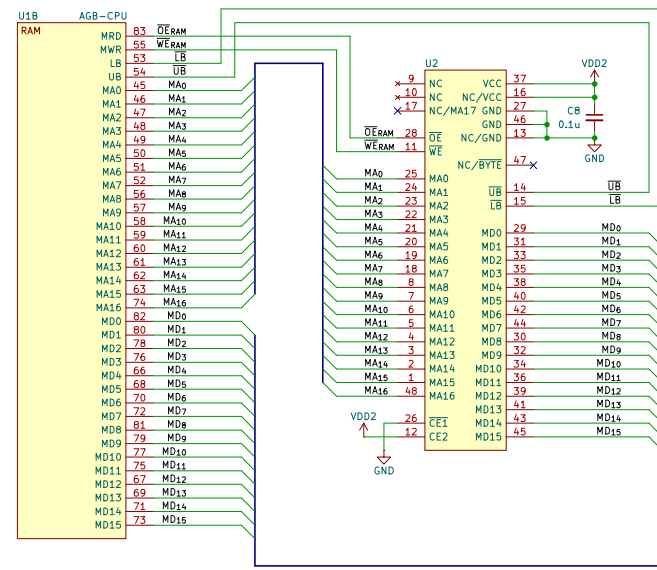



Sheet: /CPU/
File: CPU.kicad_sch

Title: Game Boy Enhance (AGB-01)

Size: A3 Date: 2026-01-26
KiCad E.D.A. 9.0.6

Rev: 1.0
Id: 2/4

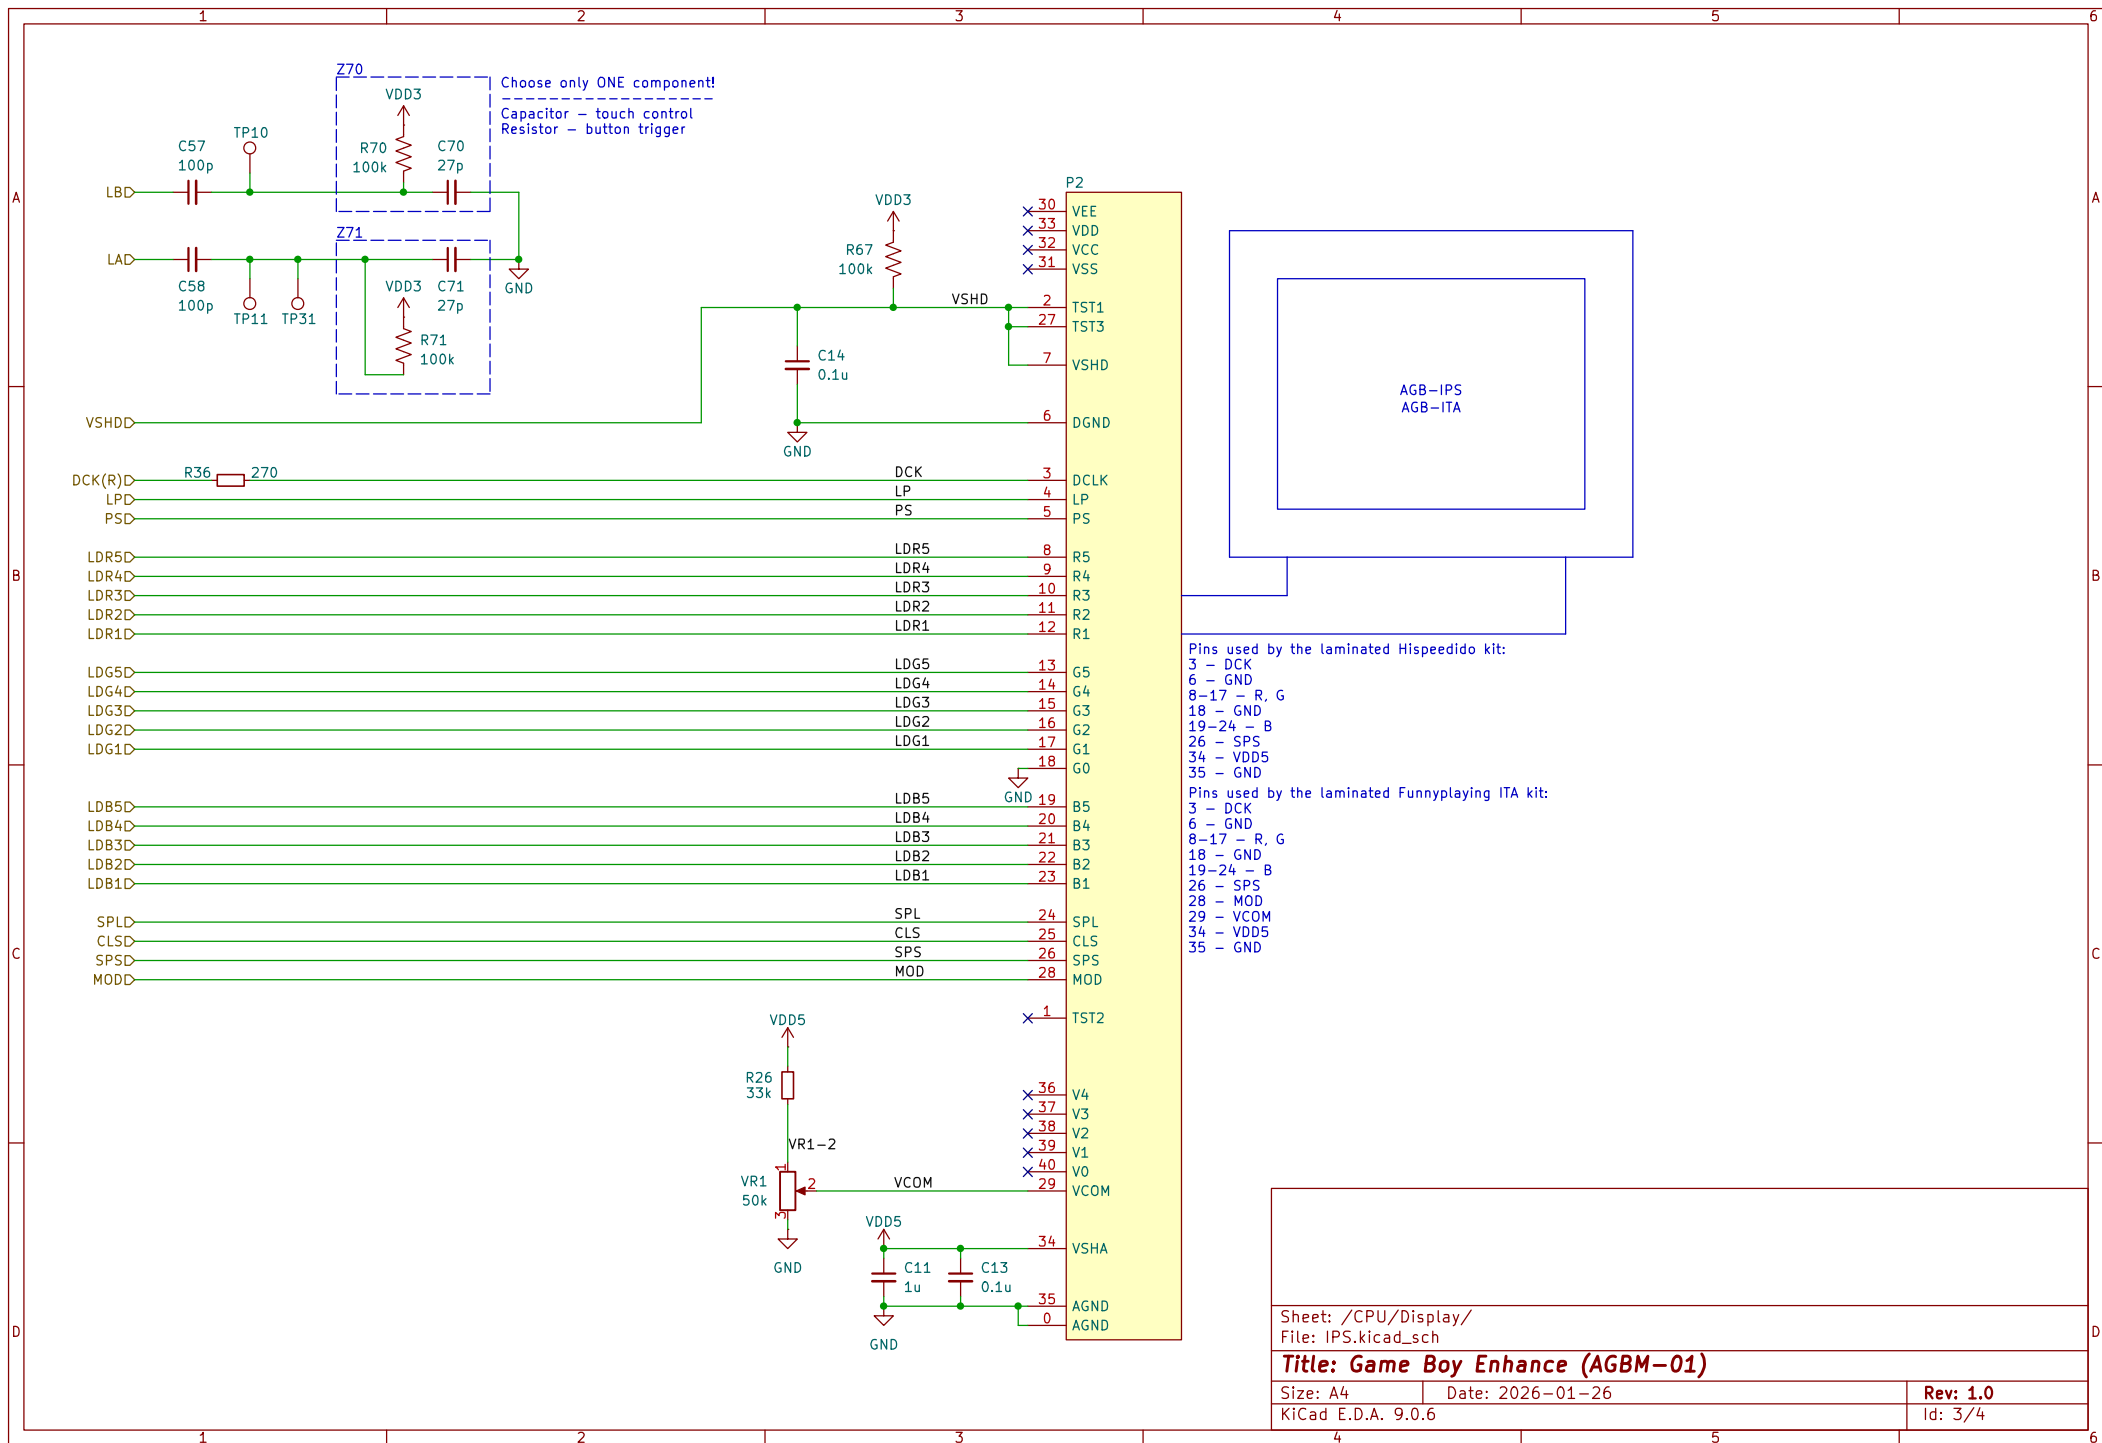

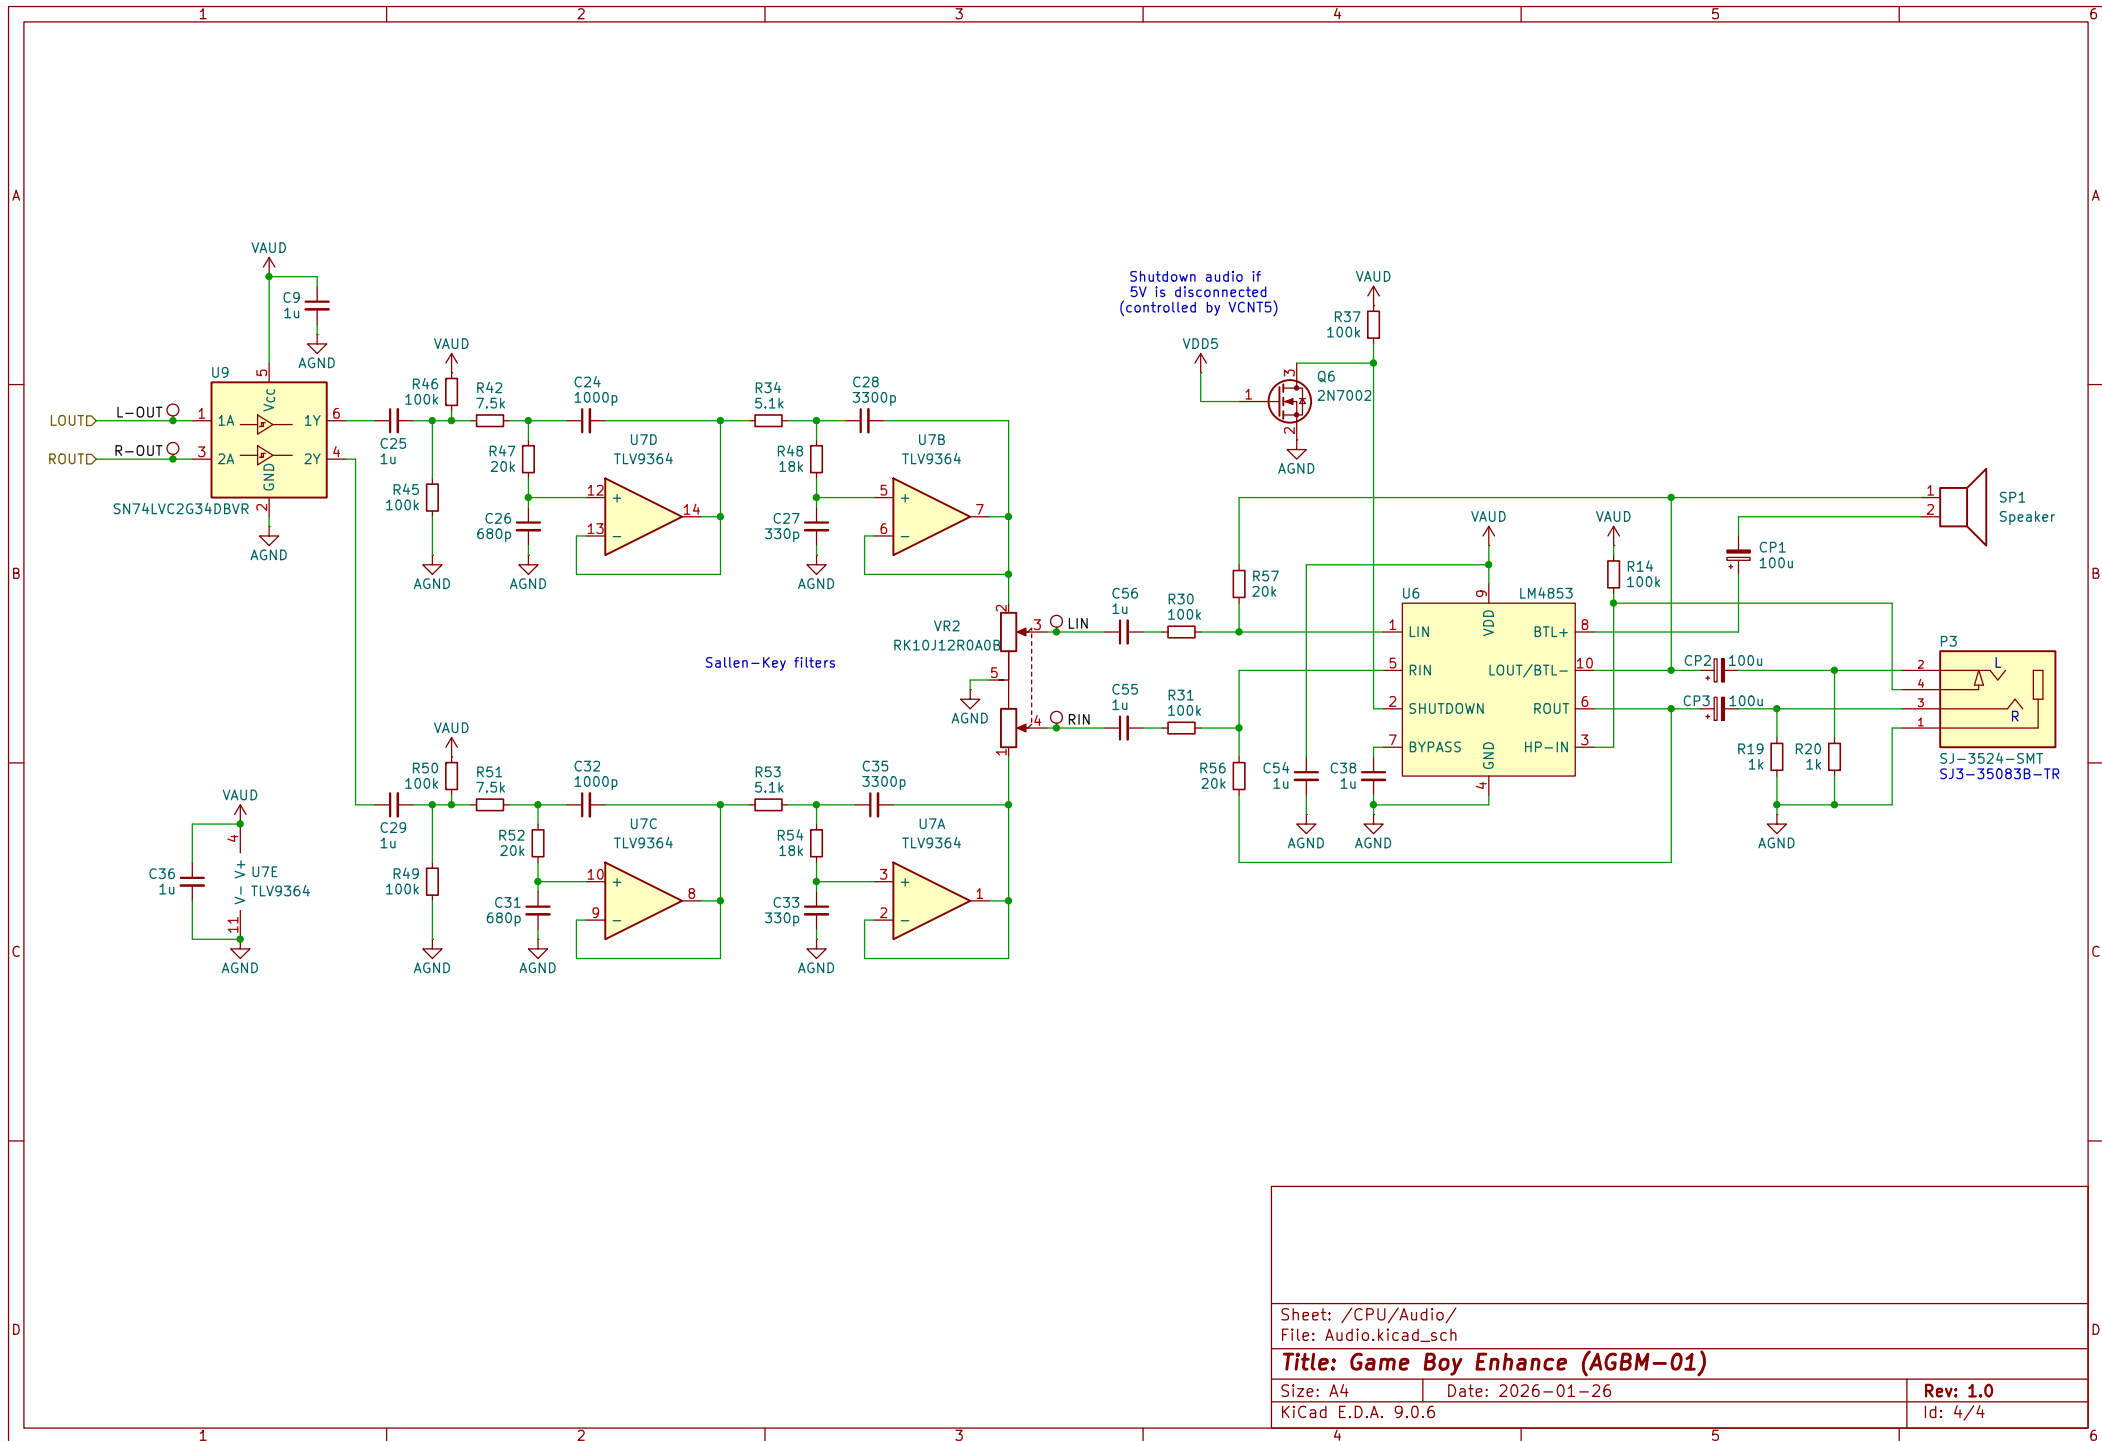

Sheet: /CPU/Audio/
File: Audio.kicad_sch

Title: Game Boy Enhance (AGBM-01)

Size: A4

Date: 2026-01-26

Rev: 1.0

KiCad E.D.A. 9.0.6

Id: 4/4