"High Frequency Ceramic Solutions"

2450 MHz Antenna

P/N 2450AT18B100

Detail Specification: 08/10/09


Page 1 of 3

General Specifications

Part Number	2450AT18B100	
Frequency Range	2400 - 2500 Mhz	
Peak Gain	0.5 dBi typ. (XZ-V) -0.5 dBi typ. (XZ-V)	
Average Gain		
Return Loss	9.5 dB min.	

Input Power	3W max.	
Impedance	50 Ω	
Operating Temperature	-40 to +85°C	
Reel Quanity	3,000	

	Packaging Style	Bulk	Suffix = S	Eg. 2450AT18B100S
P/N		T&R	Suffix = E	Eg. 2450AT18B100E
Suffix	Termination Style	100% Tin	Suffix = None	Eg. 2450AT18B100(E or S)
		Tin / Lead	Please consult Factory	



Mechanical Dimensions

	modification billionologic					
	In	mm	†			
L	0.126 ± 0.008	3.20 ± 0.20	w			
W	0.063 ± 0.008	1.60 ± 0.20	* a			
Т	0.051 +.004/008	1.30 +0.1/-0.2				
а	0.020 ± 0.012	0.50 ± 0.30	└			

Mounting Considerations

Mount these devices with brown mark facing up. Units: mm
Line width should be designed to provide 50 Ω impedance matching characteristics.

a) Without Matching Circuits

b) With Matching Circuits

2.6

4.2

JTI P/N for Matching Circuit:
Cap (1.2pF): 500R07S1R2BV4T
Inductor (2.7nH): L-07C2N7SV6T

Johanson Technology, Inc. reserves the right to make design changes without notice. All sales are subject to Johanson Technology, Inc. terms and conditions.



Inductor (3.3nH): L-07C3N3SV6T


"High Frequency Ceramic Solutions"

2450 MHz Antenna

P/N 2450AT18B100

Detail Specification: 08/10/09 Page 2 of 3

Typical Electrical Characteristics (T=25°C)

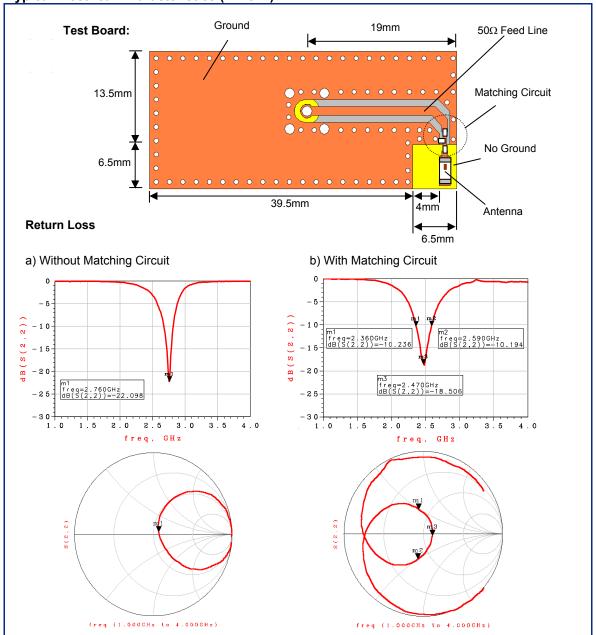

Johanson Technology, Inc. reserves the right to make design changes without notice. All sales are subject to Johanson Technology, Inc. terms and conditions.




"High Frequency Ceramic Solutions"

2450 MHz Antenna

P/N 2450AT18B100

Page 3 of 3

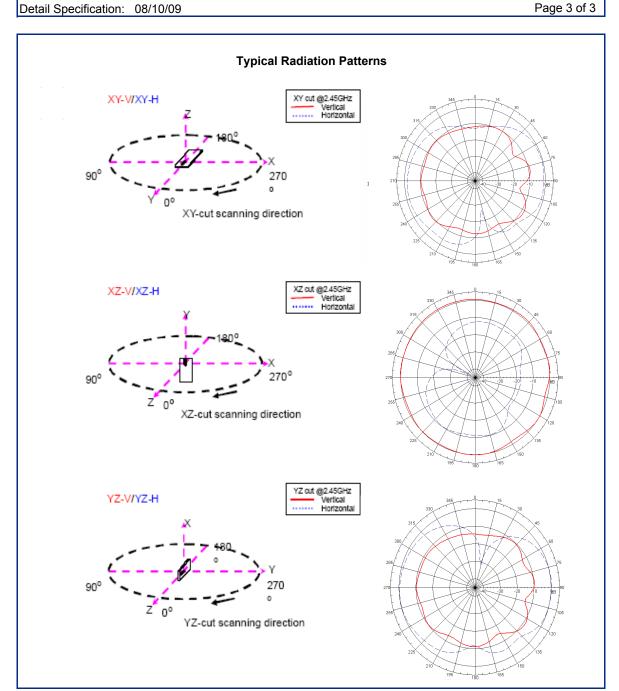

Johanson Technology, Inc. reserves the right to make design changes without notice. All sales are subject to Johanson Technology, Inc. terms and conditions.

