

2.45 GHz Balun / Matching Network : Optimized for Nordic's Chipset nRF24L01/+ P/N 2450BM14A0002

Detail Specification: 03/31/09

Page 1 of 2

General Specifications


Part Number	2450BM14A0002
Frequency (MHz)	2400 - 2500
Unbalanced Impedance	50 Ω
Differential Balanced Impedance	Conjugate match to Nordic nRF24L01/nRF24L01+
Attenuation: Differential Mode	15 min.@4800~5000MHz 15 min.@7200~7500MHz
Attenuation: Common Mode	20 min.@4800~5000MHz

Insertion Loss	2.0 dB max.
Return Loss	9.5 dB min.
Phase Difference	160° \pm 15°
Amplitude Difference	3.5 \pm 1.5 dB
Reel Quantity	4,000
Operating Temperature	-40 to +85°C
Storage Temperature	+5 to +35°C, Humidity: 45-75%RH, 12 mos. Max


P/N Suffix	Packaging Style	Bulk	Suffix = S	Eg. 2450BM14A0002S
		T & R	Suffix = E	Eg. 2450BM14A0002E
	Termination Style	100% Tin	Suffix = None	Eg. 2450BM14A0002(E or S)
		Tin / Lead	Please consult Factory	

Terminal Configuration

No.	Function
1	Unbalanced Port
2	GND
3	Balanced Port
4	Balanced Port
5	DC Feed+RF GND or GND
6	GND



Mechanical Dimensions

	In	mm
L	0.063 \pm 0.004	1.60 \pm 0.10
W	0.031 \pm 0.004	0.80 \pm 0.10
T	0.024 \pm 0.004	0.60 \pm 0.10
a	0.008 \pm 0.004	0.20 \pm 0.10
b	0.008 \pm 0.004/-0.006	0.20 \pm 0.1/-0.15
c	0.006 \pm 0.004	0.15 \pm 0.10
g	0.012 \pm 0.004	0.30 \pm 0.10
p	0.020 \pm 0.002	0.50 \pm 0.05

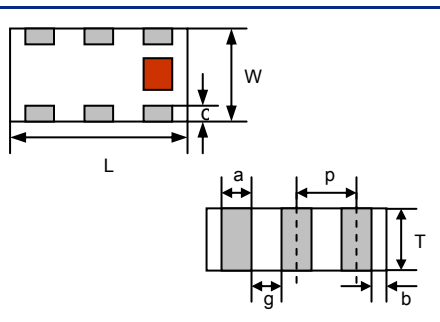
Mounting Considerations

Mount these devices with maroon mark facing up.

* Line width should be designed to provide 50 Ω impedance matching characteristics.

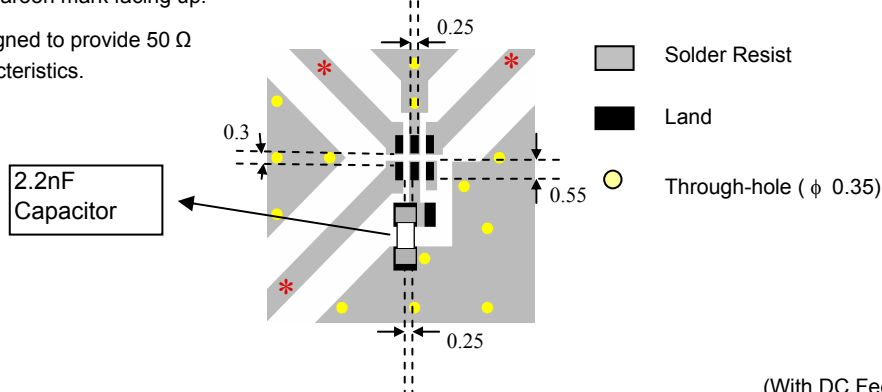

Units: mm

(With DC Feed)

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

Preliminary


High Frequency Ceramic Solutions

2.45 GHz Balun / Matching Network : Optimized for Nordic's Chipset nRF24L01/+ P/N 2450BM14A0002

Detail Specification: 03/31/09

Page 2 of 2

Typical Electrical Performance (T=25°C)

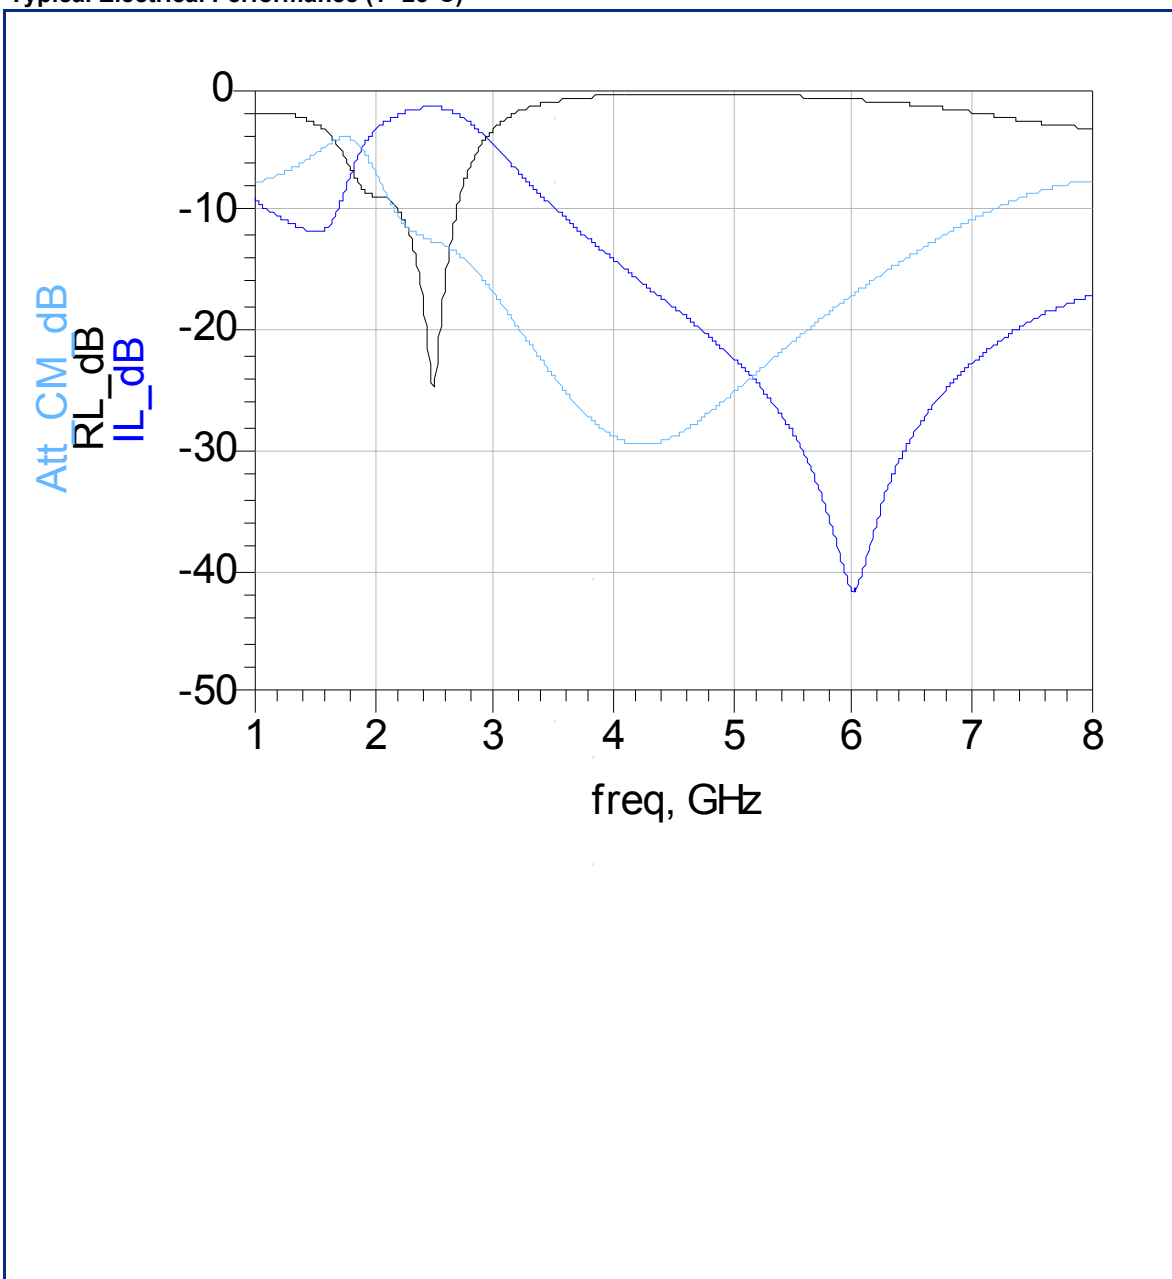

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2009 Johanson Technology, Inc. All Rights Reserved