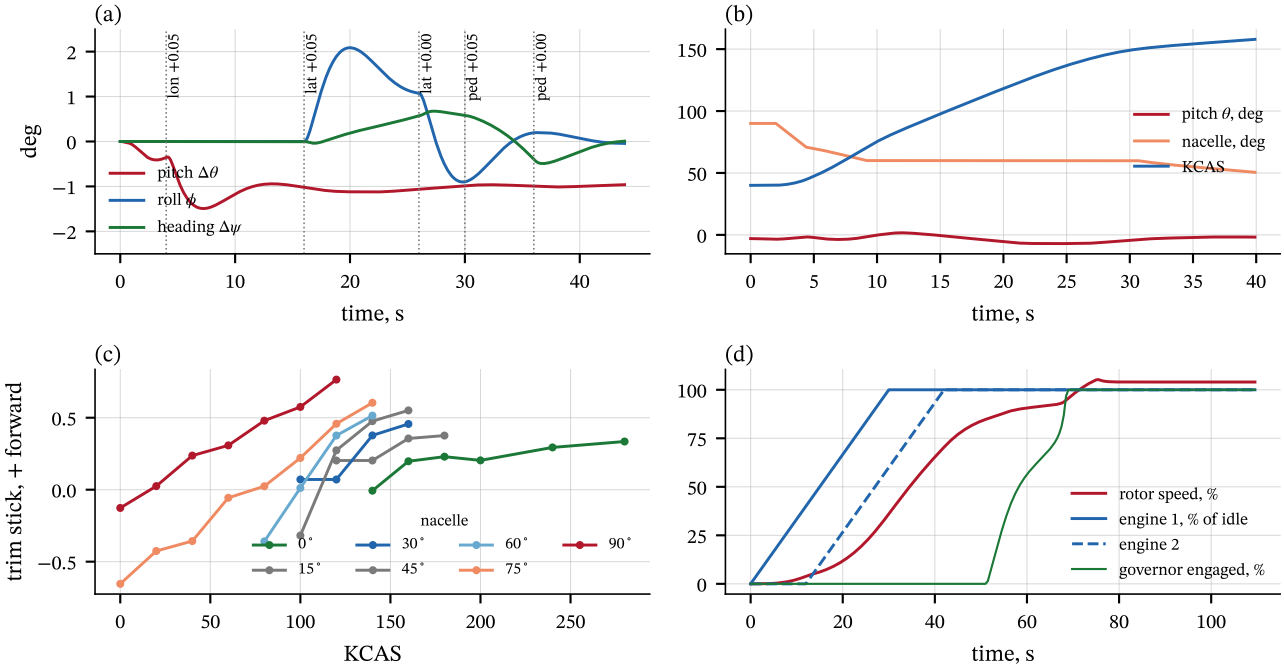
(a)
lon +0.05
lat +0.05
lat +0.00
ped +0.05
ped +0.00
deg
pitch Δθ
roll φ
heading Δψ
time, s
(b)
pitch θ, deg
nacelle, deg
KCAS
time, s
(c)
trim stick, + forward
nacelle
0˚
15˚
30˚
45˚
60˚
75˚
90˚
KCAS
(d)
rotor speed, %
engine 1, % of idle
engine 2
governor engaged, %
time, s