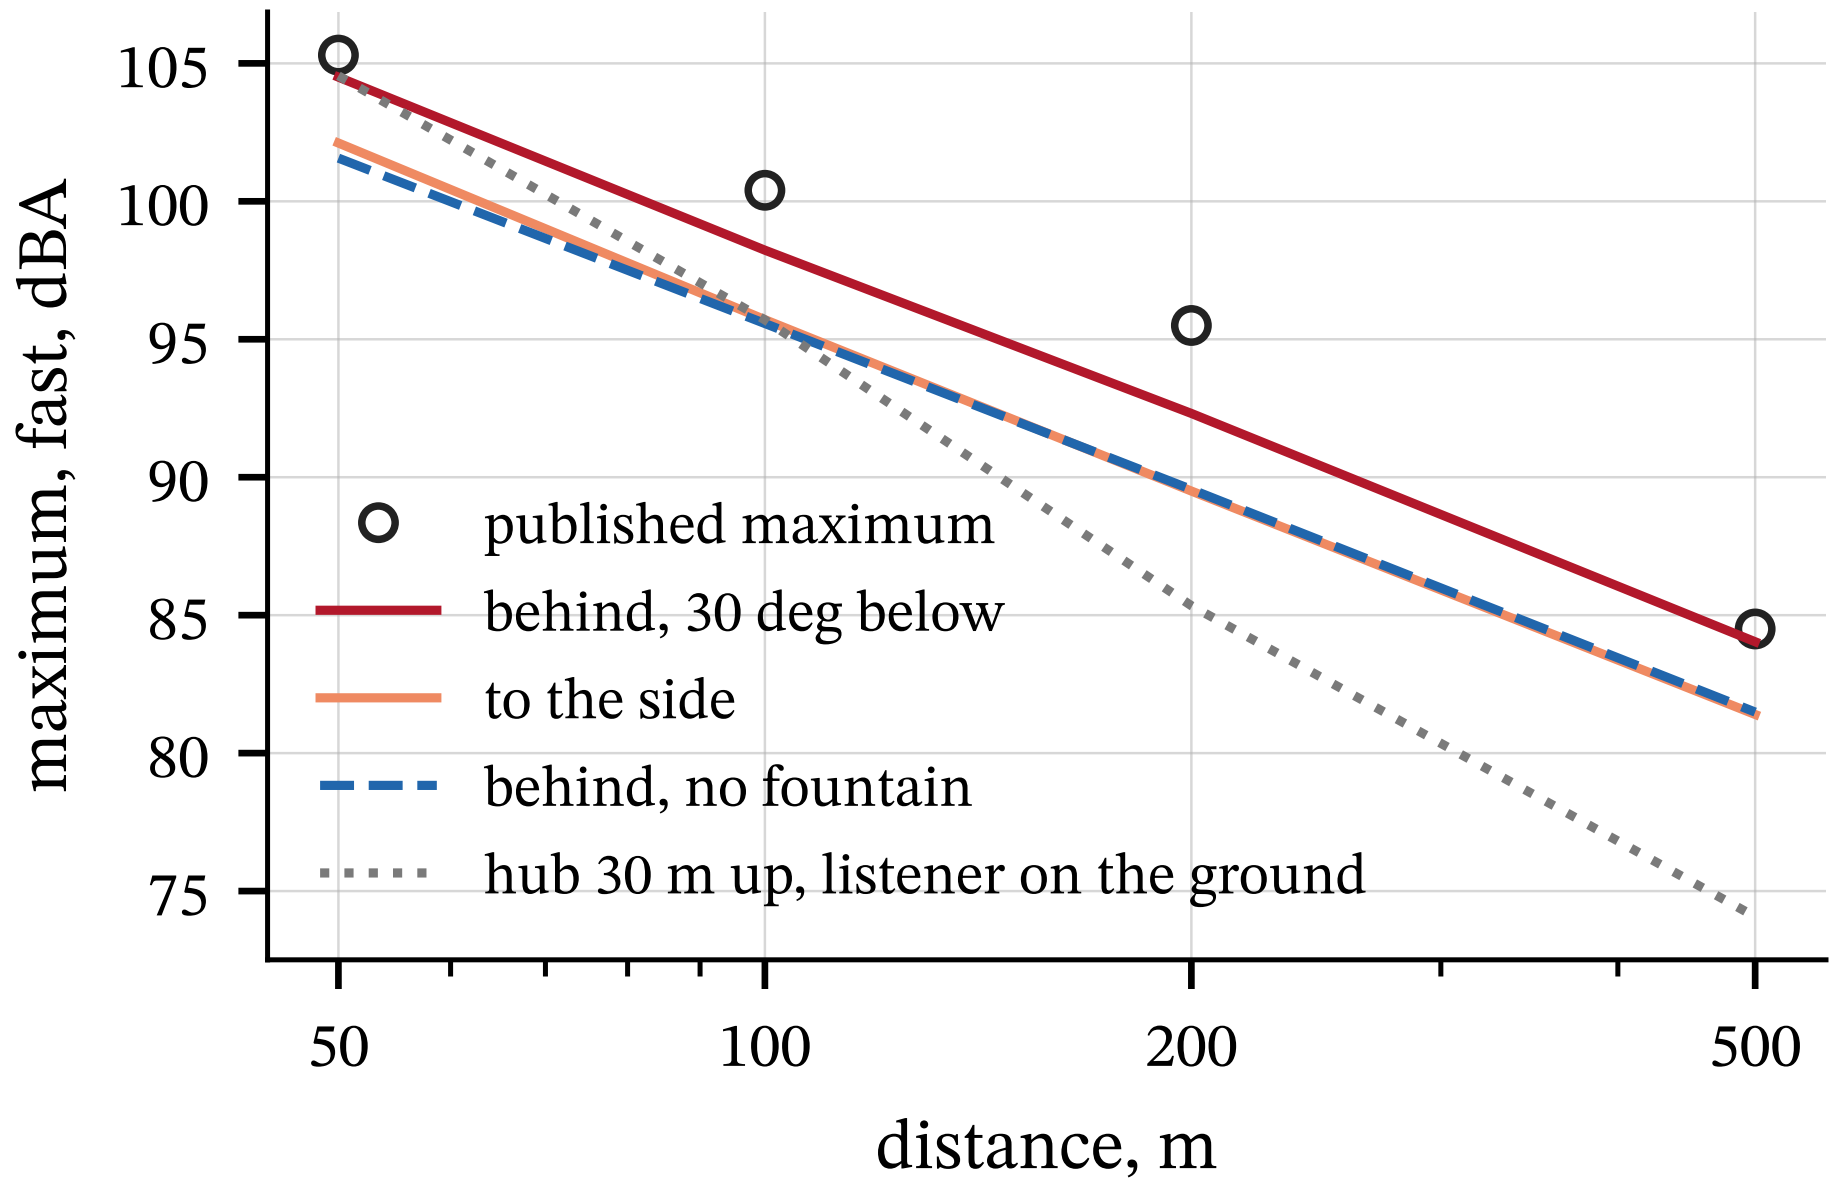
maximum, fast, dBA
105
100
95
90
85
80
75
50
100
200
500
distance, m
published maximum
behind, 30 deg below
to the side
behind, no fountain
hub 30 m up, listener on the ground