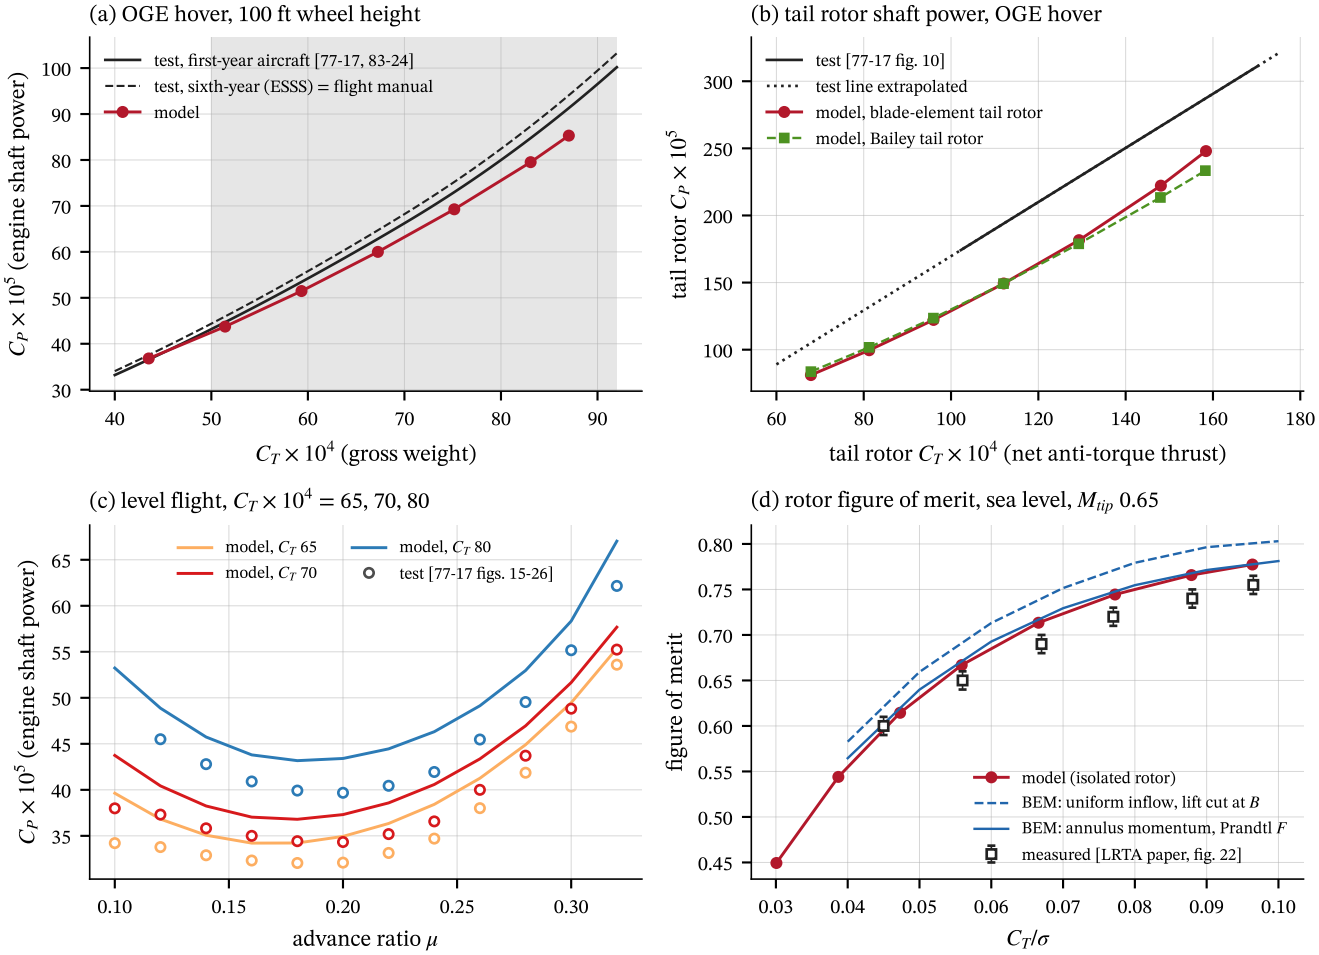
(a) OGE hover, 100 ft wheel height
test, first-year aircraft [77-17, 83-24]
test, sixth-year (ESSS) = flight manual
model
$C_P \times 10^5$ (engine shaft power)
$C_T \times 10^4$ (gross weight)
(b) tail rotor shaft power, OGE hover
test [77-17 fig. 10]
test line extrapolated
model, blade-element tail rotor
model, Bailey tail rotor
tail rotor $C_P \times 10^5$
tail rotor $C_T \times 10^4$ (net anti-torque thrust)
(c) level flight, $C_T \times 10^4 = 65, 70, 80$
model, C_T 65
model, C_T 70
model, C_T 80
test [77-17 figs. 15-26]
$C_P \times 10^5$ (engine shaft power)
advance ratio μ
(d) rotor figure of merit, sea level, M_{tip} 0.65
model (isolated rotor)
BEM: uniform inflow, lift cut at B
BEM: annulus momentum, Prandtl F
measured [LRTA paper, fig. 22]
figure of merit
C_T/σ