


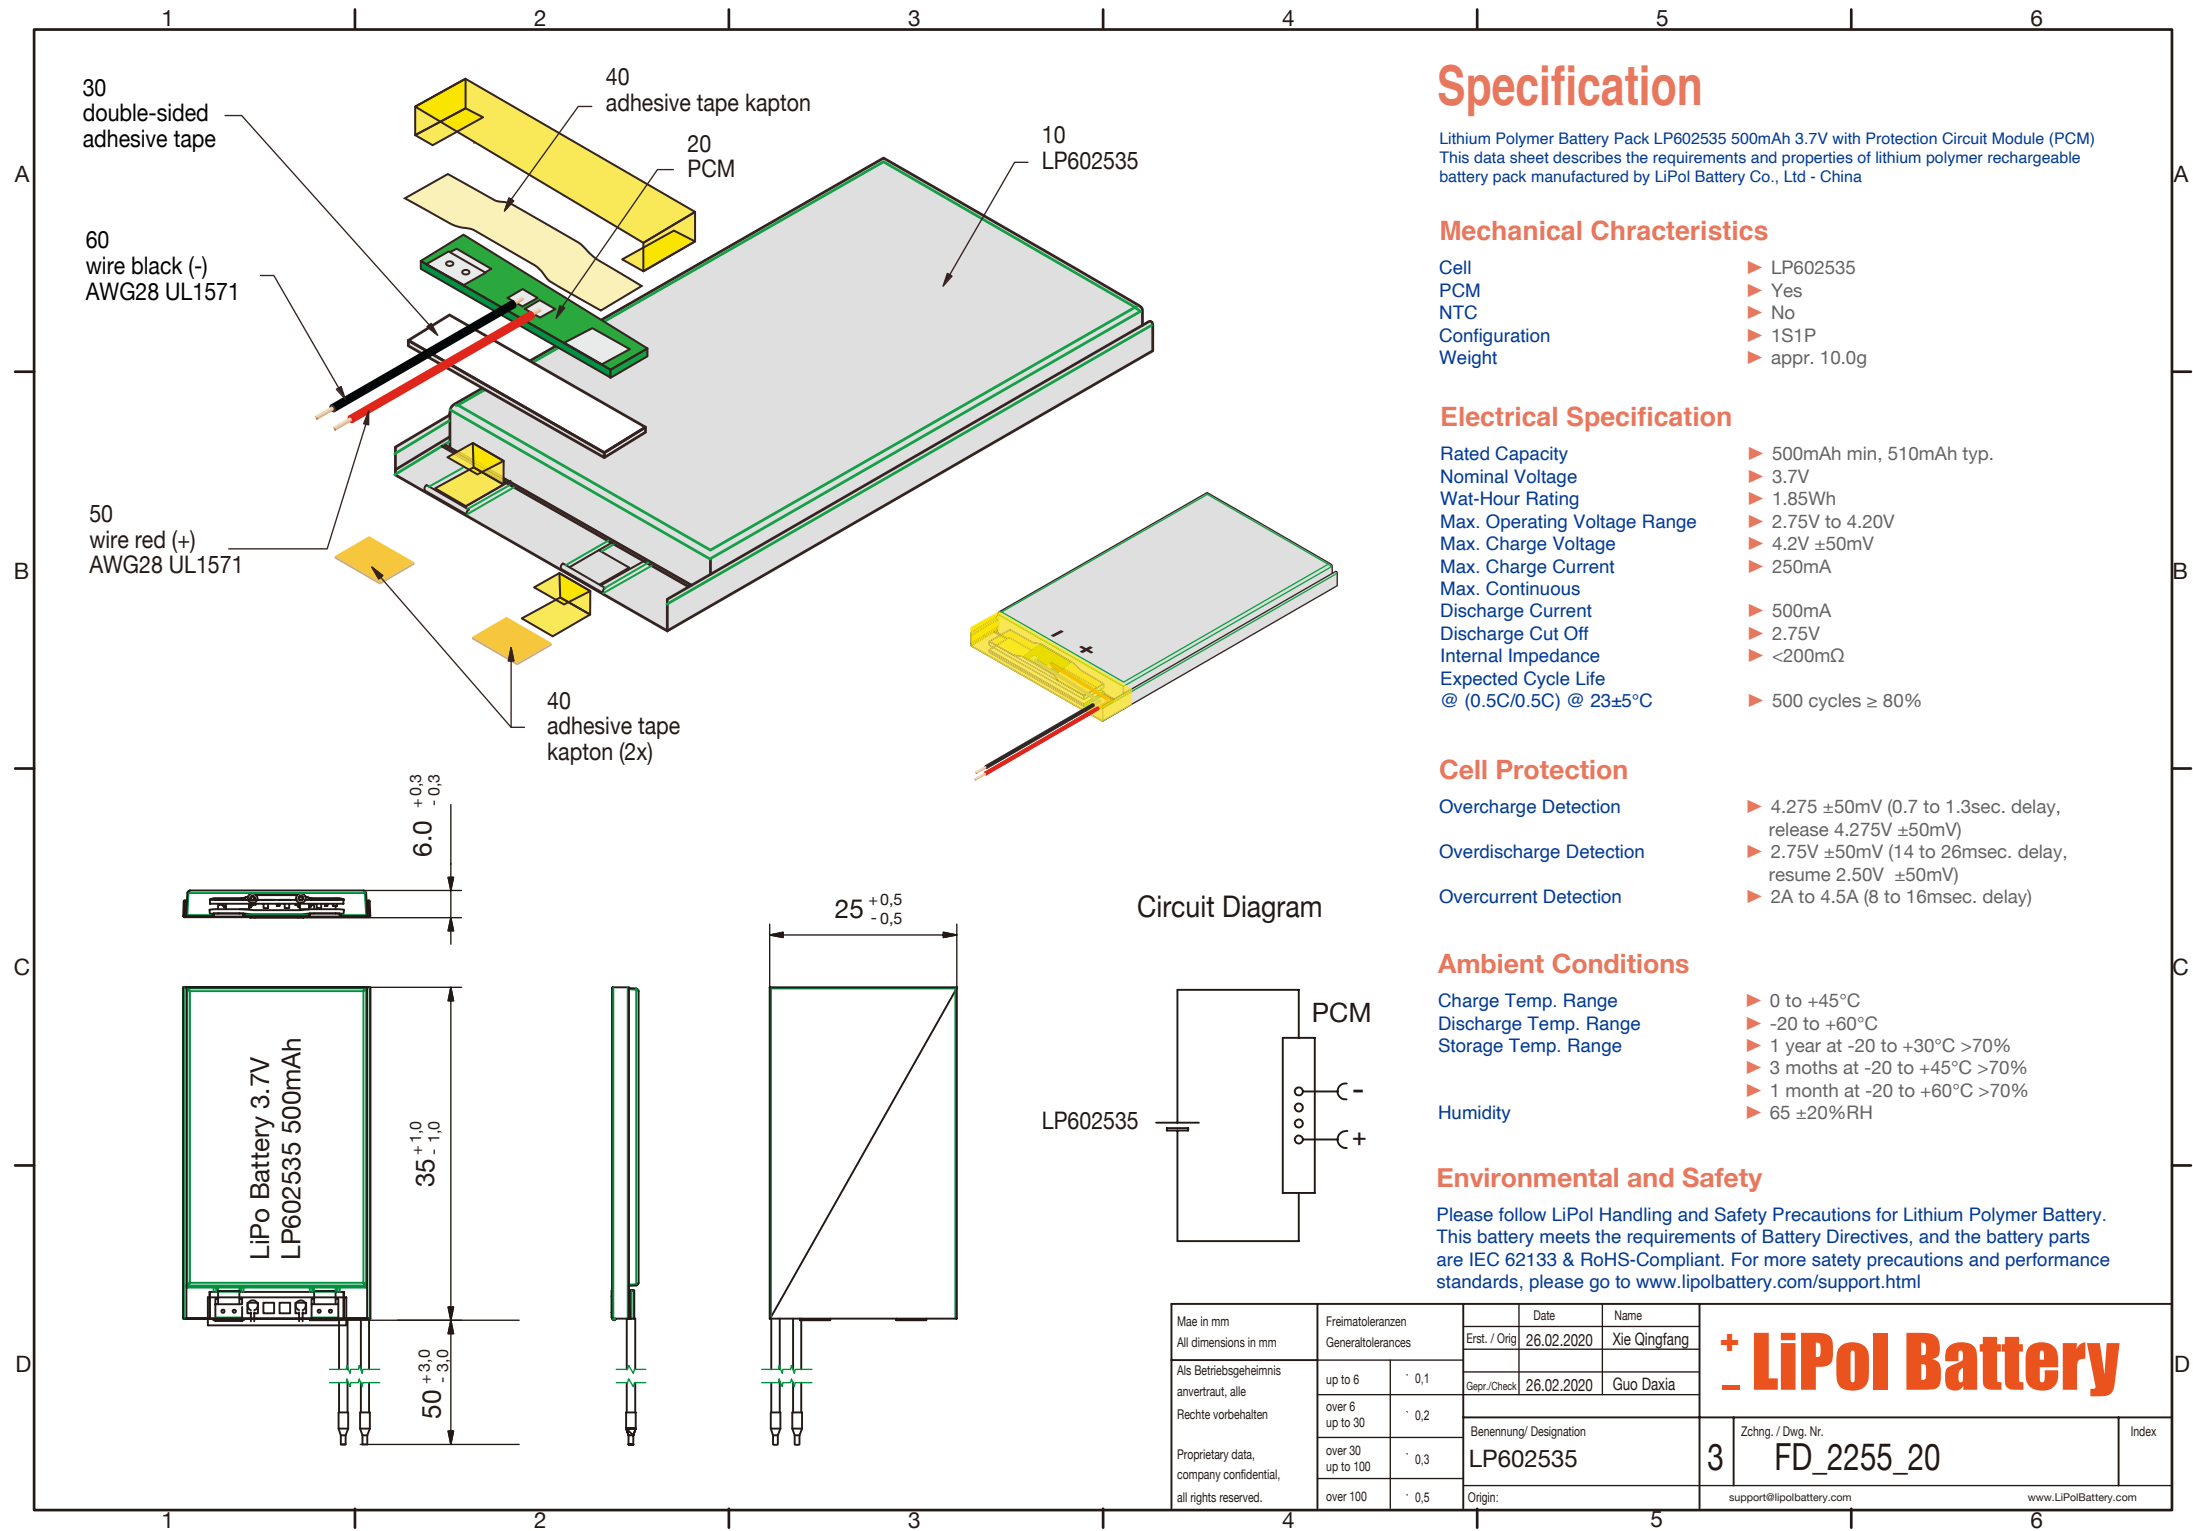

Specification

Lithium Polymer Battery Pack LP602535 500mAh 3.7V with Protection Circuit Module (PCM)
This data sheet describes the requirements and properties of lithium polymer rechargeable battery pack manufactured by LiPol Battery Co., Ltd - China

Mechanical Chracteristics

- Cell ▶ LP602535
- PCM ▶ Yes
- NTC ▶ No
- Configuration ▶ 1S1P
- Weight ▶ appr. 10.0g

Electrical Specification

- Rated Capacity ▶ 500mAh min, 510mAh typ.
- Nominal Voltage ▶ 3.7V
- Wat-Hour Rating ▶ 1.85Wh
- Max. Operating Voltage Range ▶ 2.75V to 4.20V
- Max. Charge Voltage ▶ 4.2V ±50mV
- Max. Charge Current ▶ 250mA
- Max. Continuous Discharge Current ▶ 500mA
- Discharge Cut Off ▶ 2.75V
- Internal Impedance ▶ <200mΩ
- Expected Cycle Life @ (0.5C/0.5C) @ 23±5°C ▶ 500 cycles ≥ 80%

Cell Protection

- Overcharge Detection ▶ 4.275 ±50mV (0.7 to 1.3sec. delay, release 4.275V ±50mV)
- Overdischarge Detection ▶ 2.75V ±50mV (14 to 26msec. delay, resume 2.50V ±50mV)
- Overcurrent Detection ▶ 2A to 4.5A (8 to 16msec. delay)


Ambient Conditions

- Charge Temp. Range ▶ 0 to +45°C
- Discharge Temp. Range ▶ -20 to +60°C
- Storage Temp. Range ▶ 1 year at -20 to +30°C >70%
- ▶ 3 moths at -20 to +45°C >70%
- ▶ 1 month at -20 to +60°C >70%
- Humidity ▶ 65 ±20%RH

Environmental and Safety

Please follow LiPol Handling and Safety Precautions for Lithium Polymer Battery.
This battery meets the requirements of Battery Directives, and the battery parts are IEC 62133 & RoHS-Compliant. For more satety precautions and performance standards, please go to www.lipolbattery.com/support.html

Circuit Diagram



Mae in mm All dimensions in mm	Freimatoleranzen Generaltolerances		Date	Name	LiPol Battery					
			Erst. / Orig	26.02.2020				Xie Qingfang		
Als Betriebsgeheimnis anvertraut, alle Rechte vorbehalten	up to 6	0,1	Gepr./Check	26.02.2020				Guo Daxia		
	over 6 up to 30	0,2	Benennung/ Designation LP602535					3	Zchnng. / Dwg. Nr. FD_2255_20	Index
	over 30 up to 100	0,3								
Proprietary data, company confidential, all rights reserved.	over 100	0,5	Origin:		support@lipolbattery.com		www.LiPolBattery.com			