Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol

- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms

- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet

- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

What is a router?

- Modern routers have varying amounts of input ports and output ports.
- Home-grade, SMB "routers" typically have the following internal components:
  - Switch
  - Router
  - Firewall
  - Wireless Radio
- Advanced devices often have:
  - VPN
  - Port Forwarding
  - QoS (Quality of Service)
  - Separate control over each port

Router (only) architecture overview

two key router functions:

- run routing algorithms/protocol (RIP, OSPF, BGP)
- *forwarding* datagrams from incoming to outgoing link

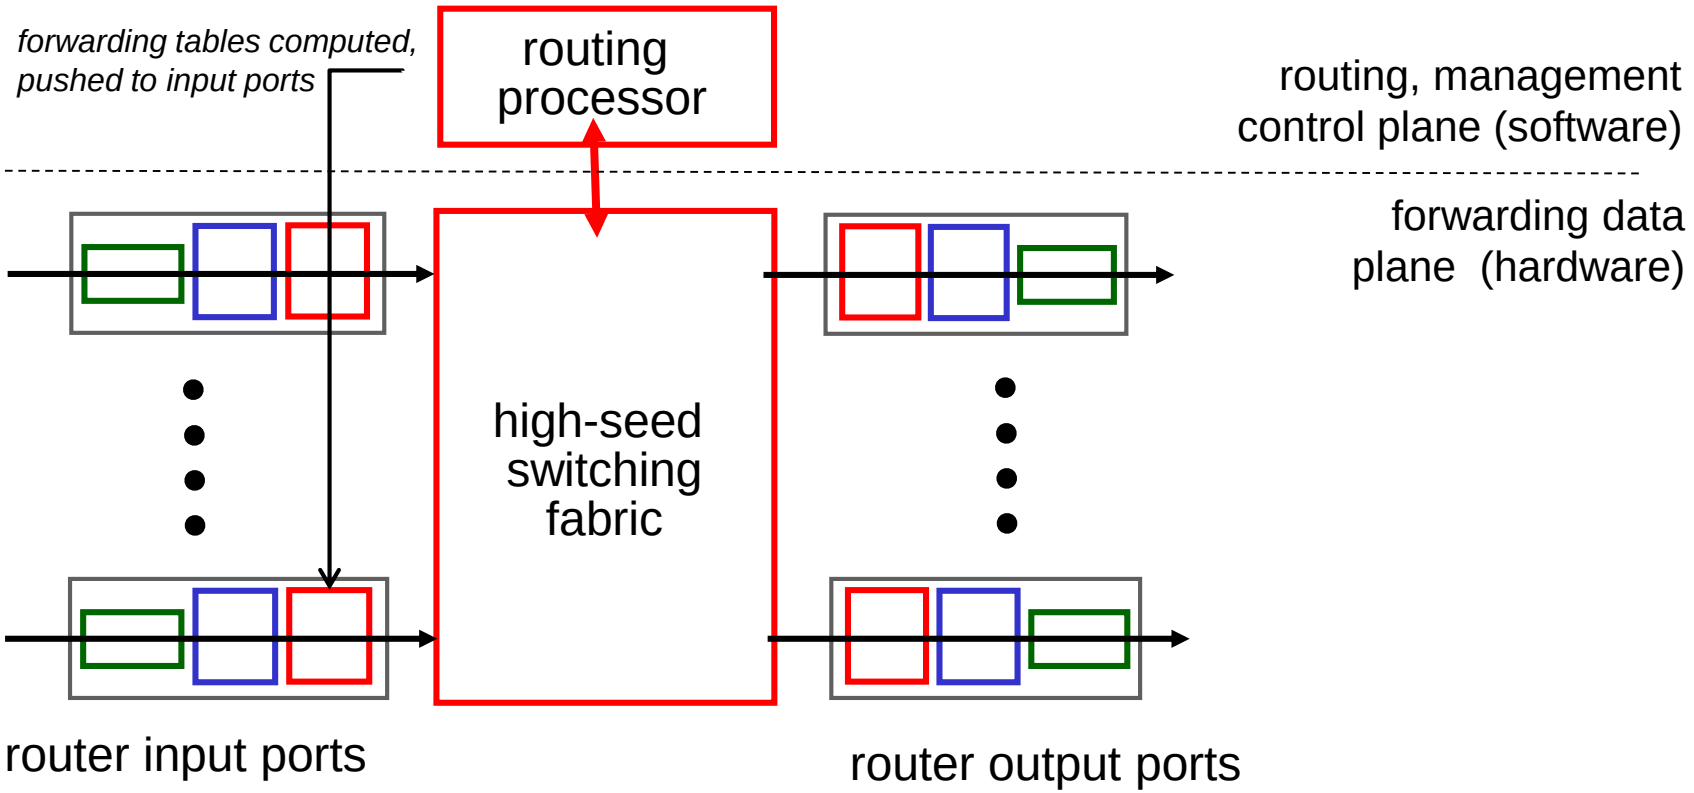

Input port functions

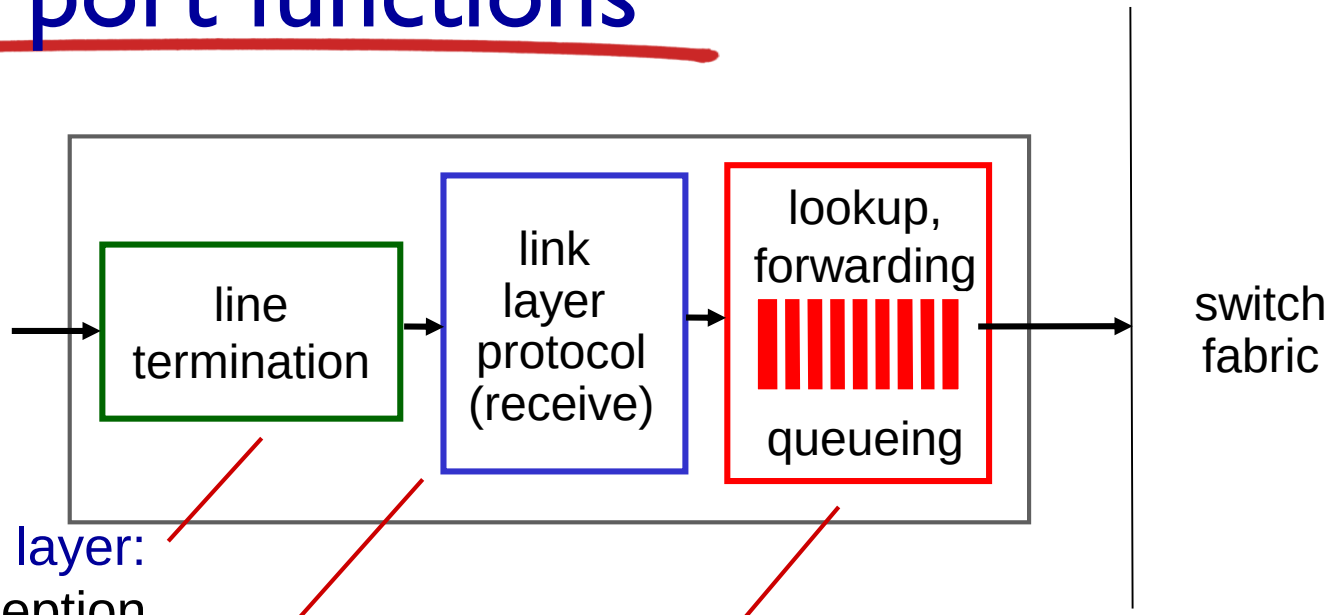

physical layer:
bit-level reception

data link layer:
e.g., Ethernet
see chapter 5

decentralized switching:

- given datagram dest., lookup output port using forwarding table in input port memory *("match plus action")*
- goal: complete input port processing at 'line speed'
- queuing: if datagrams arrive faster than forwarding rate into switch fabric

Switching fabrics

- transfer packet from input buffer to appropriate output buffer
- switching rate: rate at which packets can be transfer from inputs to outputs
  - often measured as multiple of input/output line rate
  - N inputs: switching rate N times line rate desirable
- three types of switching fabrics

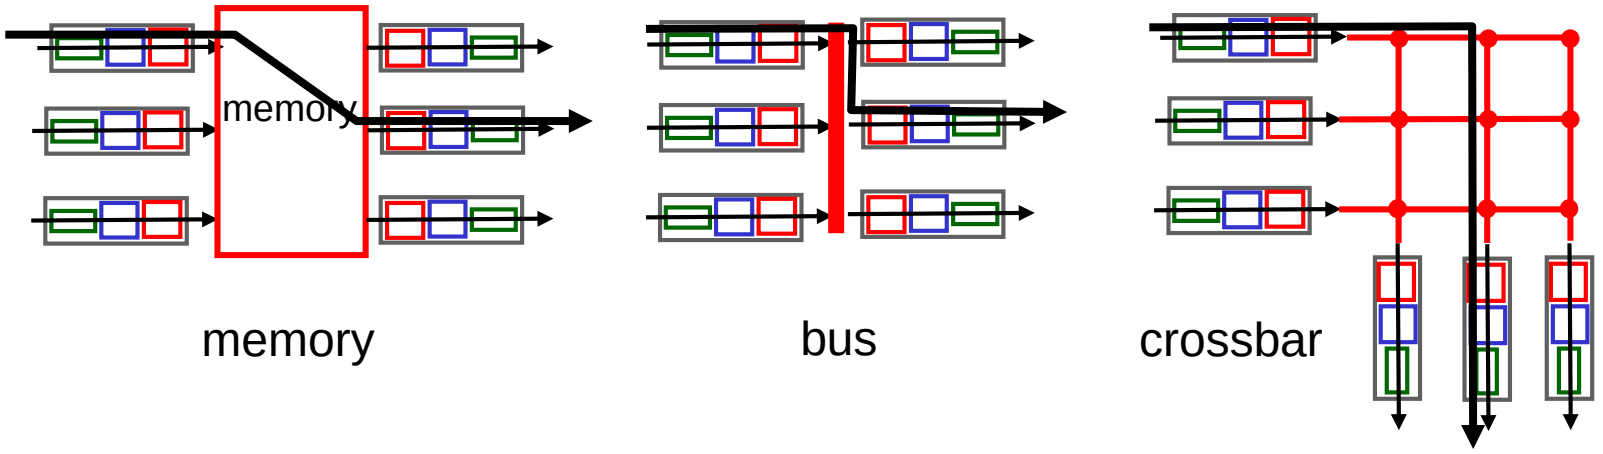

Switching via memory

first generation routers:

- traditional computers with switching under direct control of CPU
- packet copied to **system's** memory
- speed limited by memory bandwidth (2 bus crossings per datagram)

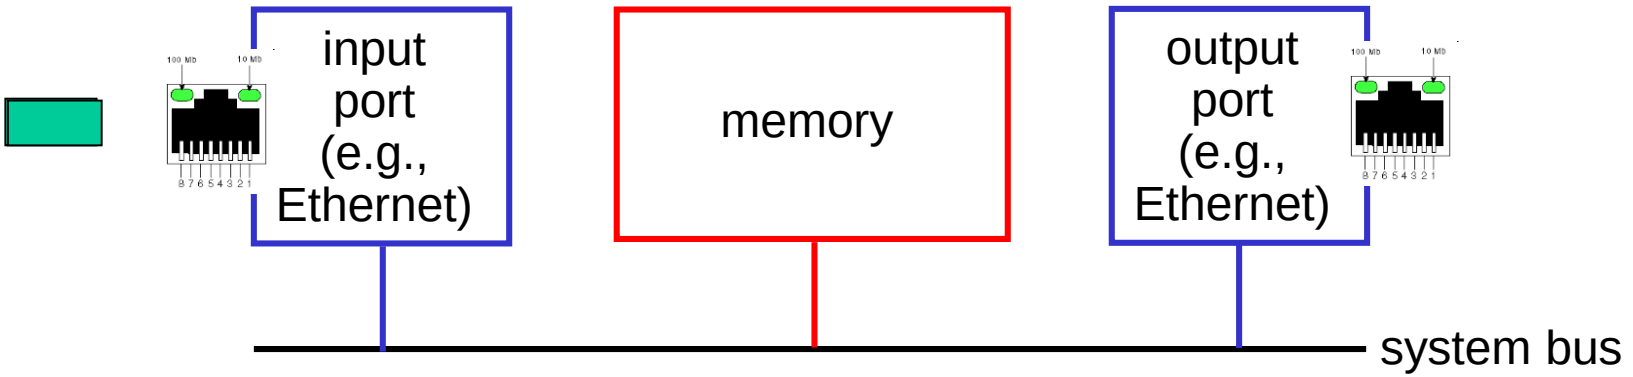

Switching via a bus

- datagram from input port memory copied to output port memory via a shared bus
- *bus contention:* switching speed limited by bus bandwidth
- 32 Gbps bus, Cisco 5600: sufficient speed for access and enterprise routers

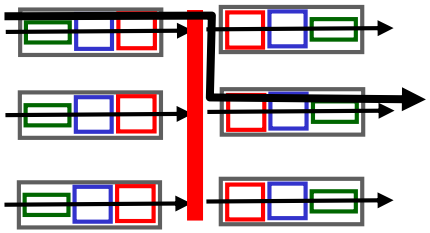

bus

Switching via interconnection network

- overcome bus bandwidth limitations
- banyan networks, crossbar, other interconnection nets initially developed to connect processors in multiprocessor
- advanced design: fragmenting datagram into fixed length cells, switch cells through the fabric.
- Cisco 12000: switches 60 Gbps through the interconnection network

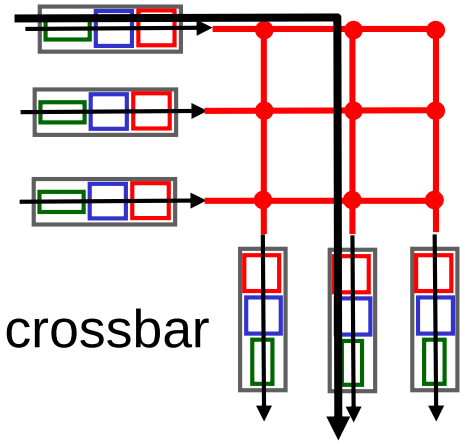

Output ports

This slide is HUGELY important!

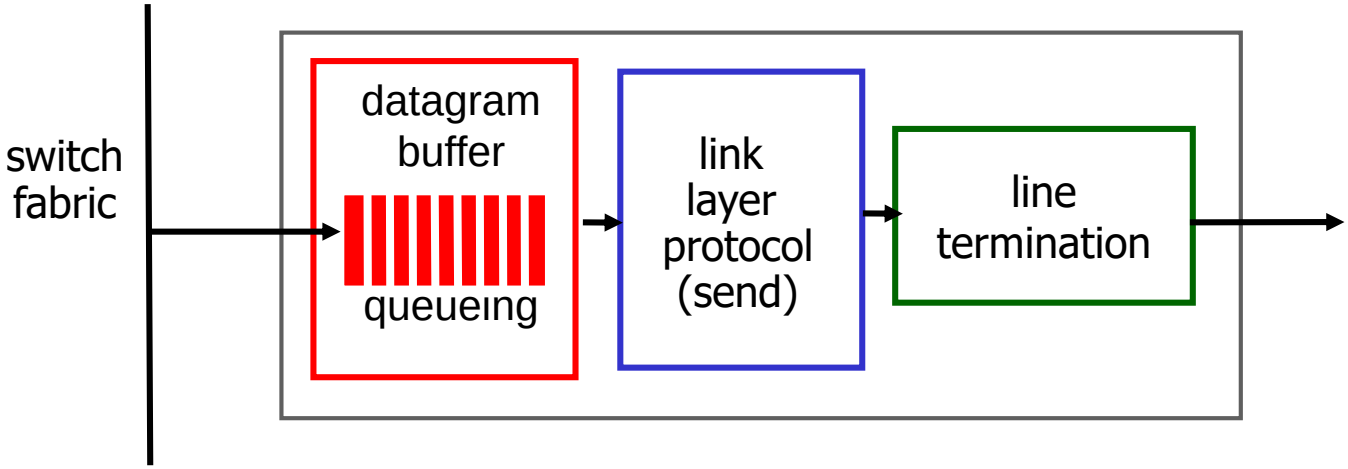

- *buffering* required from fabric faster rate

Datagram (packets) can be lost due to congestion, lack of buffers

- *scheduling* datagrams

Priority scheduling – who gets best performance, network neutrality

Output port queueing

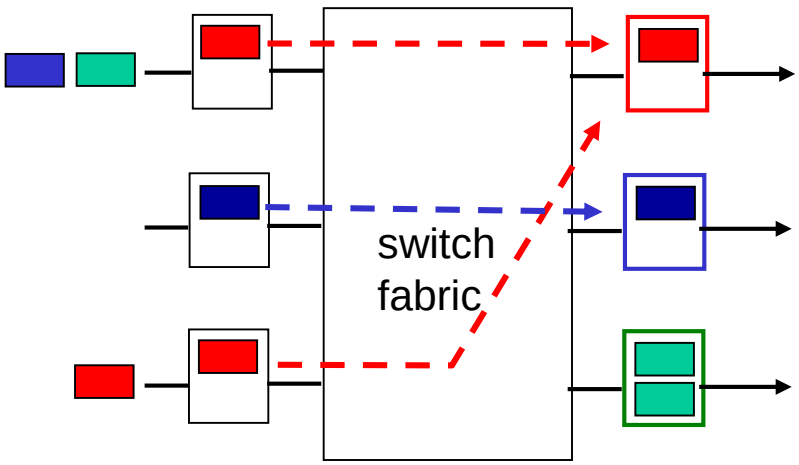

at time *t*, packets move from input to output

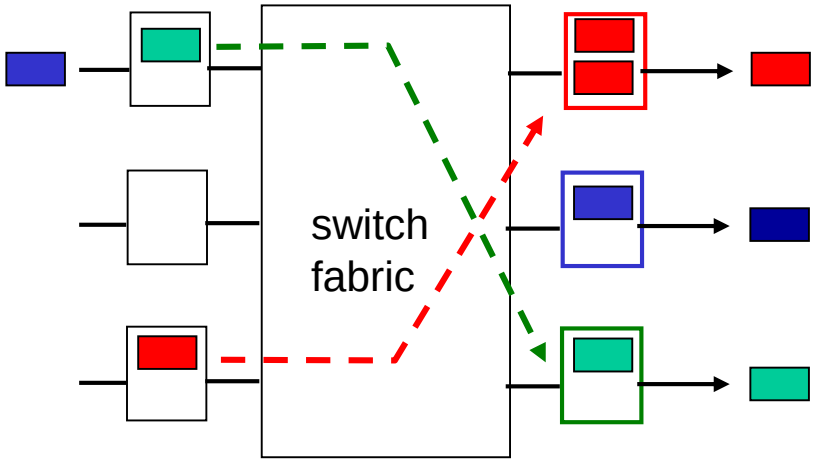

one packet time later

- buffering when arrival rate via switch exceeds output line speed
- *queueing (delay) and loss due to output port buffer overflow!*

How much buffering?

- RFC 3439 rule of thumb: average buffering equal to "typical" RTT (say 250 msec) times link capacity C
  - e.g., 250ms * 10 Gbps => 2.5 Gbit buffer

- recent recommendation: with *N* TCP "flows", buffering equal to $\frac{RTT \cdot C}{\sqrt{N}}$

  thus, with RTT = 0.25s, C = 10 Gbps, and 10 flows:
  - e.g., (0.25s * 10 Gbps) / sqrt(10) => 0.79 Gbit buffer

Input port queuing

- fabric slower than input ports combined -> queueing may occur at input queues,
  - *queueing delay and loss due to input buffer overflow!*
- Head-of-the-Line (HOL) blocking: queued datagram at front of queue prevents others in queue from moving forward

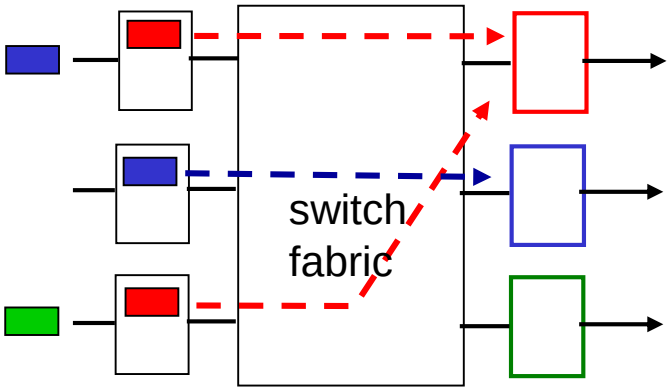

output port contention:
Assume only one **red** datagram can be transferred per time *t*.
lower red packet is blocked

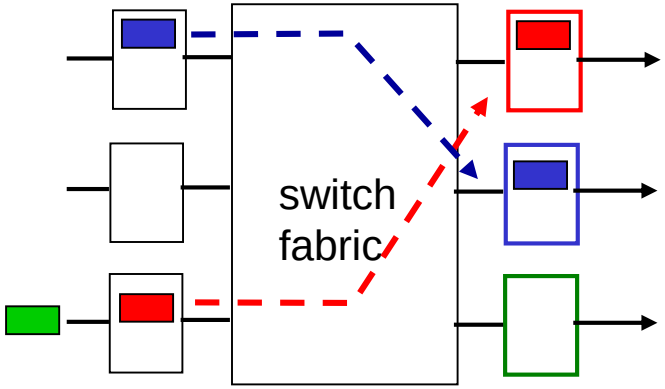

one packet time later: **green** packet experiences HOL blocking - can't be sent, even though it's desired output is not busy!

Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol

- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms

- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet

- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

The Internet network layer

host, router network layer functions:

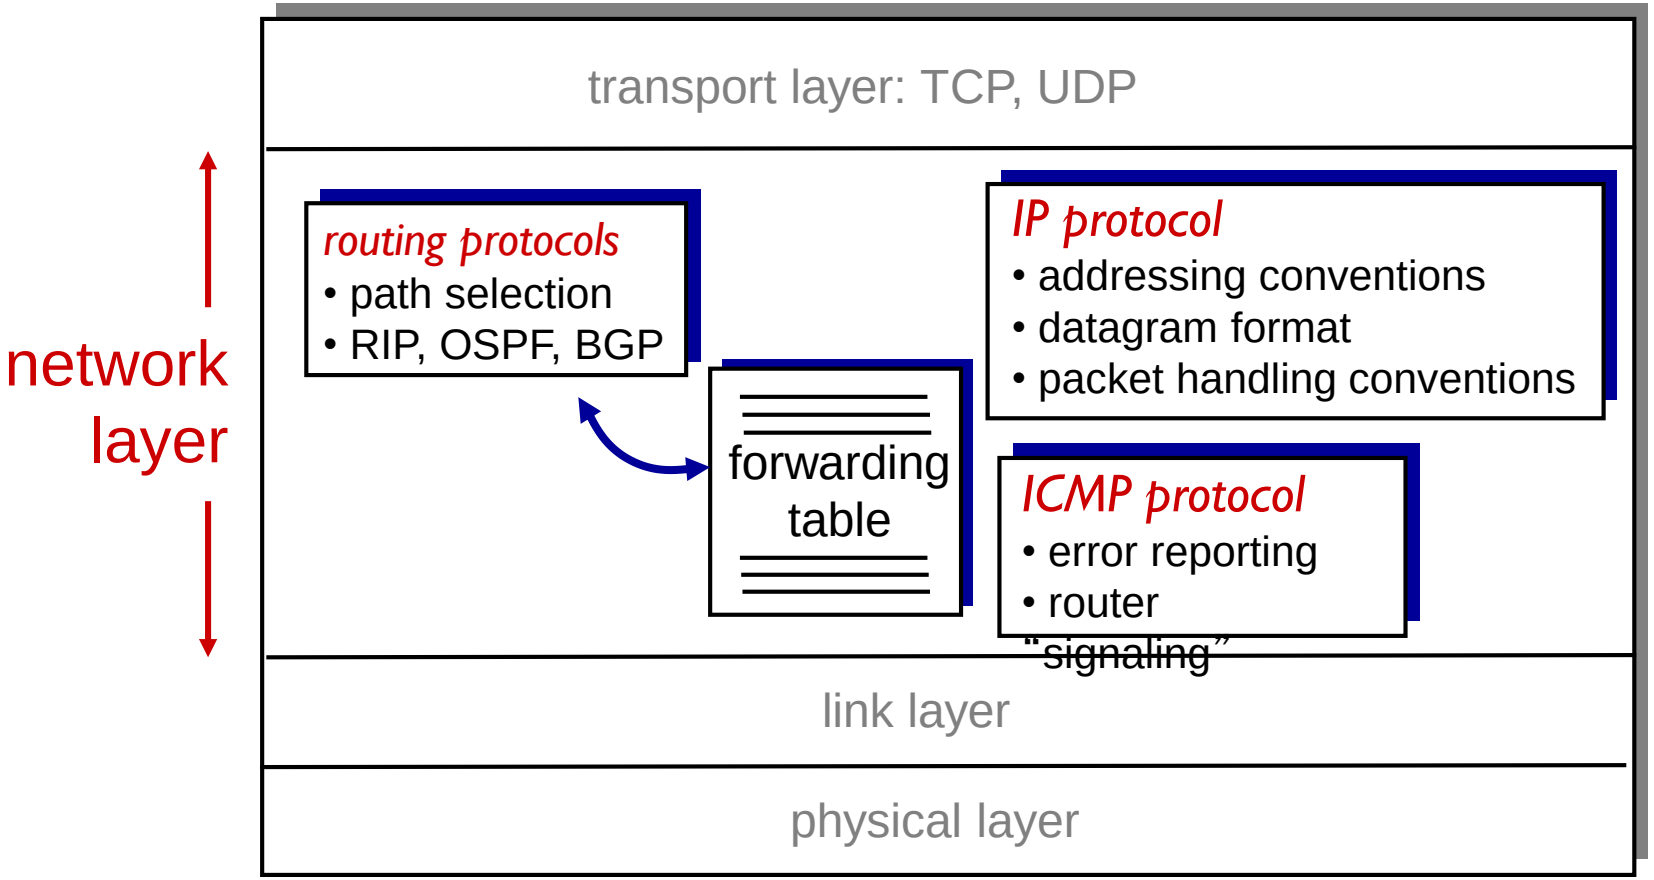

IP datagram format

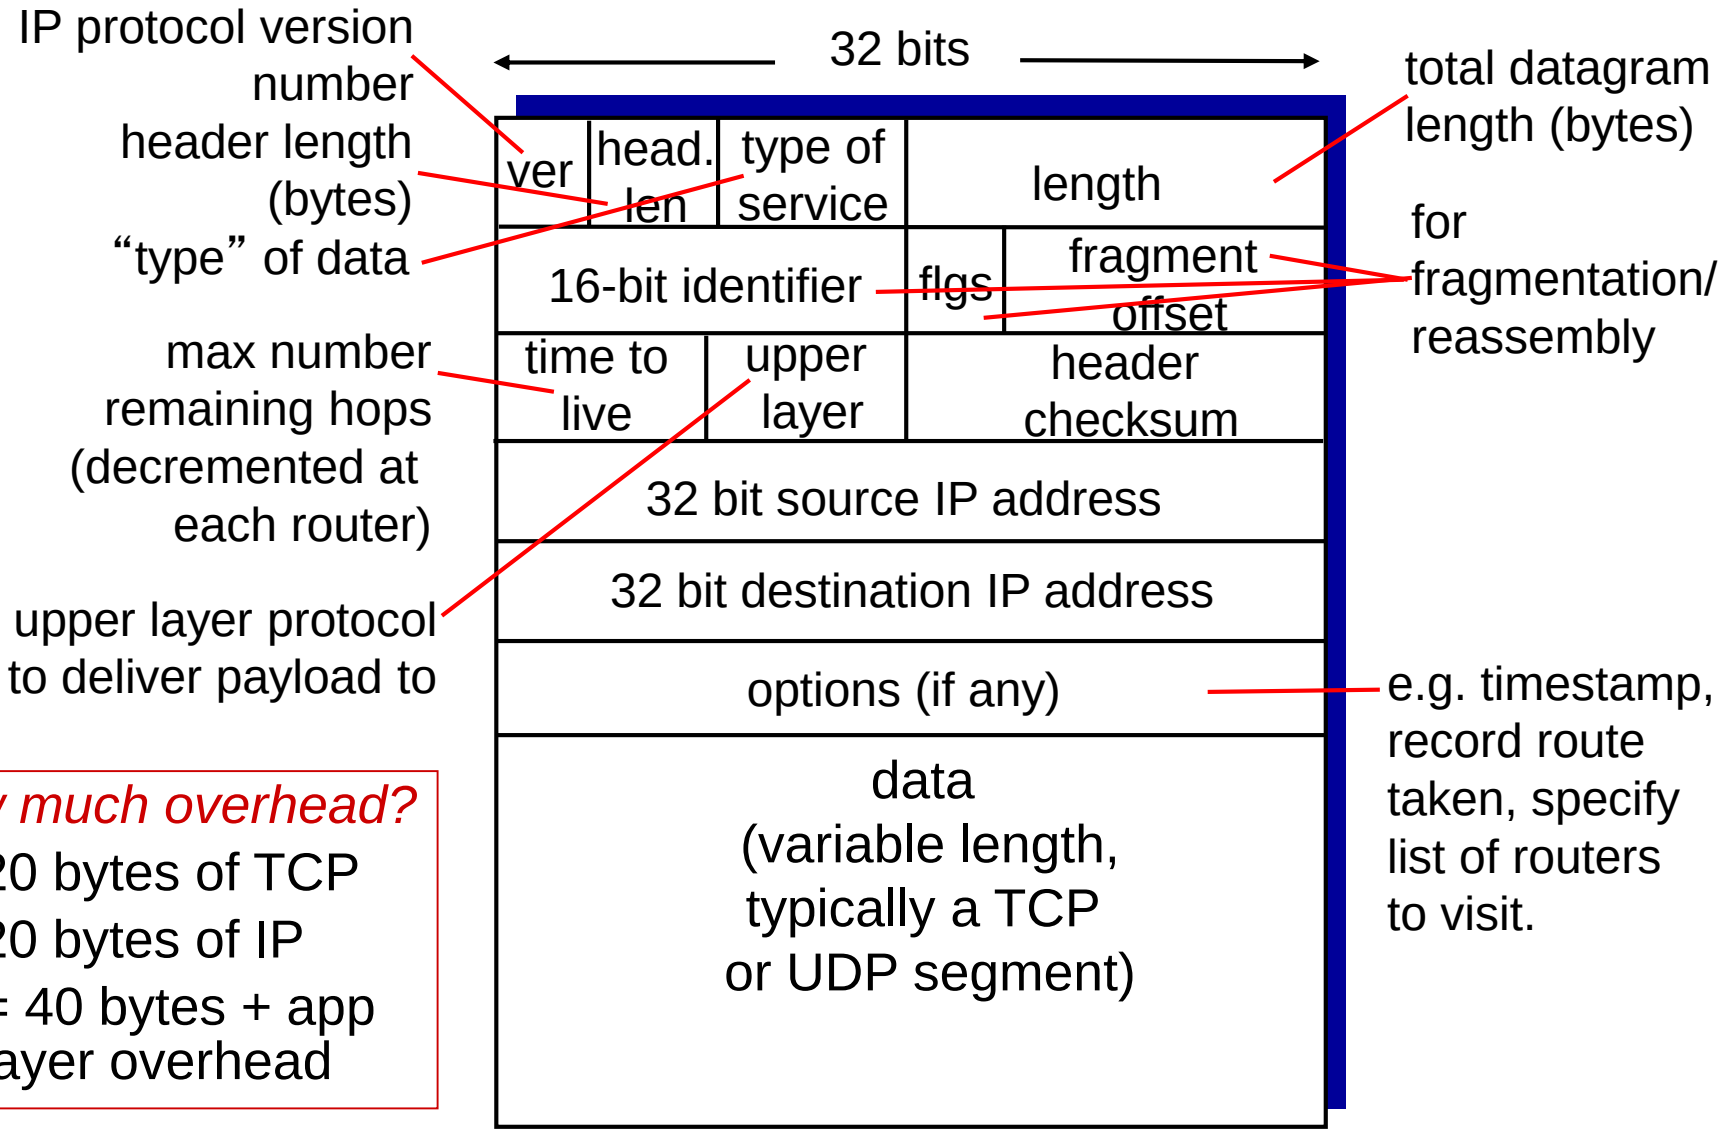

how much overhead?

- 20 bytes of TCP
- 20 bytes of IP
- = 40 bytes + app layer overhead

IP fragmentation, reassembly

- network links have MTU (max.transfer size) - largest possible link-level frame
  - different link types, different MTUs
- large IP datagram divided ("fragmented") within net
  - one datagram becomes several datagrams
  - "reassembled" only at final destination
  - IP header bits used to identify, order related fragments

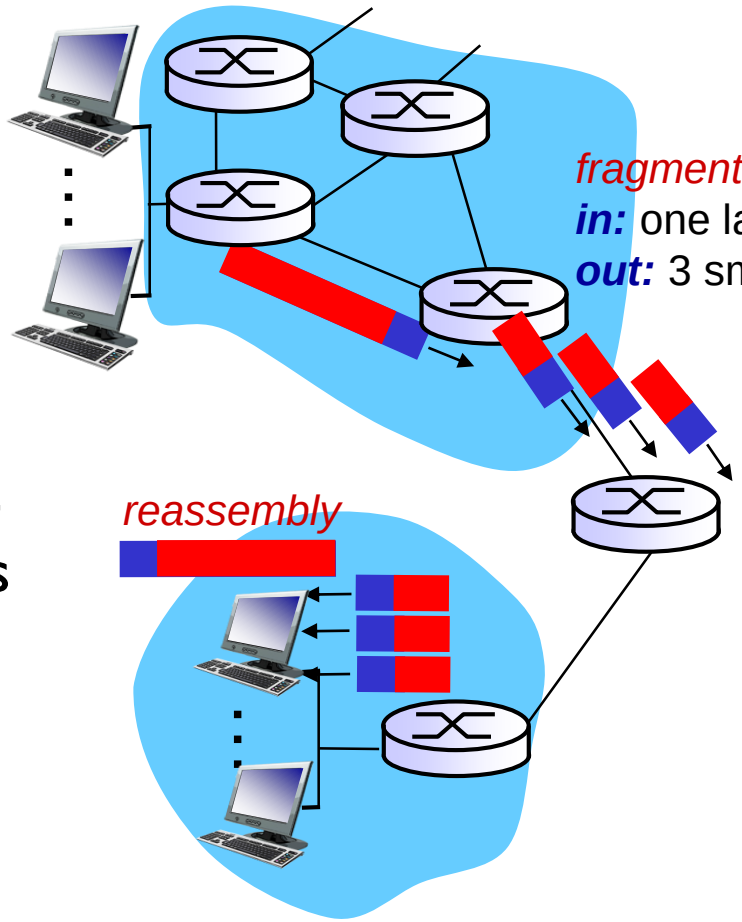

IP fragmentation, reassembly

example:

- 4000 byte datagram
- MTU = 1500 bytes

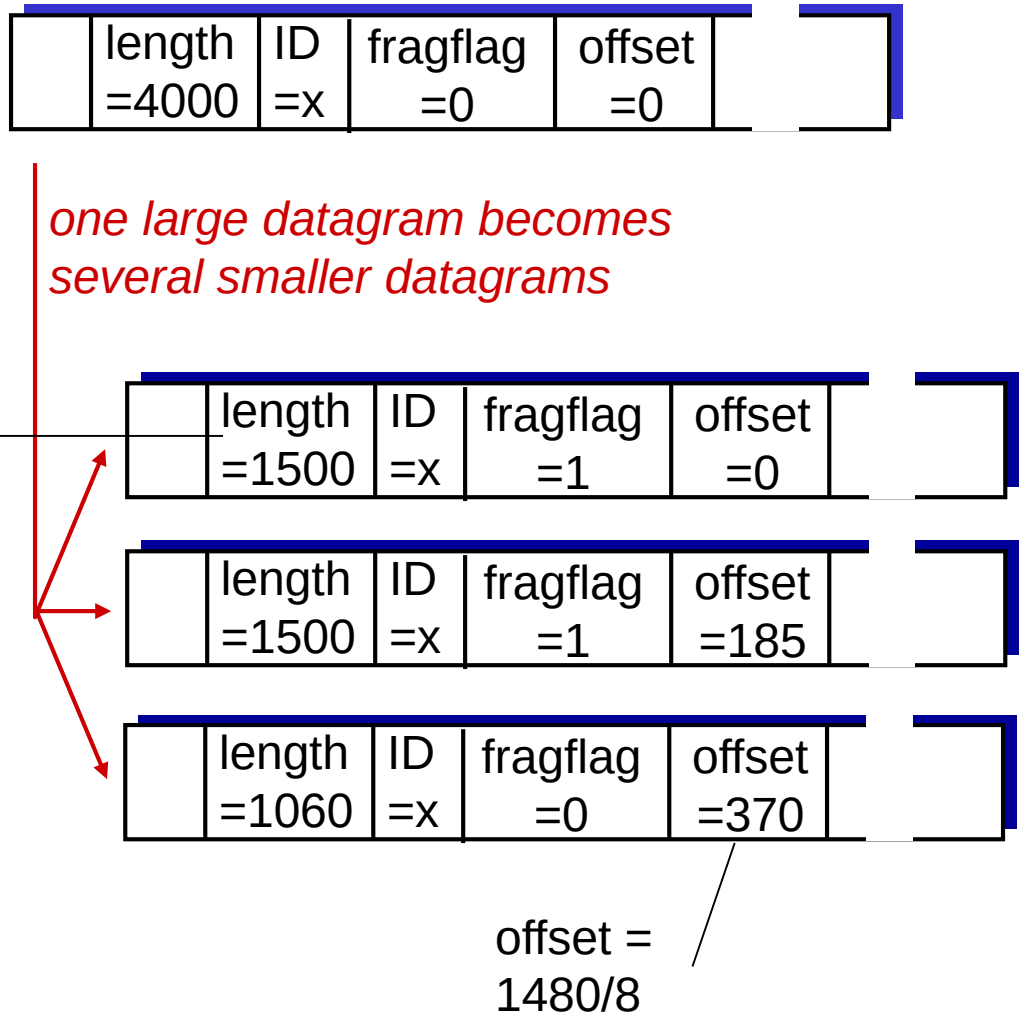

Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol

- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms

- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet

- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing