




IO23=IRQ/RESET
IO18=NSS/SEL
IO5=SCK
IO27=MOSI/SDI
IO19=MISO/SDO
IO26=DI0/IO0

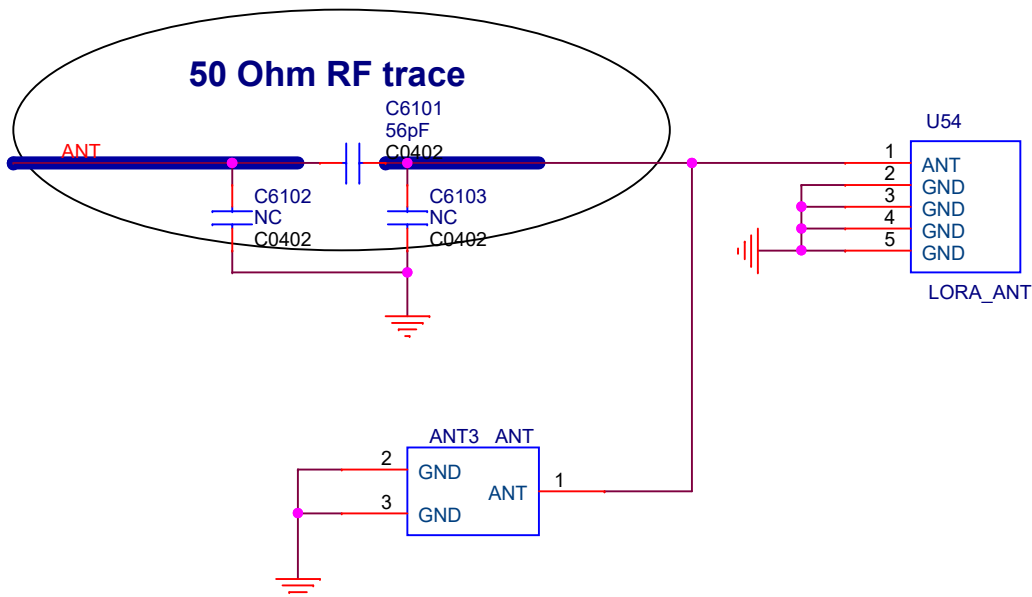



Title		
T22_V1.1		
Size	Document Number	Rev
A	TTGO LORA	V1.1
Date:	Wednesday, April 22, 2020	Sheet 1 of 5

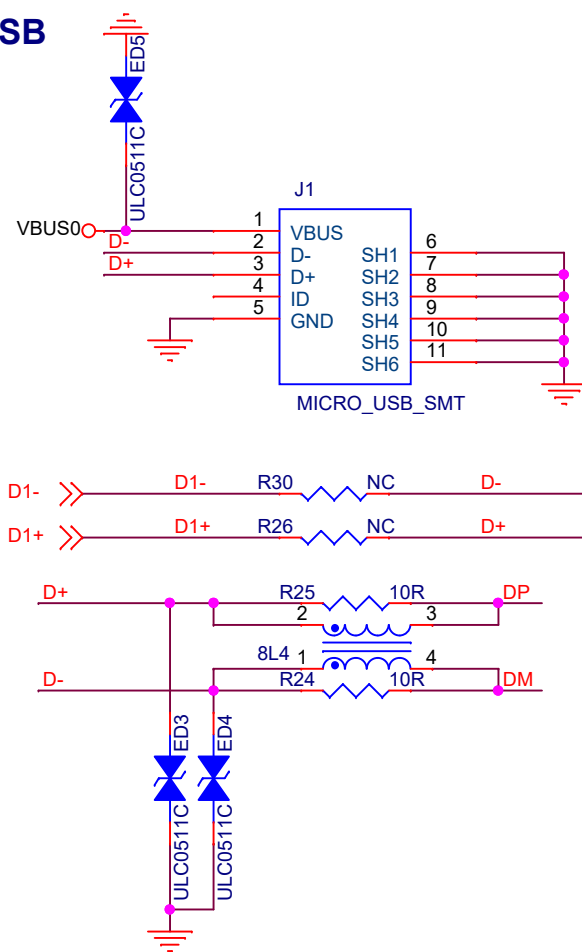


UART

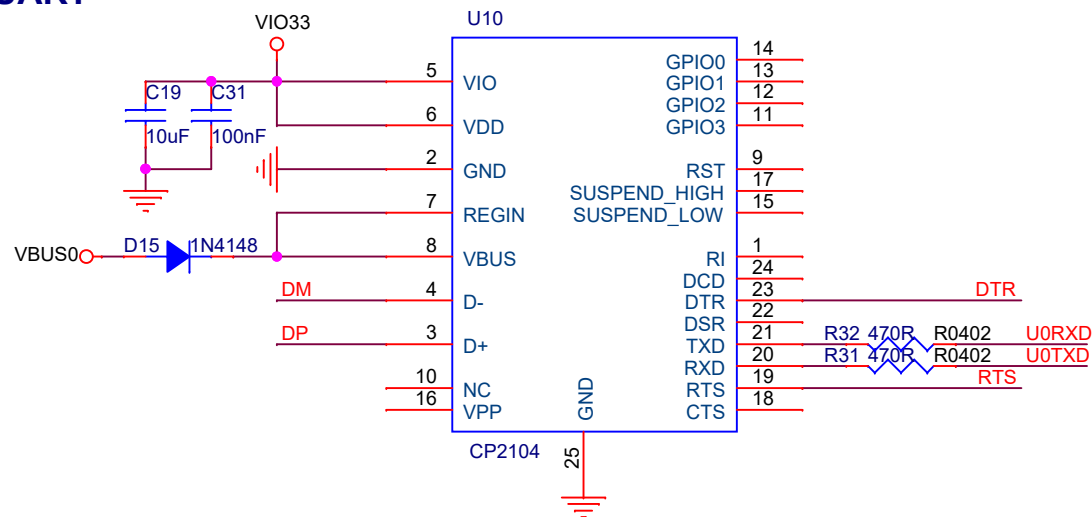

RST

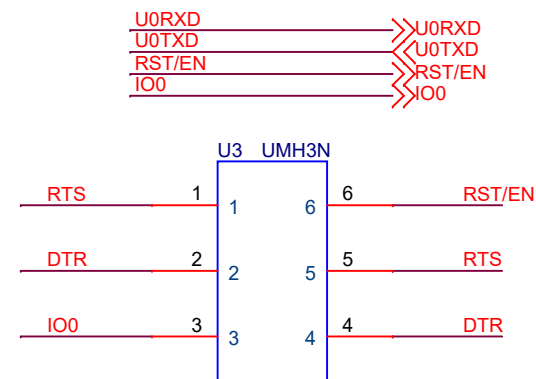


Title T22_V1.1			
Size A	Document Number POWER		Rev V1.1
Date:	Wednesday, April 22, 2020	Sheet	2 of 5

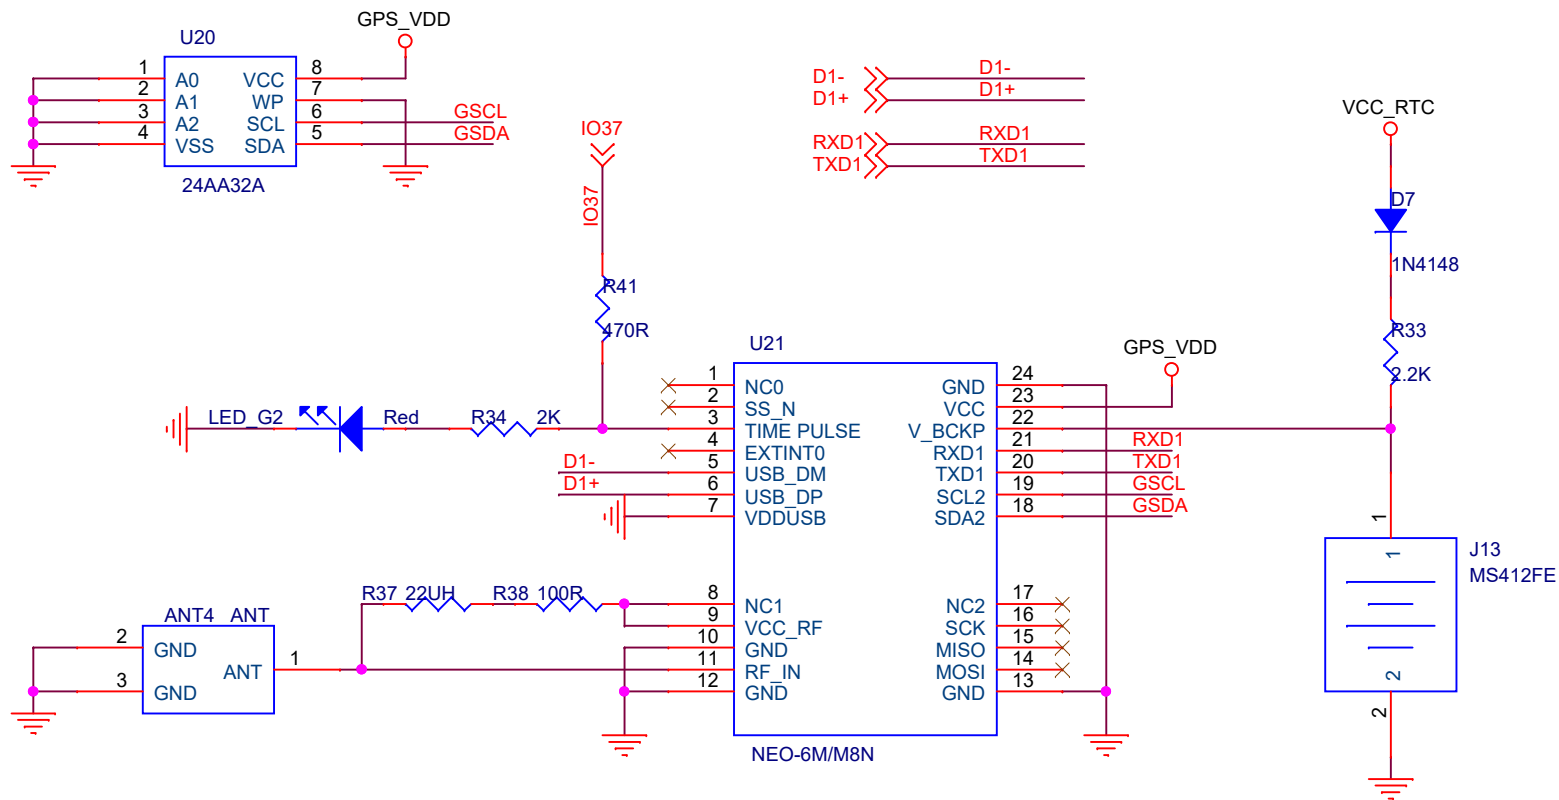


Title		
T22_V1.1		
Size	Document Number	Rev
A	GPS	V1.1
Date:	Wednesday, April 22, 2020	Sheet 3 of 5

Core



ESP32 Module:with 1.8V Flash & SRAM
The operating voltage for signals marked in blue is 1.8V.

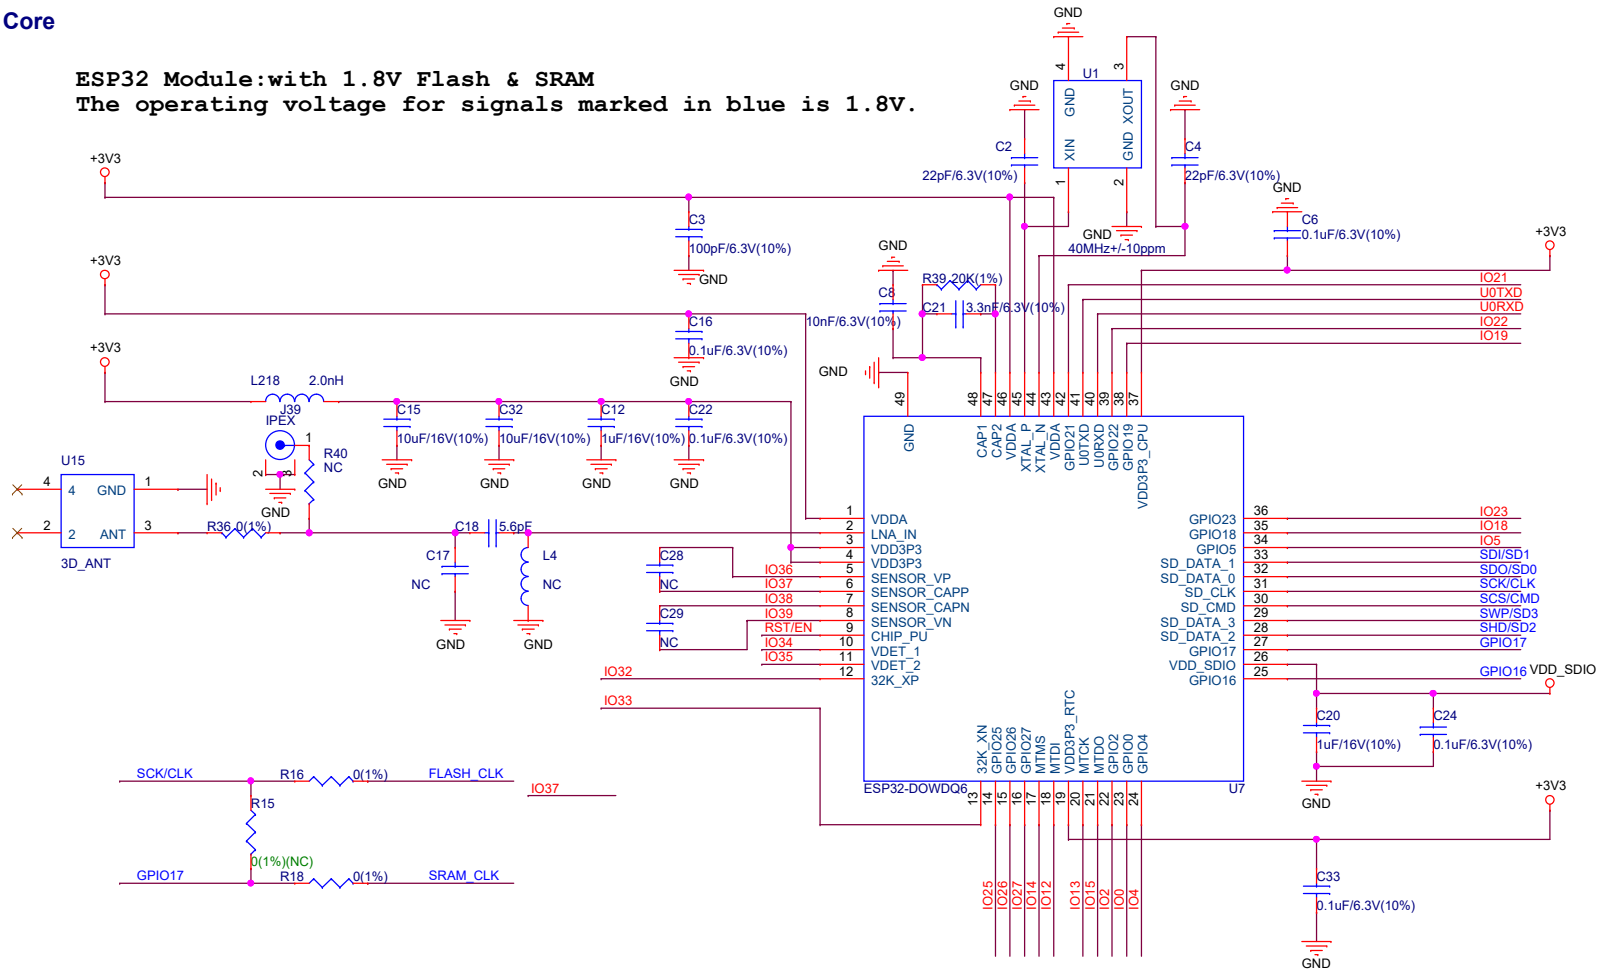


LED

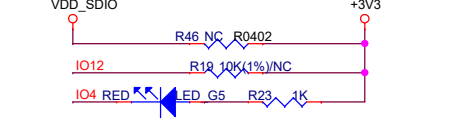


FLASH/PSRAM

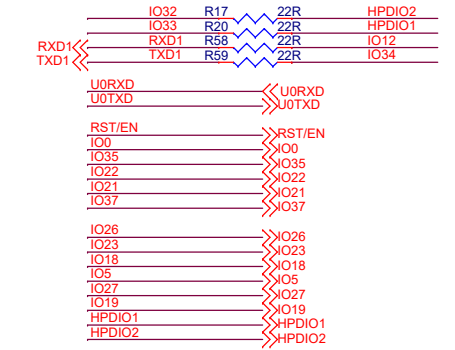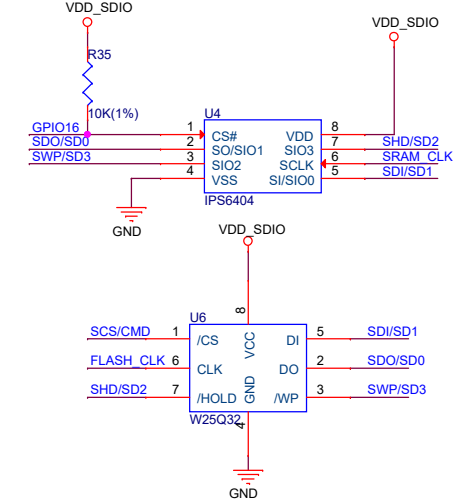


Connector

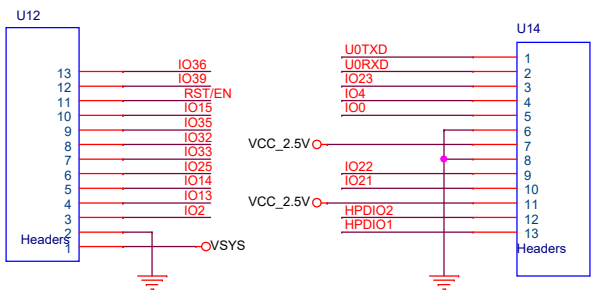

key

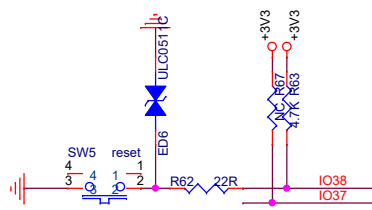

Title		
T22_V1.1		
Size	Document Number	Rev
B	ESP32	V1.1
Date:	Wednesday, April 22, 2020	Sheet 4 of 5

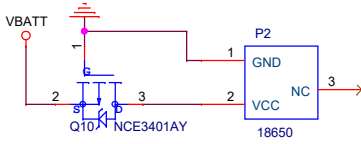

Title				
T22_V1.1				
Size B	Document Number			Rev
	AXP192			V1.
Date:	Thursday, May 21, 2020		Sheet	5 of 5