


Caso 1: HT off vs HT on, pin cores (IC95%, baseline propio de cada condicion)

SMT: speedup



CMP: speedup

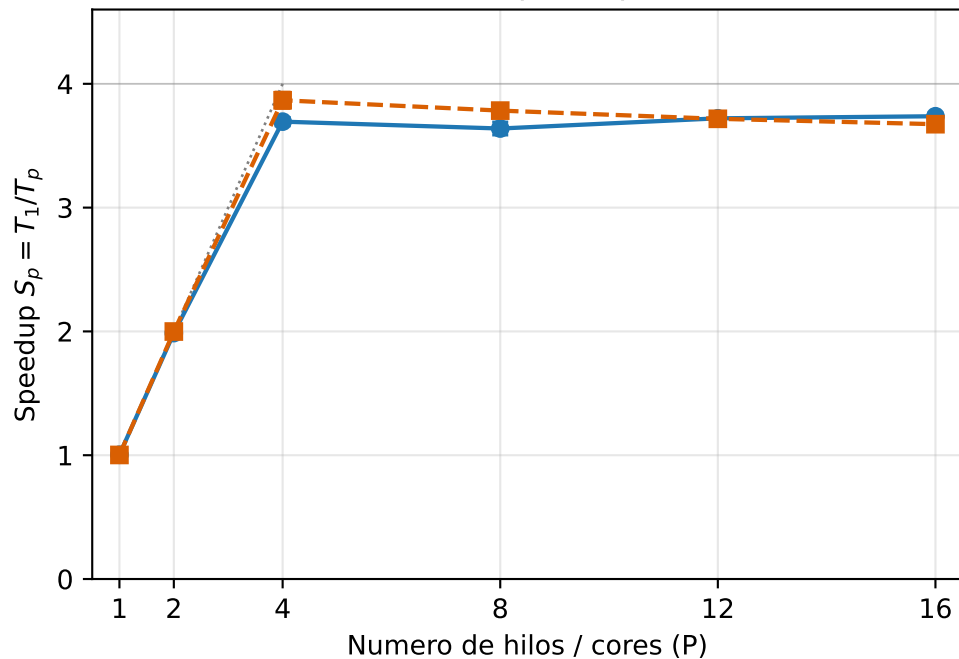