


S60


Swing-In Hinged Door

CERTIFICATIONS

- Air infiltration & Exfiltration (ASTM E283/E283M-19) 750 Pa
- Water Penetration (ASTM E331-00 Reapproved 2016) 600 Pa
- Wind Resistance Serviceability (ASTM E330/E330M-14) 1920 Pa
- Wind Resistance Safety (ASTM E330/E330M-14) 2880 Pa
- Maximum Panel Weight up to 150 kg , 1.8mW x 3.0mH
- Maximum Glass Thickness that can be accommodated is 53mm

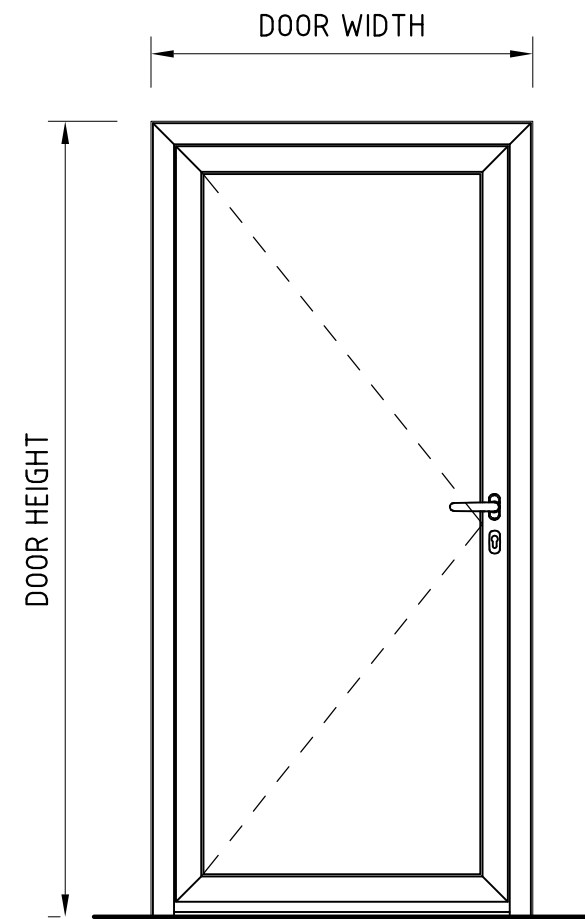


REFERENCE TYPOLOGY

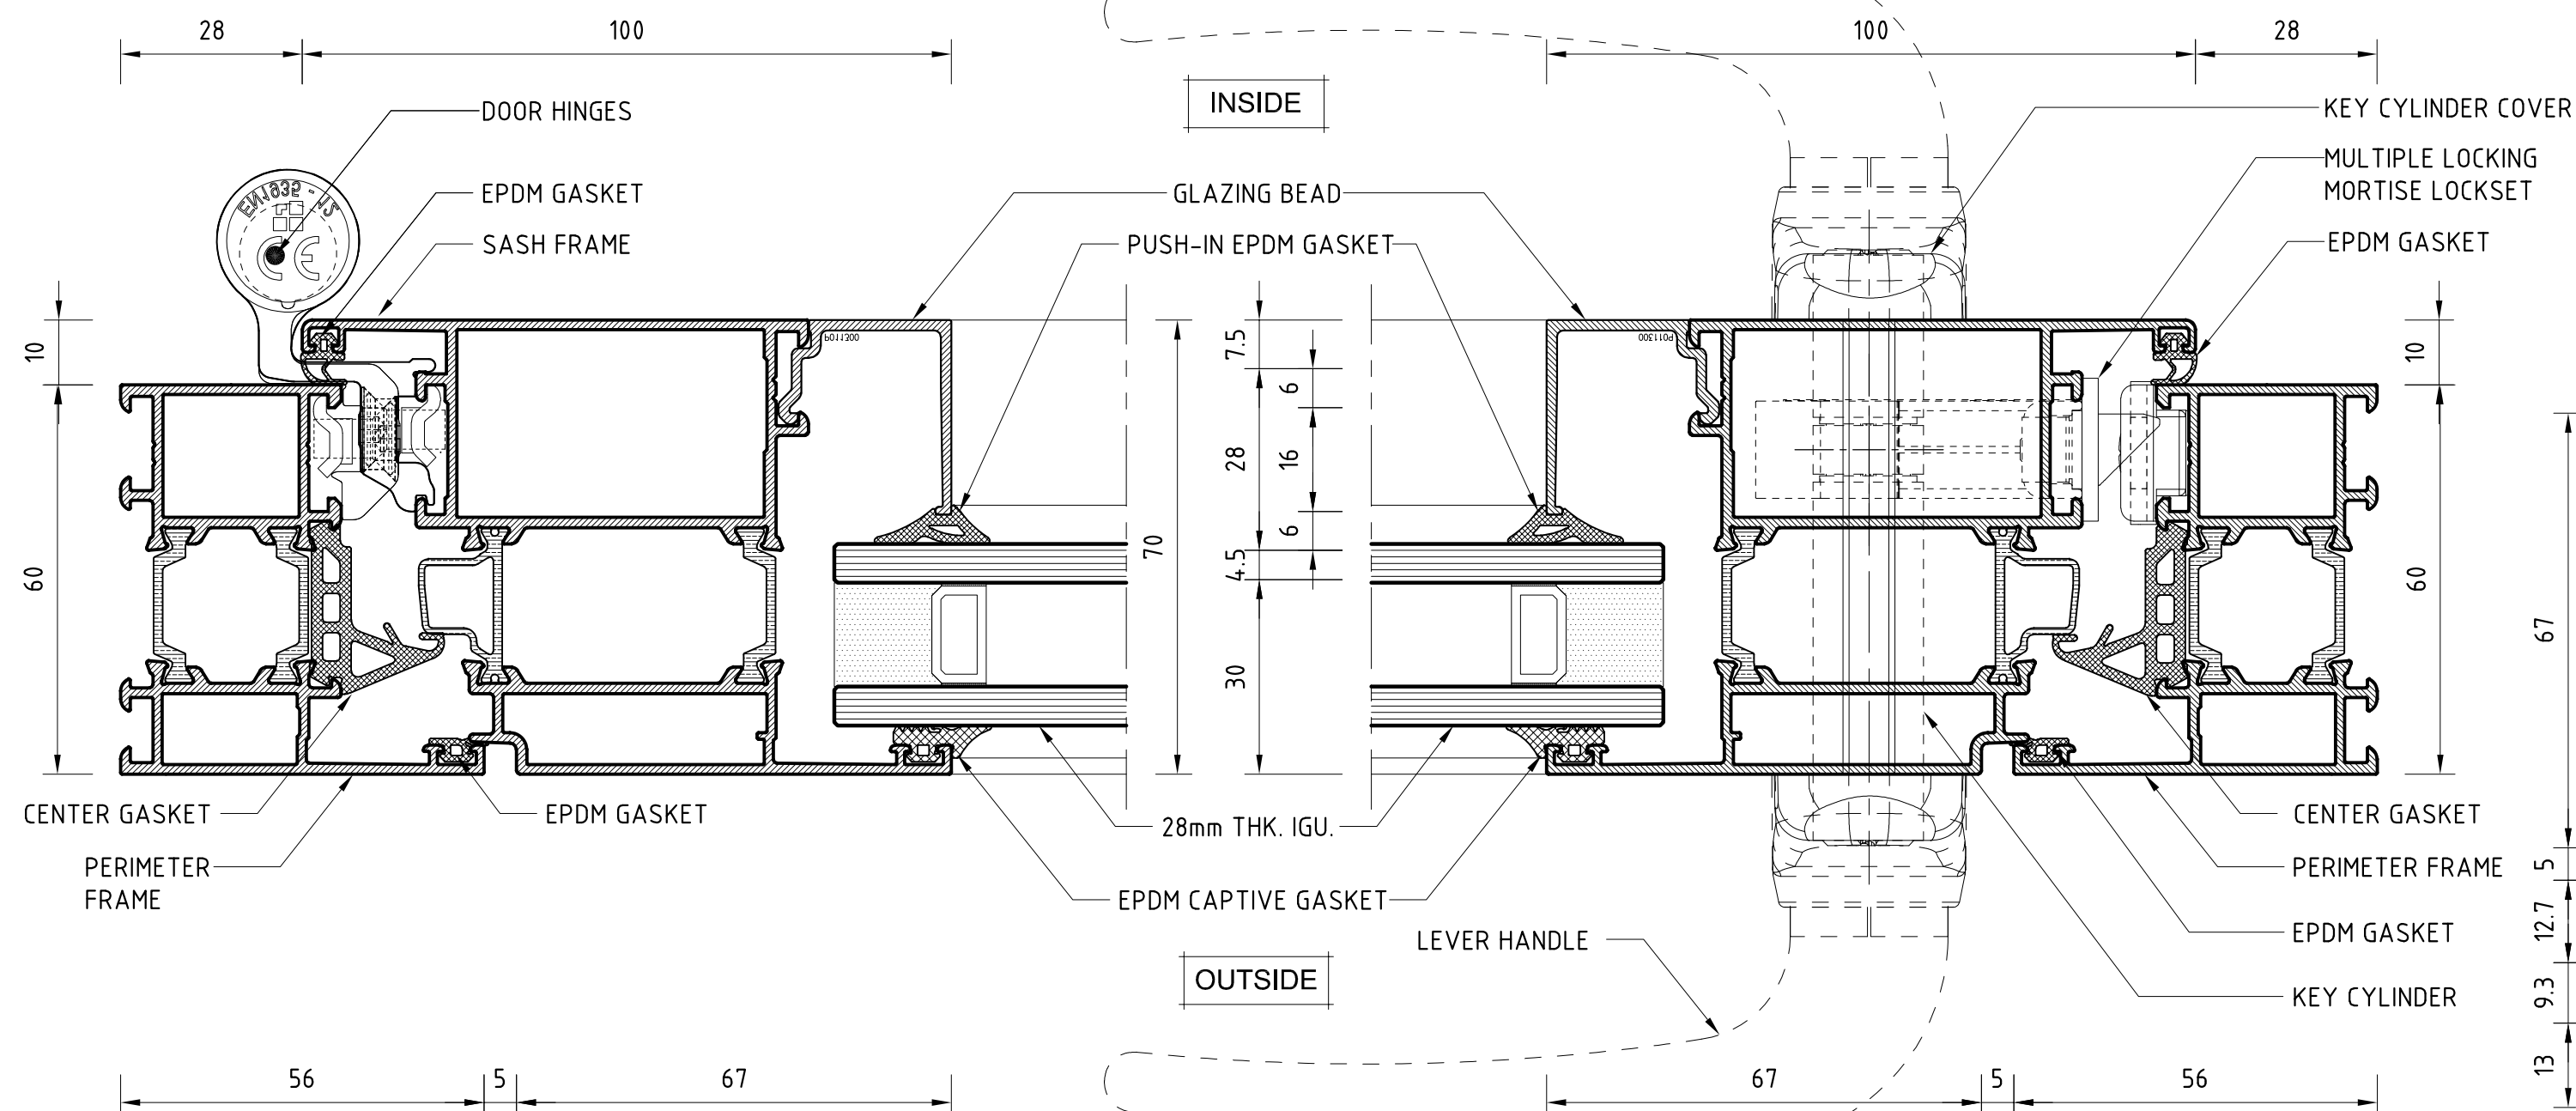


JAMB DETAIL

JAMB DETAIL

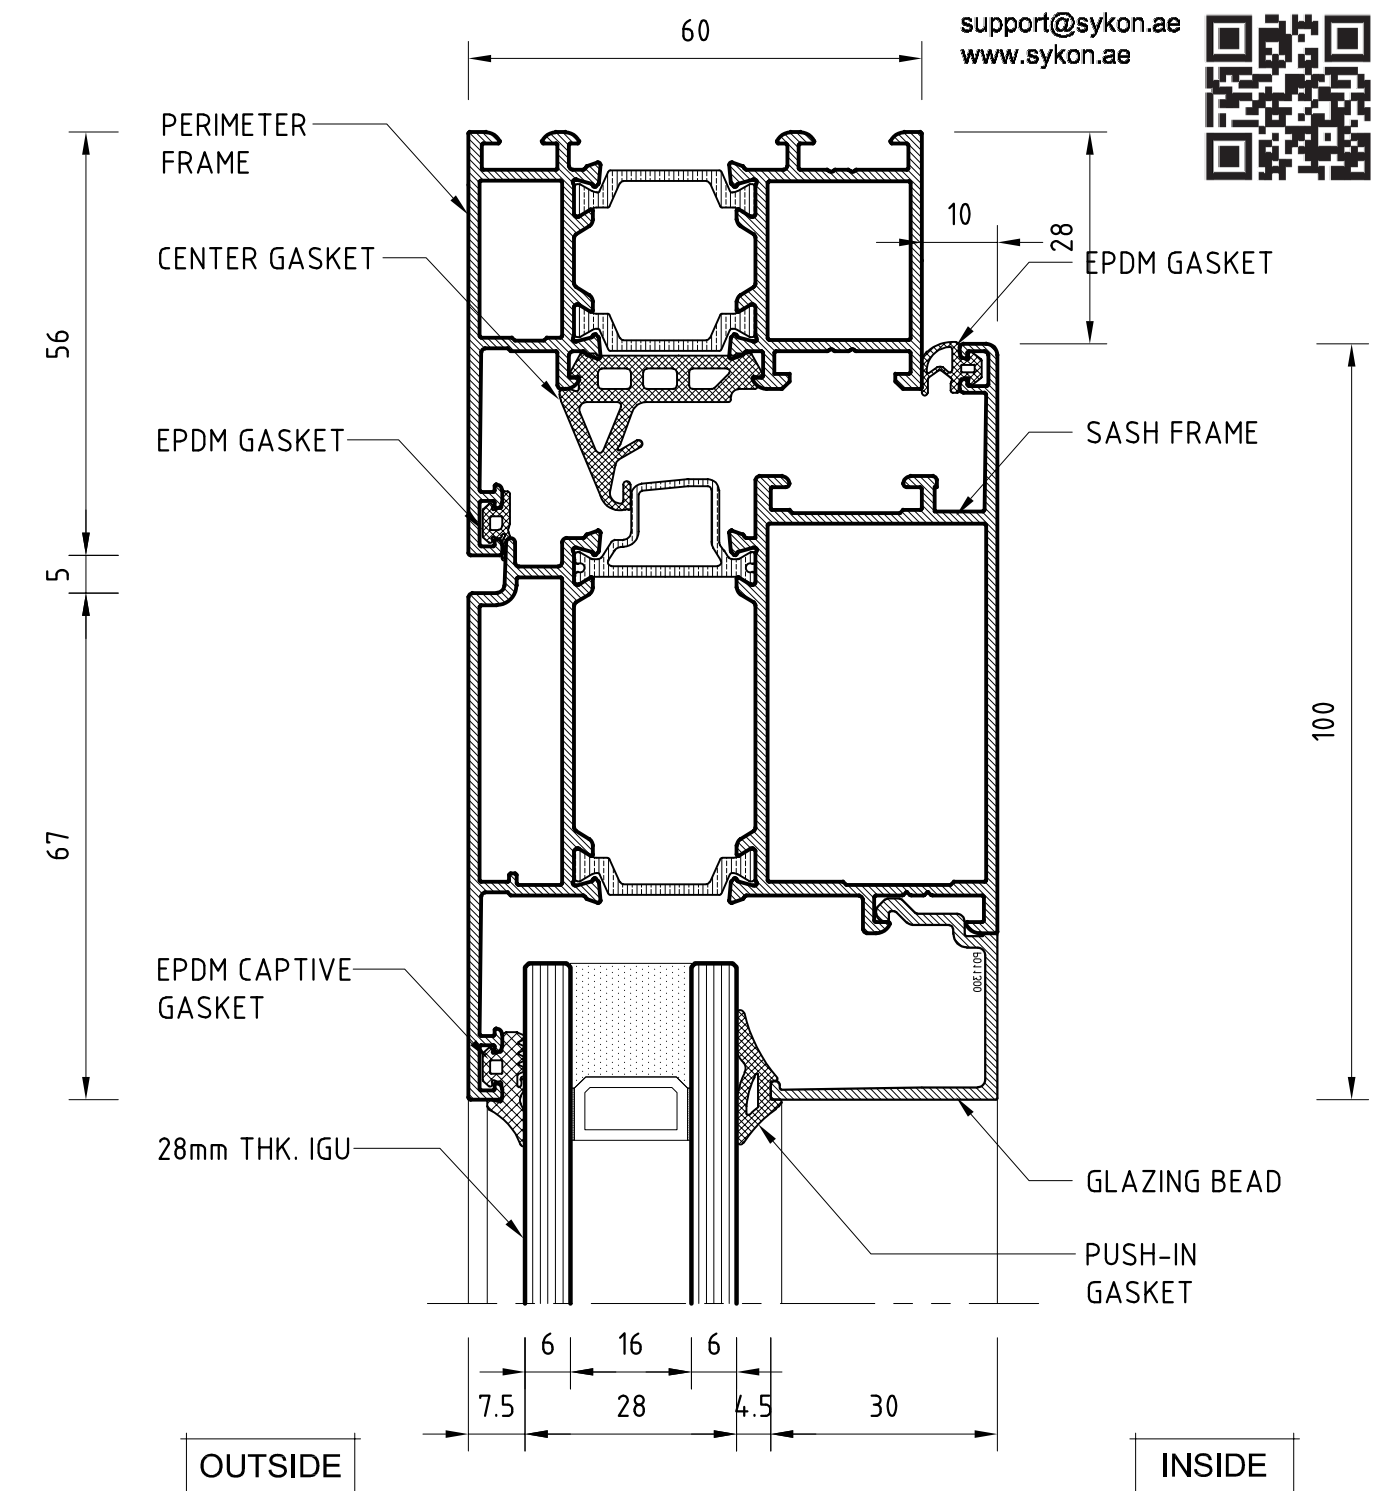

HEAD DETAIL

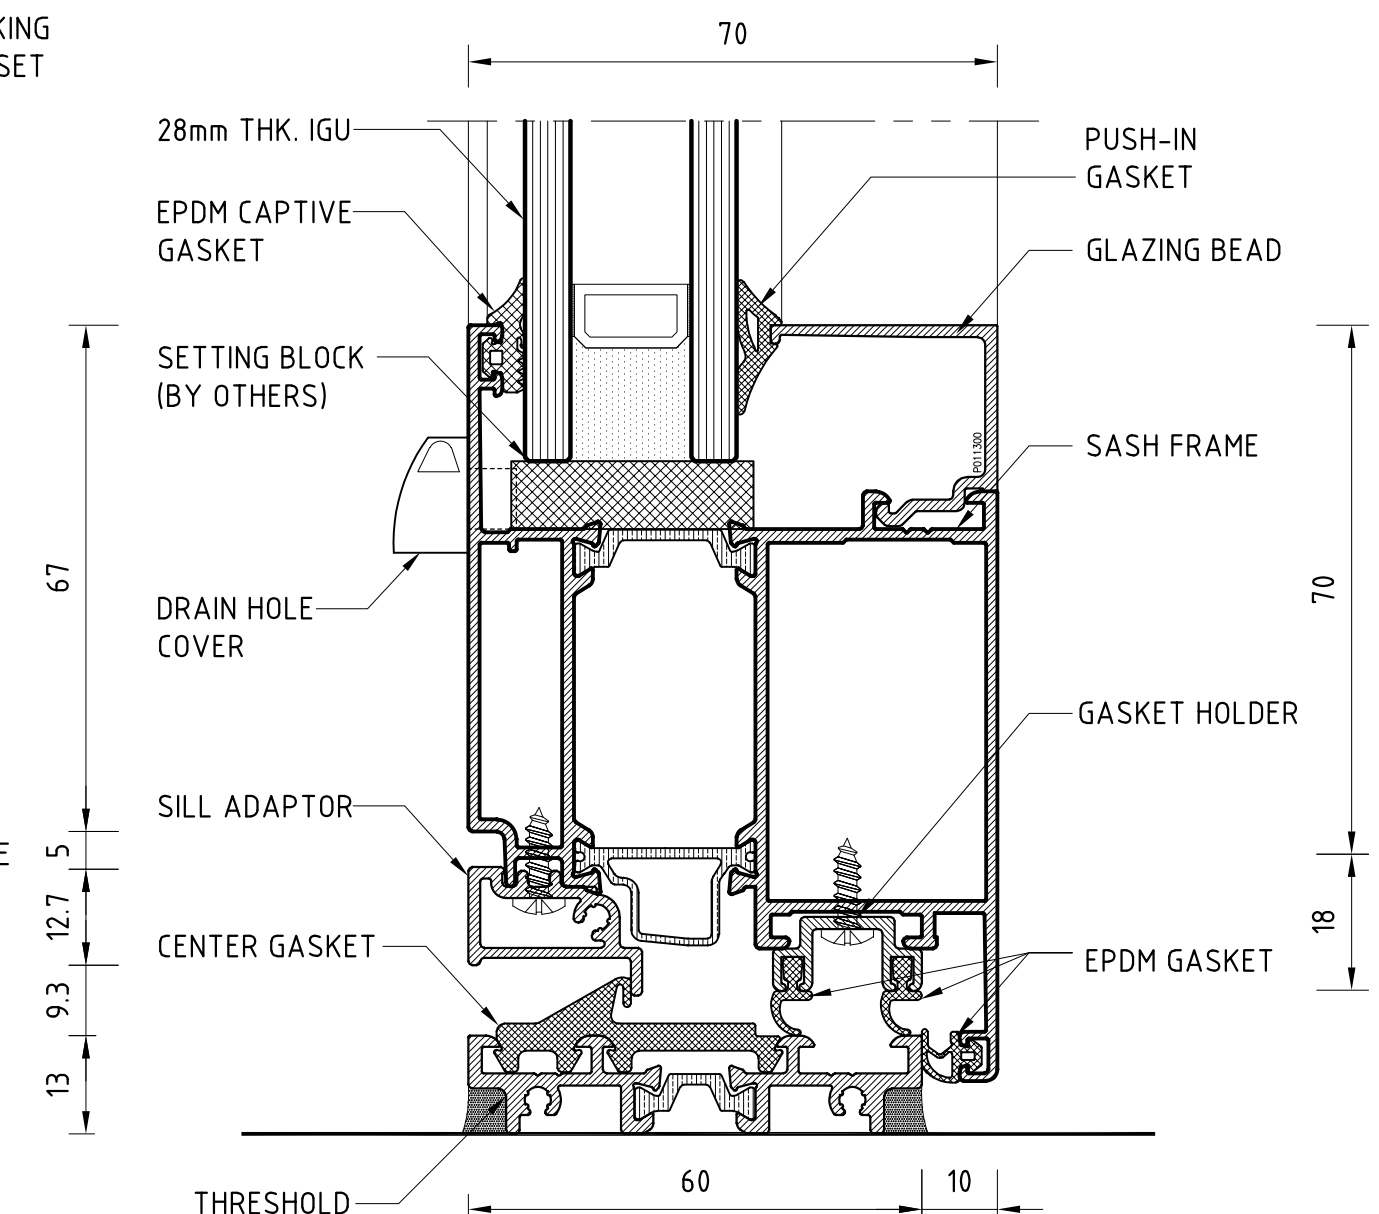

SILL DETAIL

