



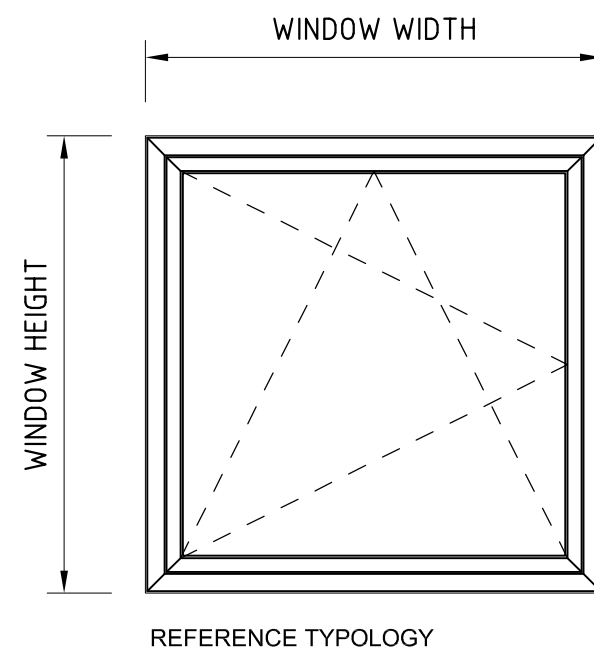

CERTIFICATIONS


- Air infiltration & Exfiltration (ASTM E283/E283M-19) 750 Pa
- Water Penetration (ASTM E331-00 Reapproved 2016) 600 Pa
- Wind Resistance Serviceability (ASTM E330/E330M-14) 1920 Pa
- Wind Resistance Safety (ASTM E330/E330M-14) 2880 Pa
- Maximum Panel Weight up to 130 kg
- Maximum Glass Thickness that can be accommodated is 53mm

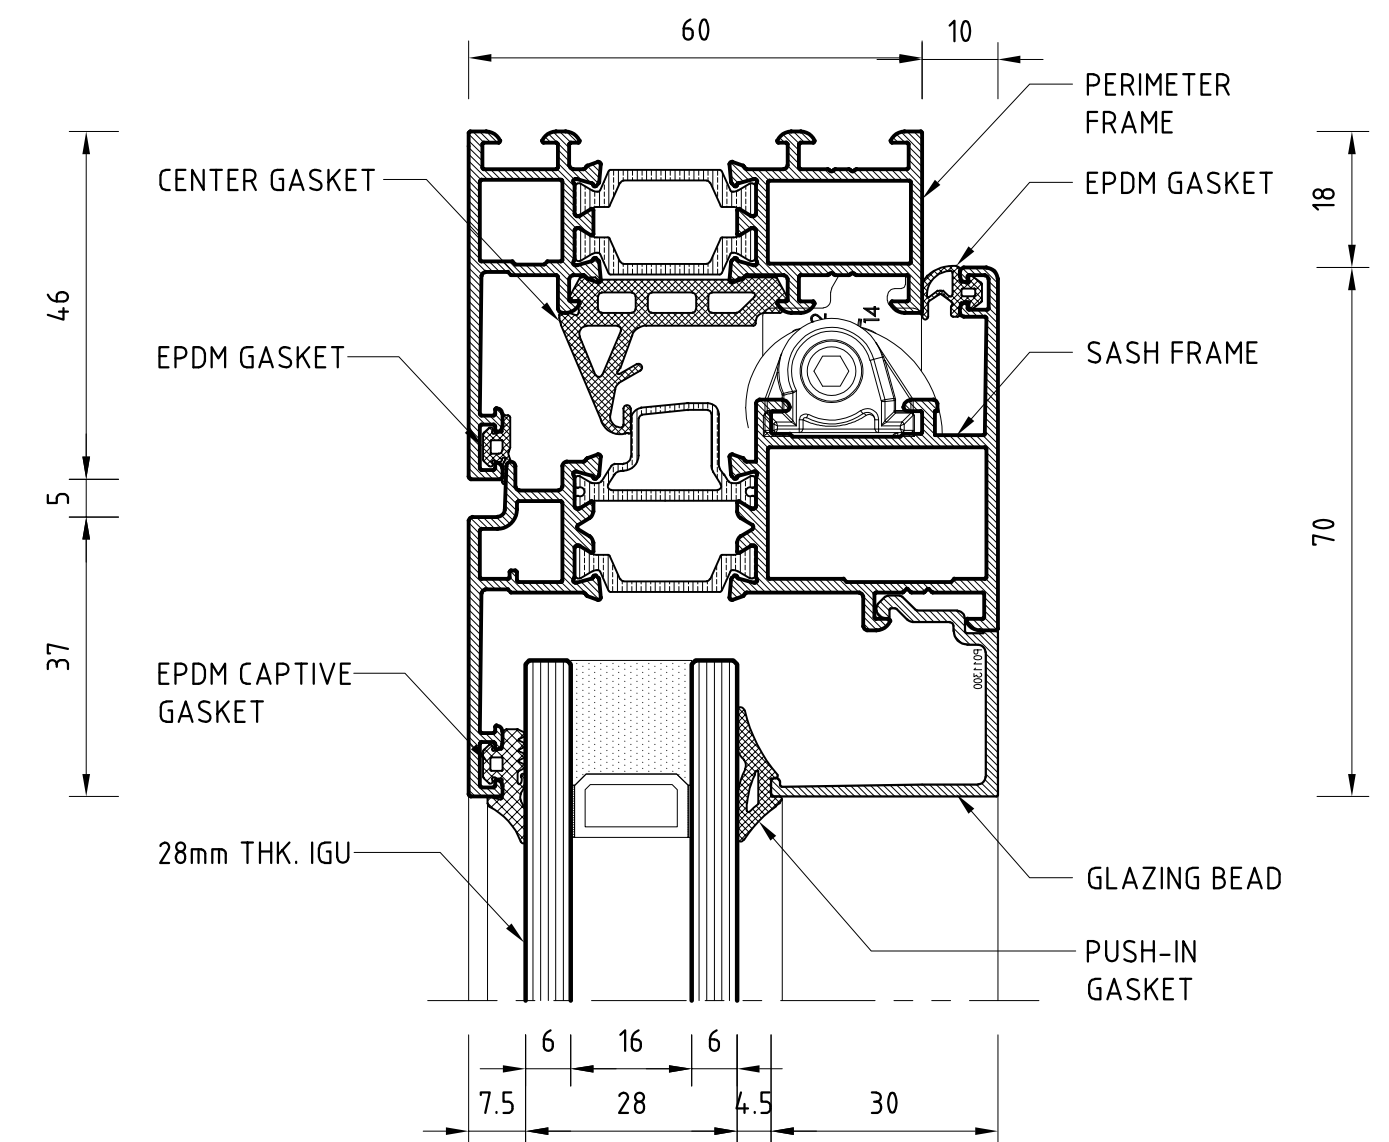

OUTSIDE


HEAD DETAIL

INSIDE

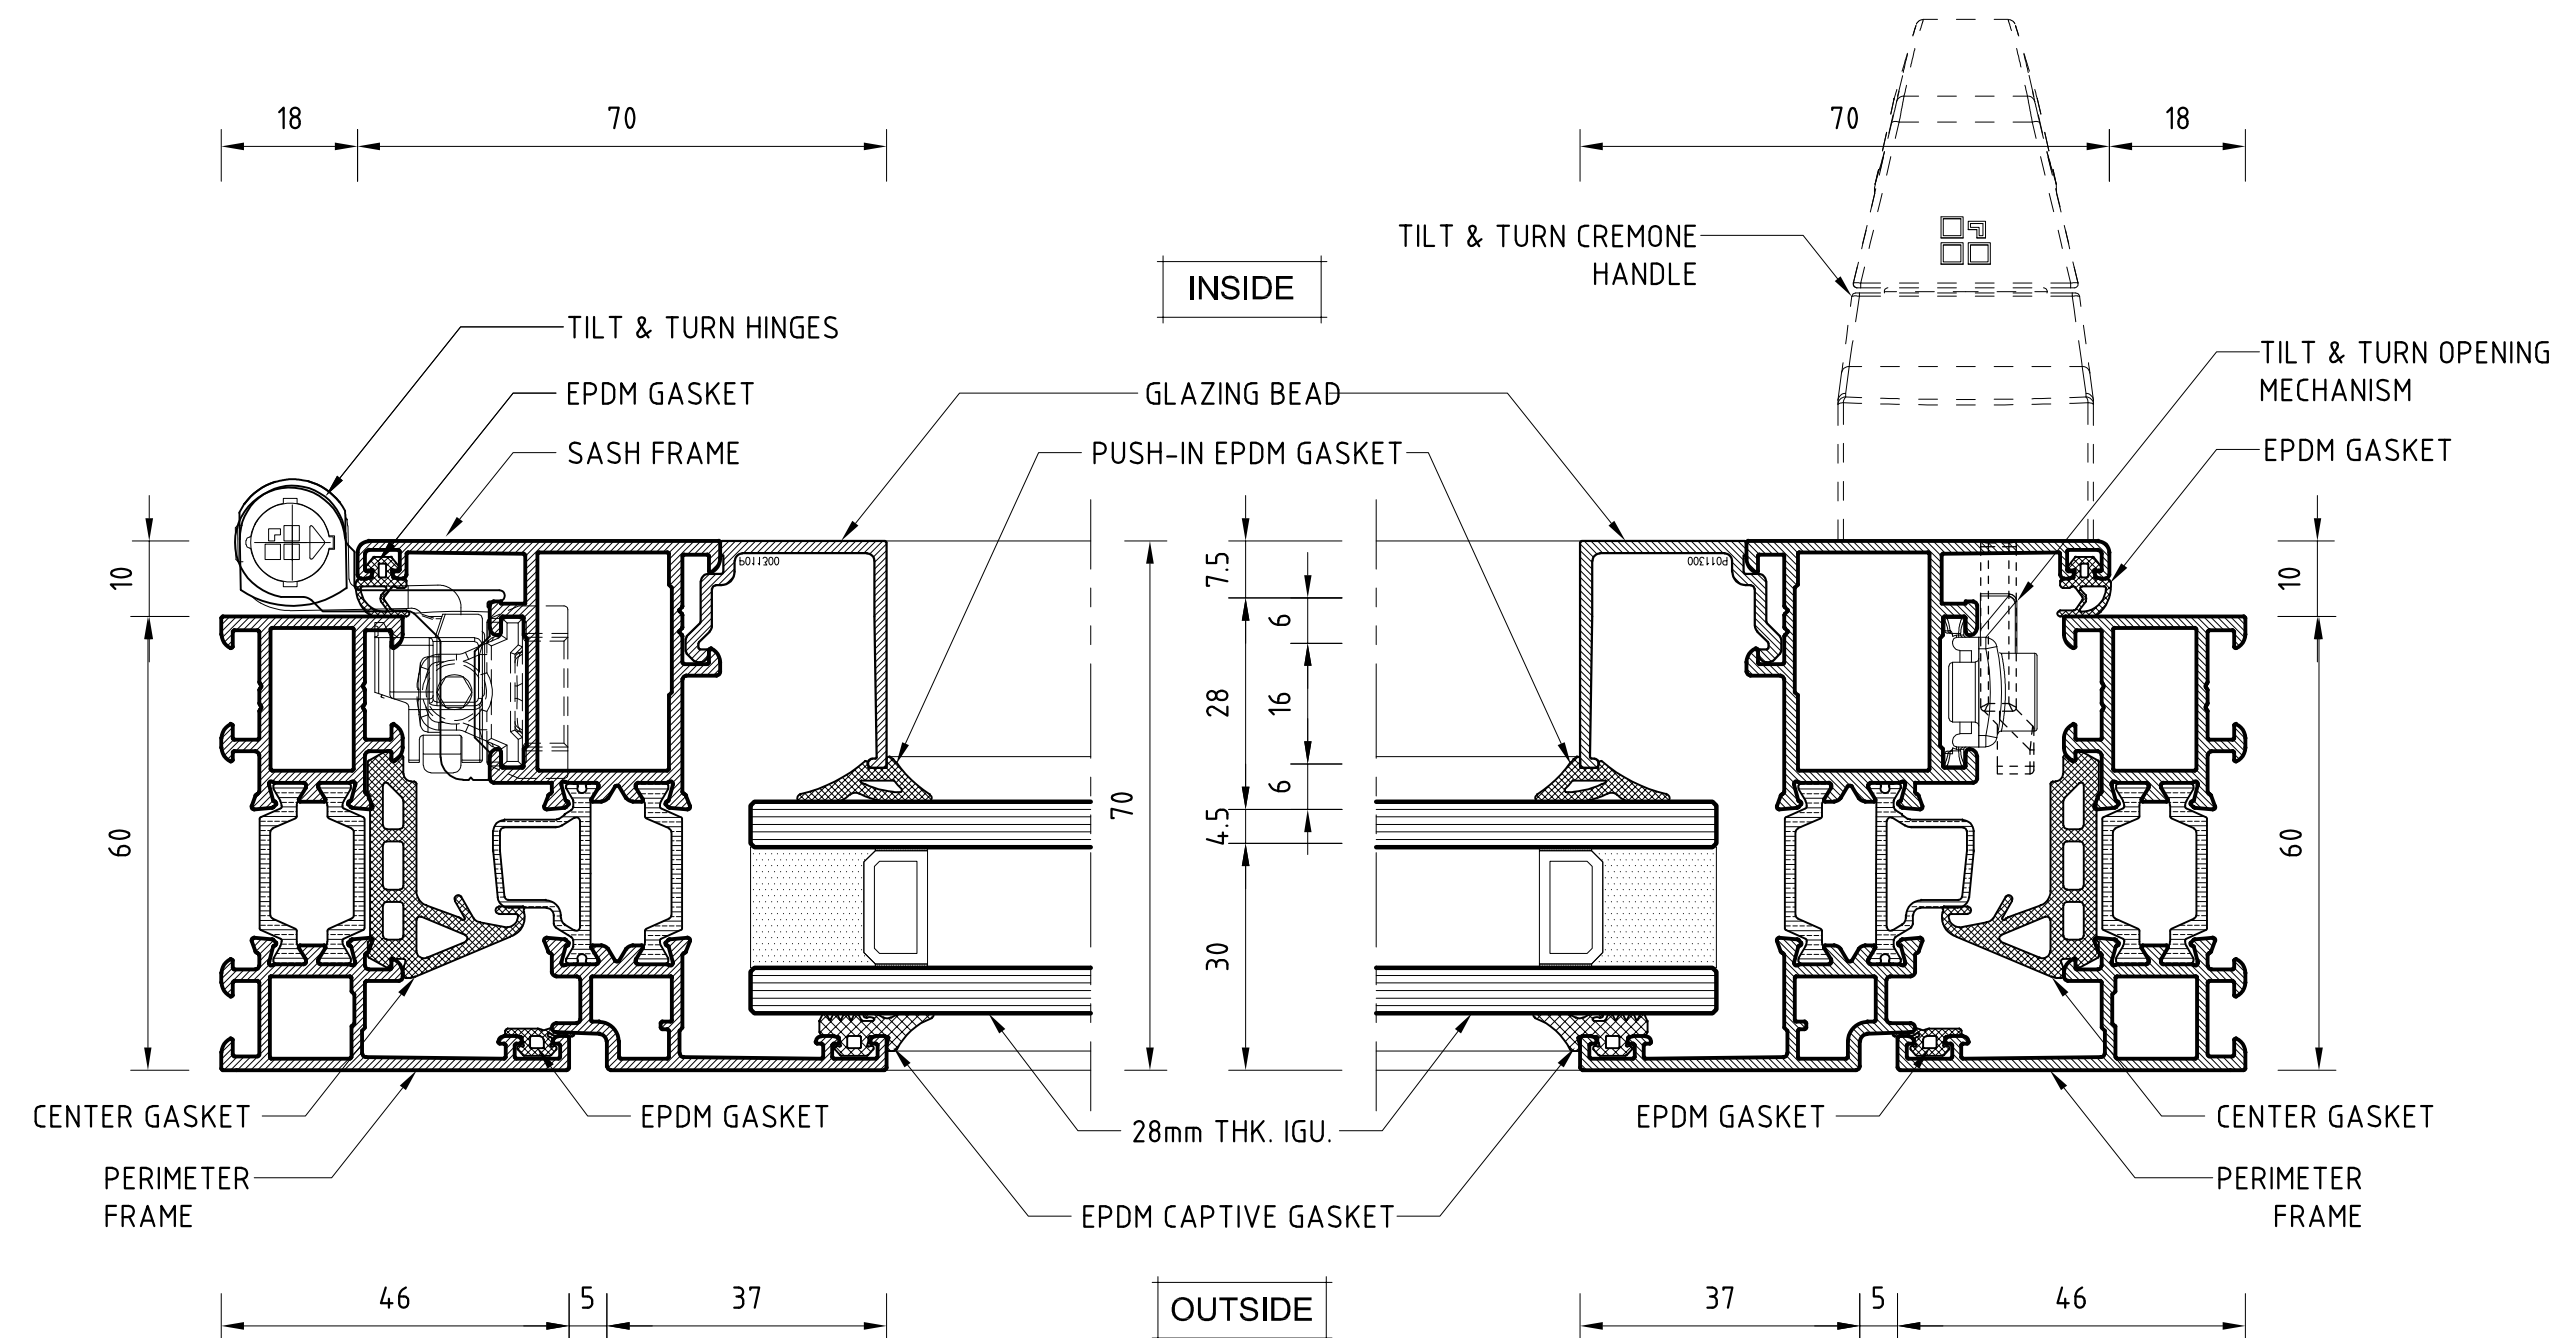

JAMB DETAIL

JAMB DETAIL

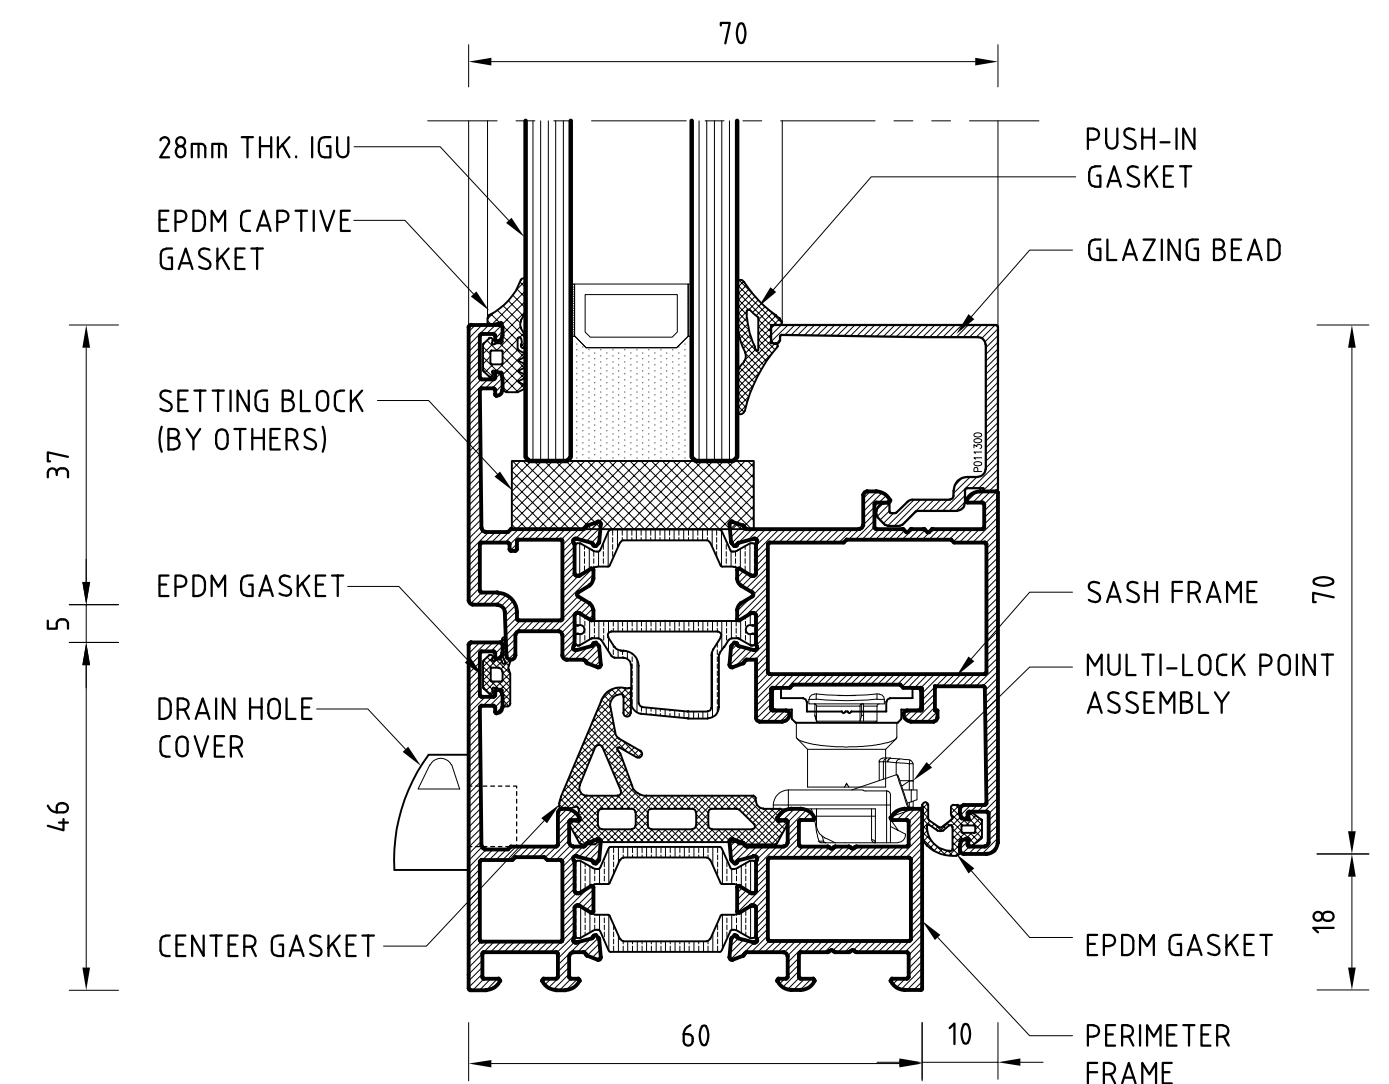

SILL DETAIL