














SL 20

Panoramic Slim Sliding Door System

CERTIFICATIONS

- Air Infiltration & Exfiltration (EN 1026, EN 12207) CLASS 4
- Water Penetration (EN 1027, EN 12208) CLASS E750
- Wind Resistance Serviceability (EN 12210, EN 12211) CLASS C2
- Maximum Glass Thickness that can be accommodated is 53mm

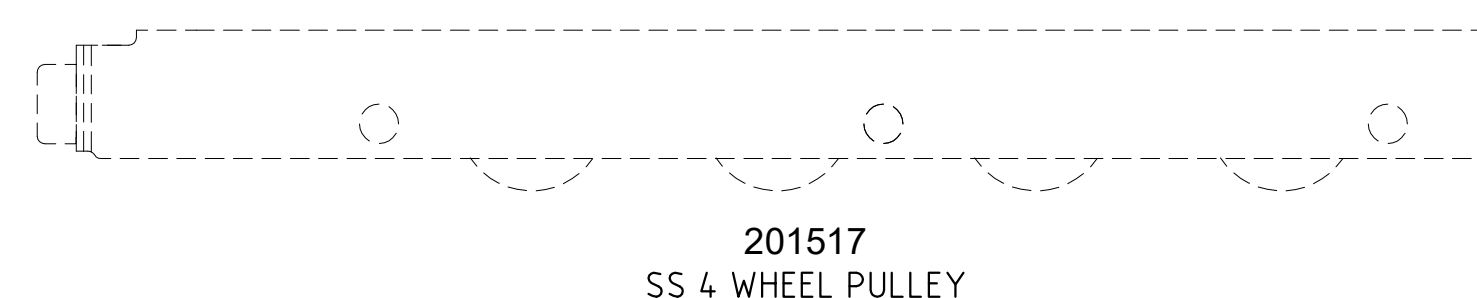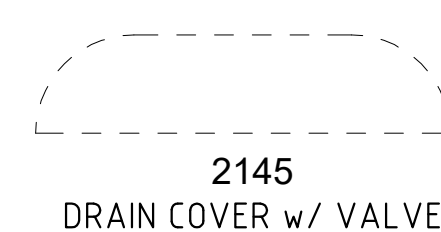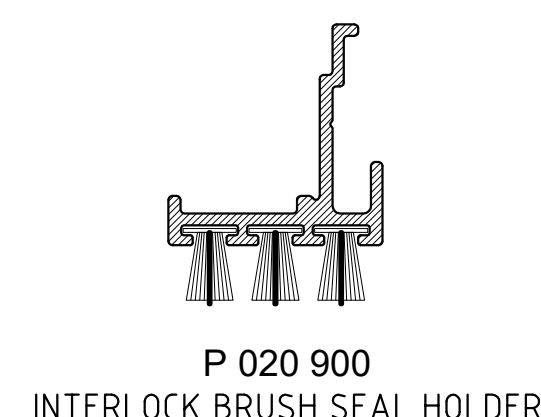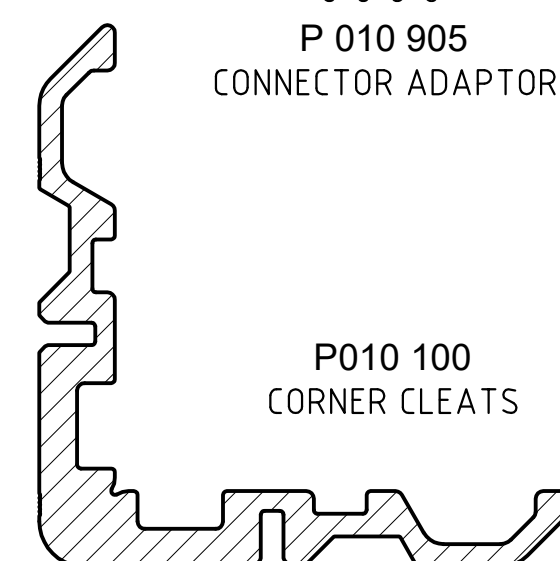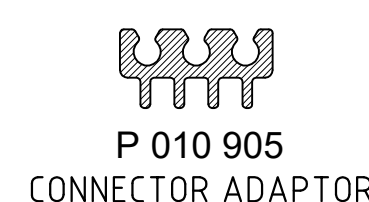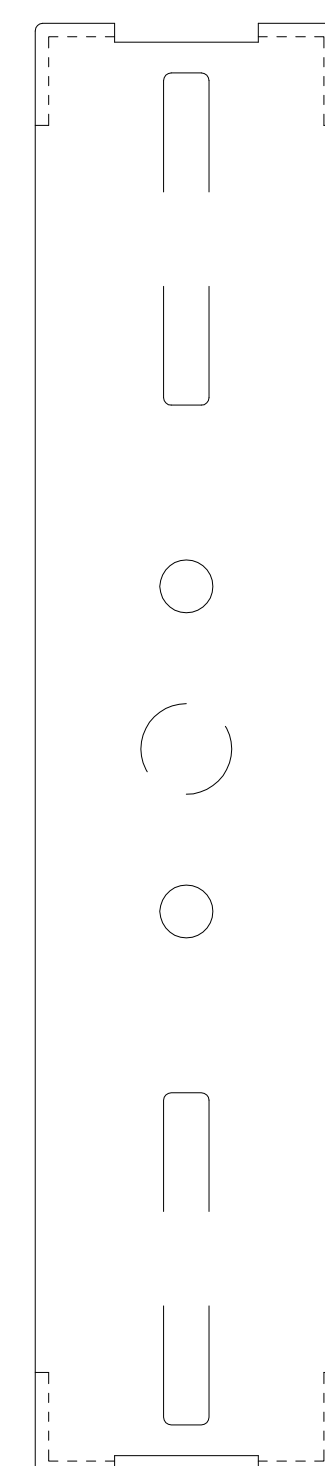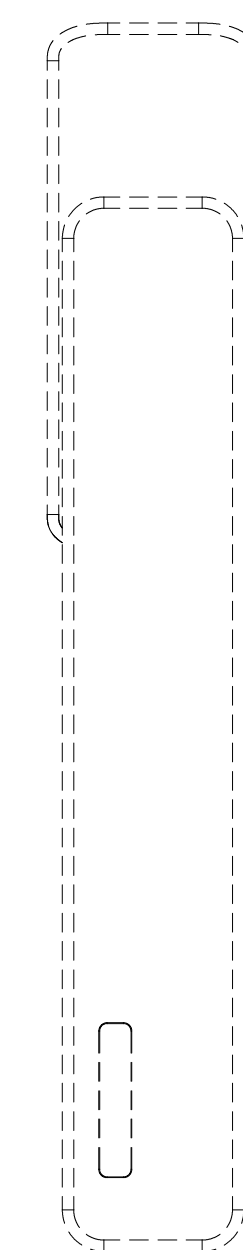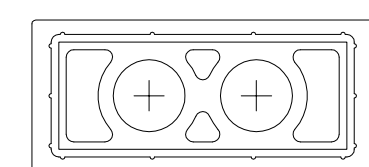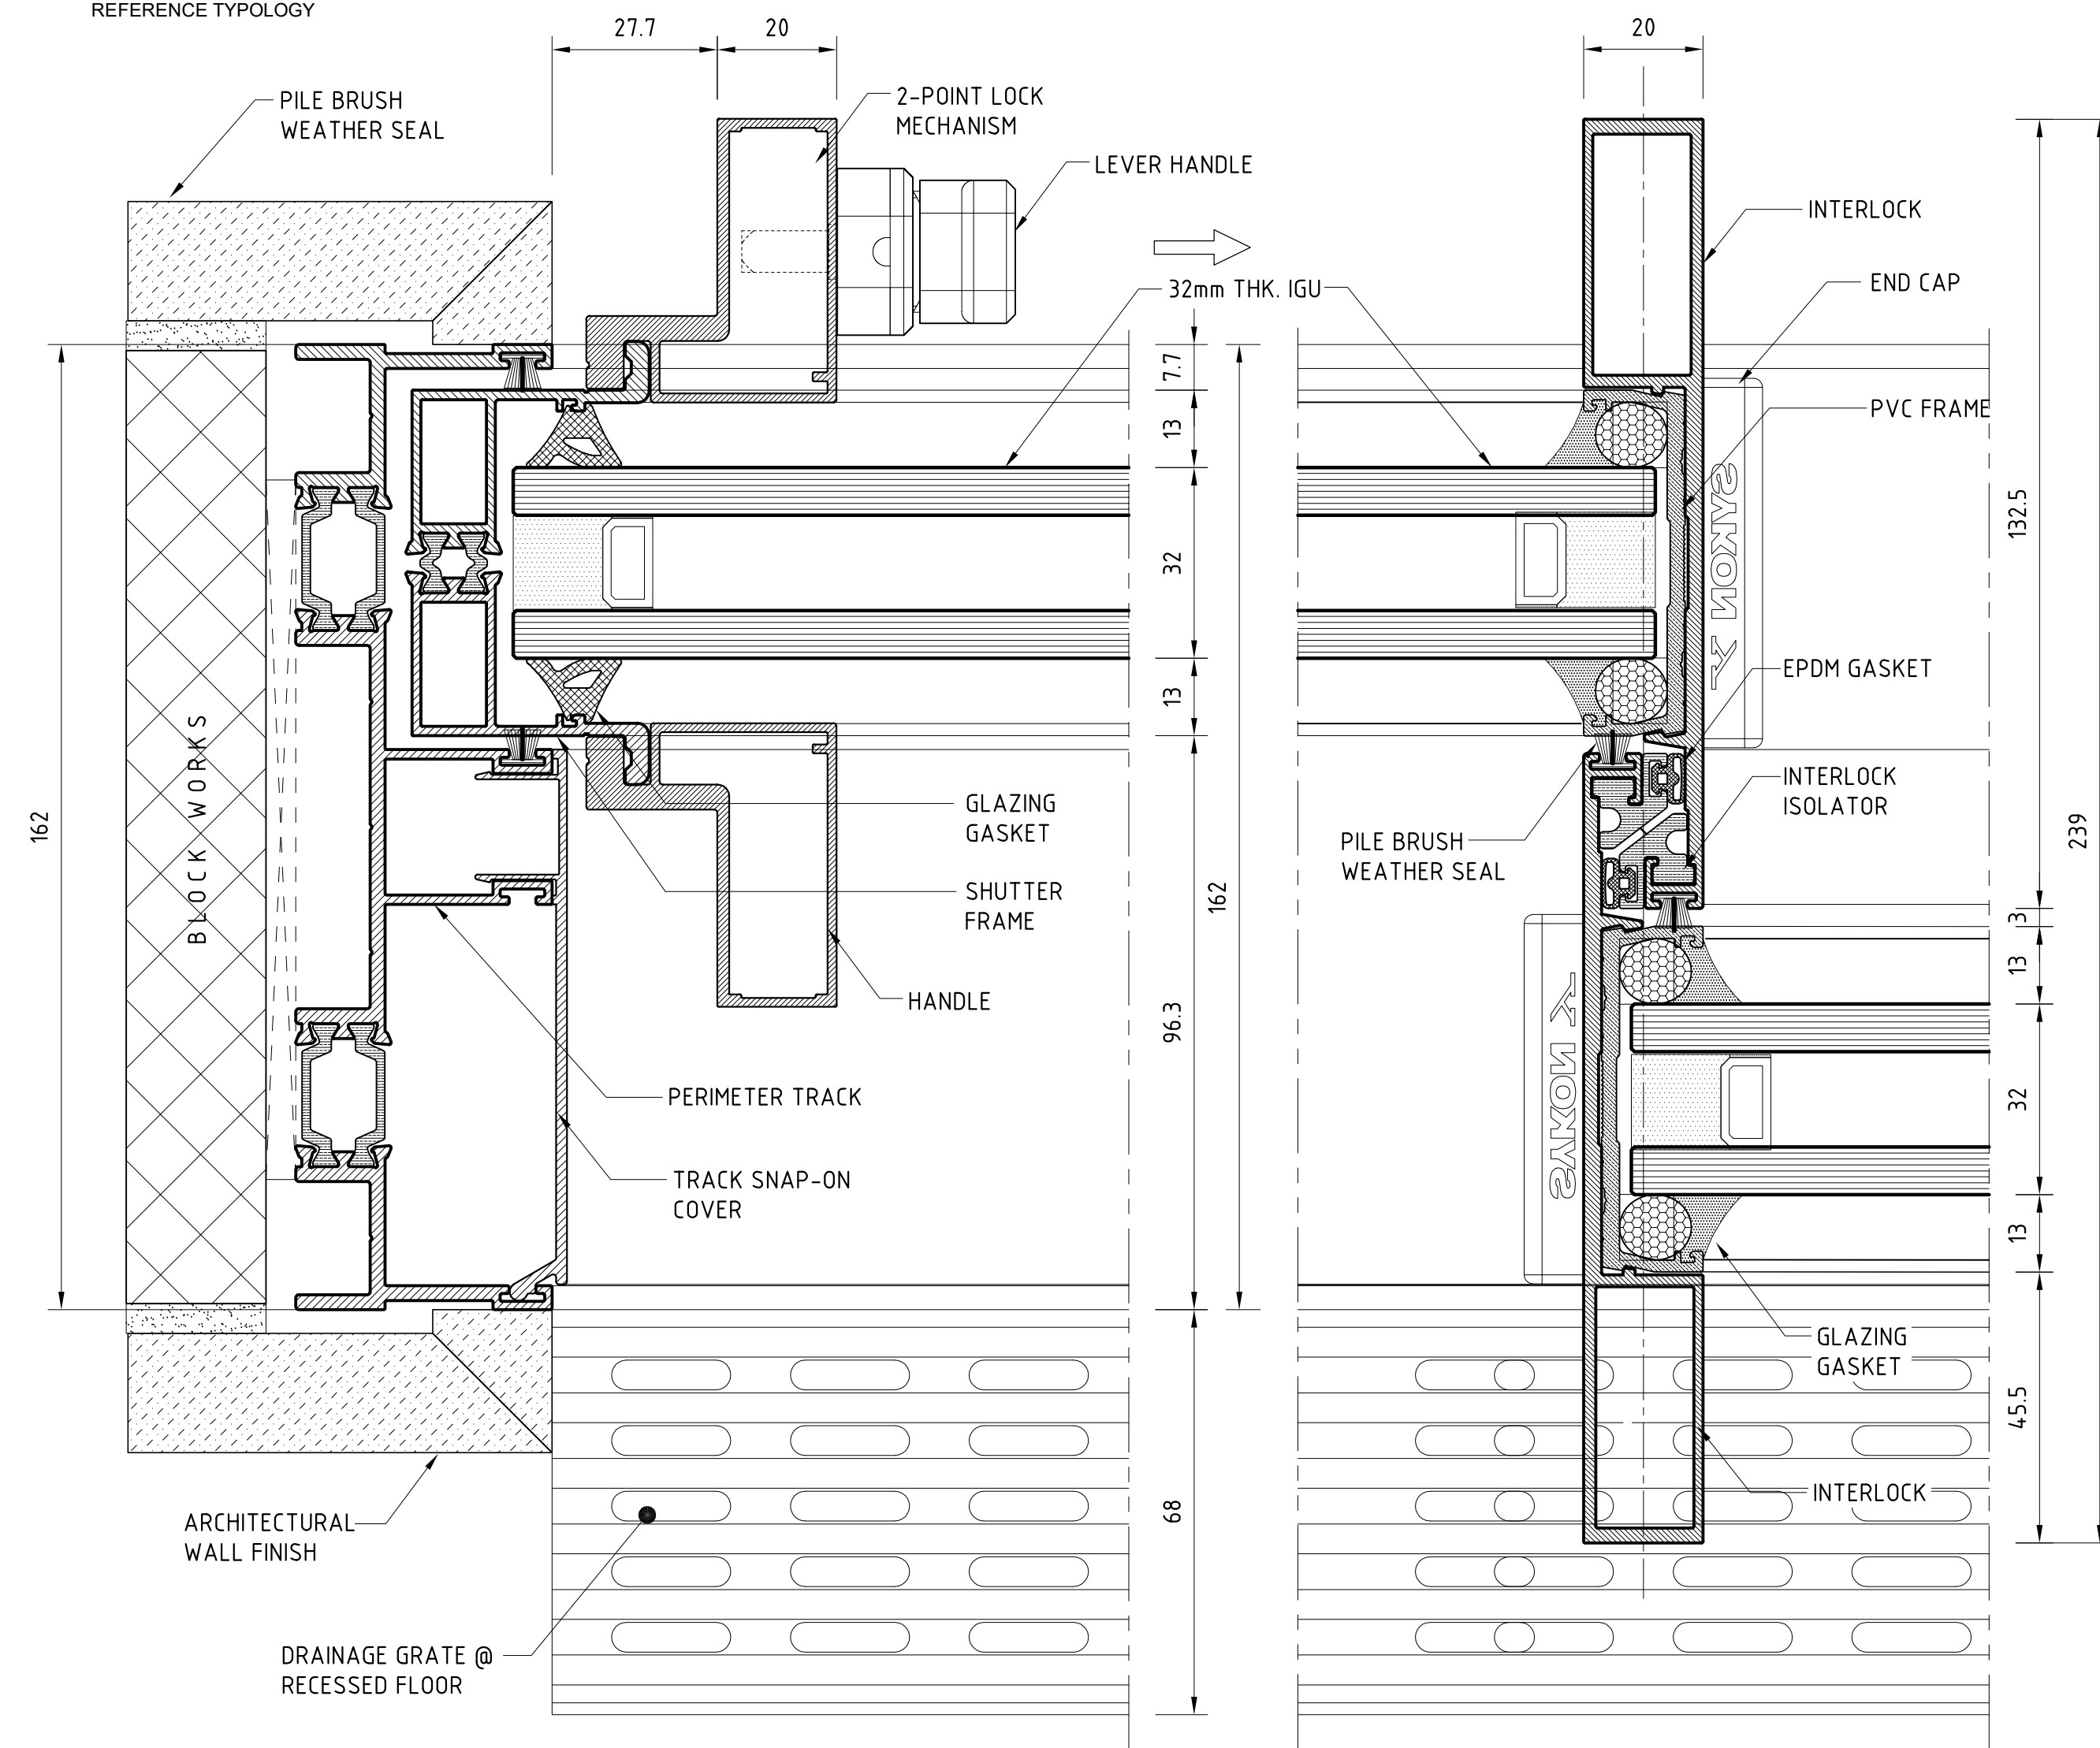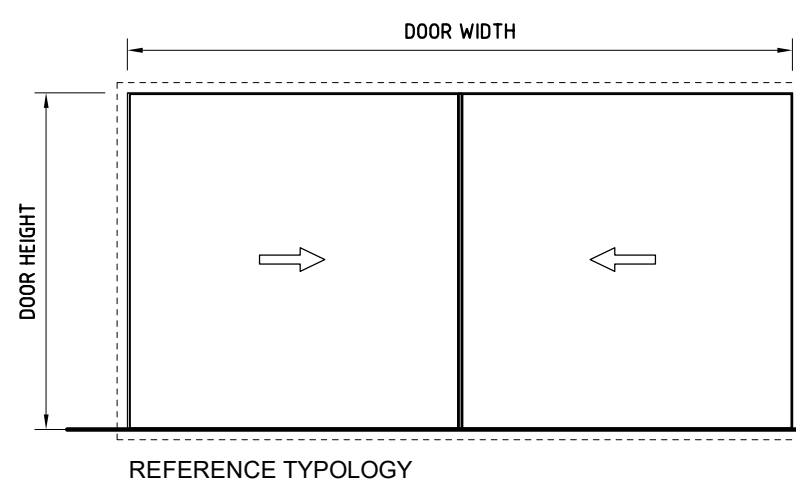


Project :

SL20 PANORAMIC SLIM SLIDERS TYPICAL DETAILS

Aluminum Fabricator :


020610
 SS SHOOT BOLT THREADED CONNECTOR

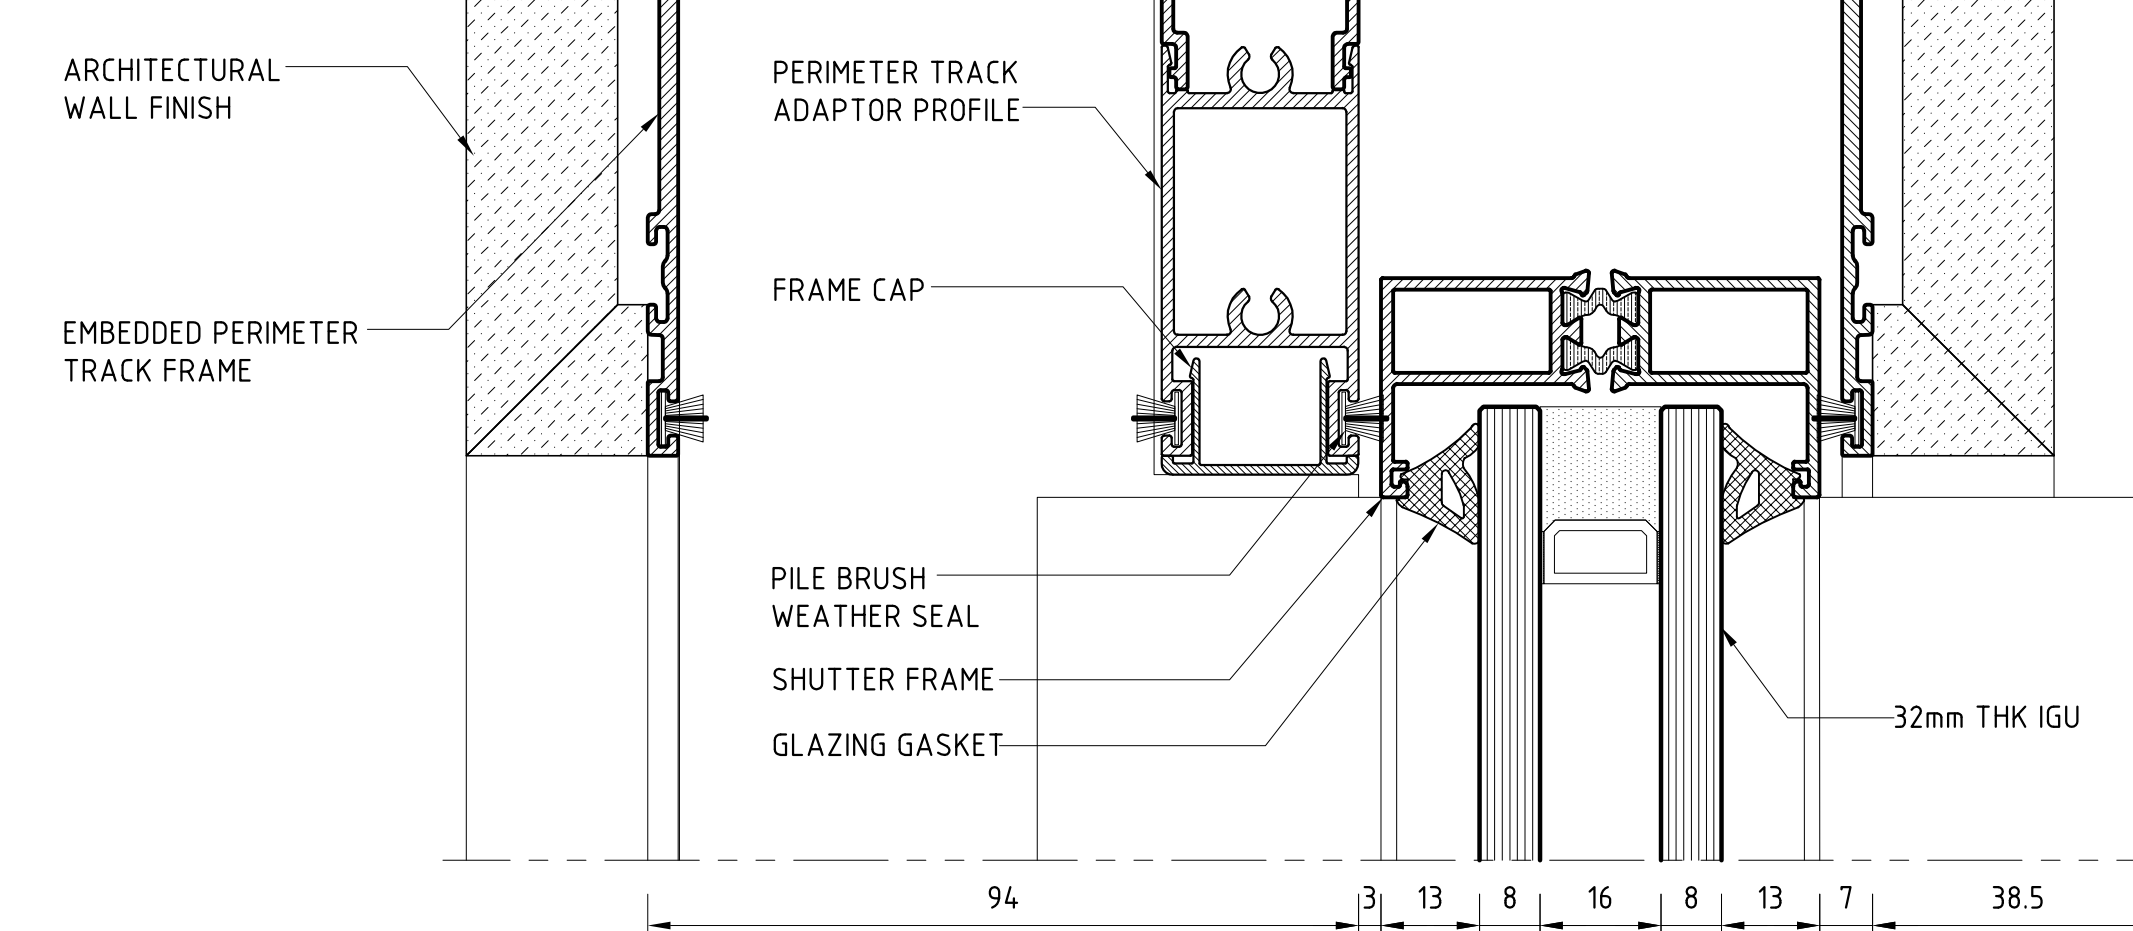

OUTSIDE

HEAD RAIL DETAIL

INSIDE

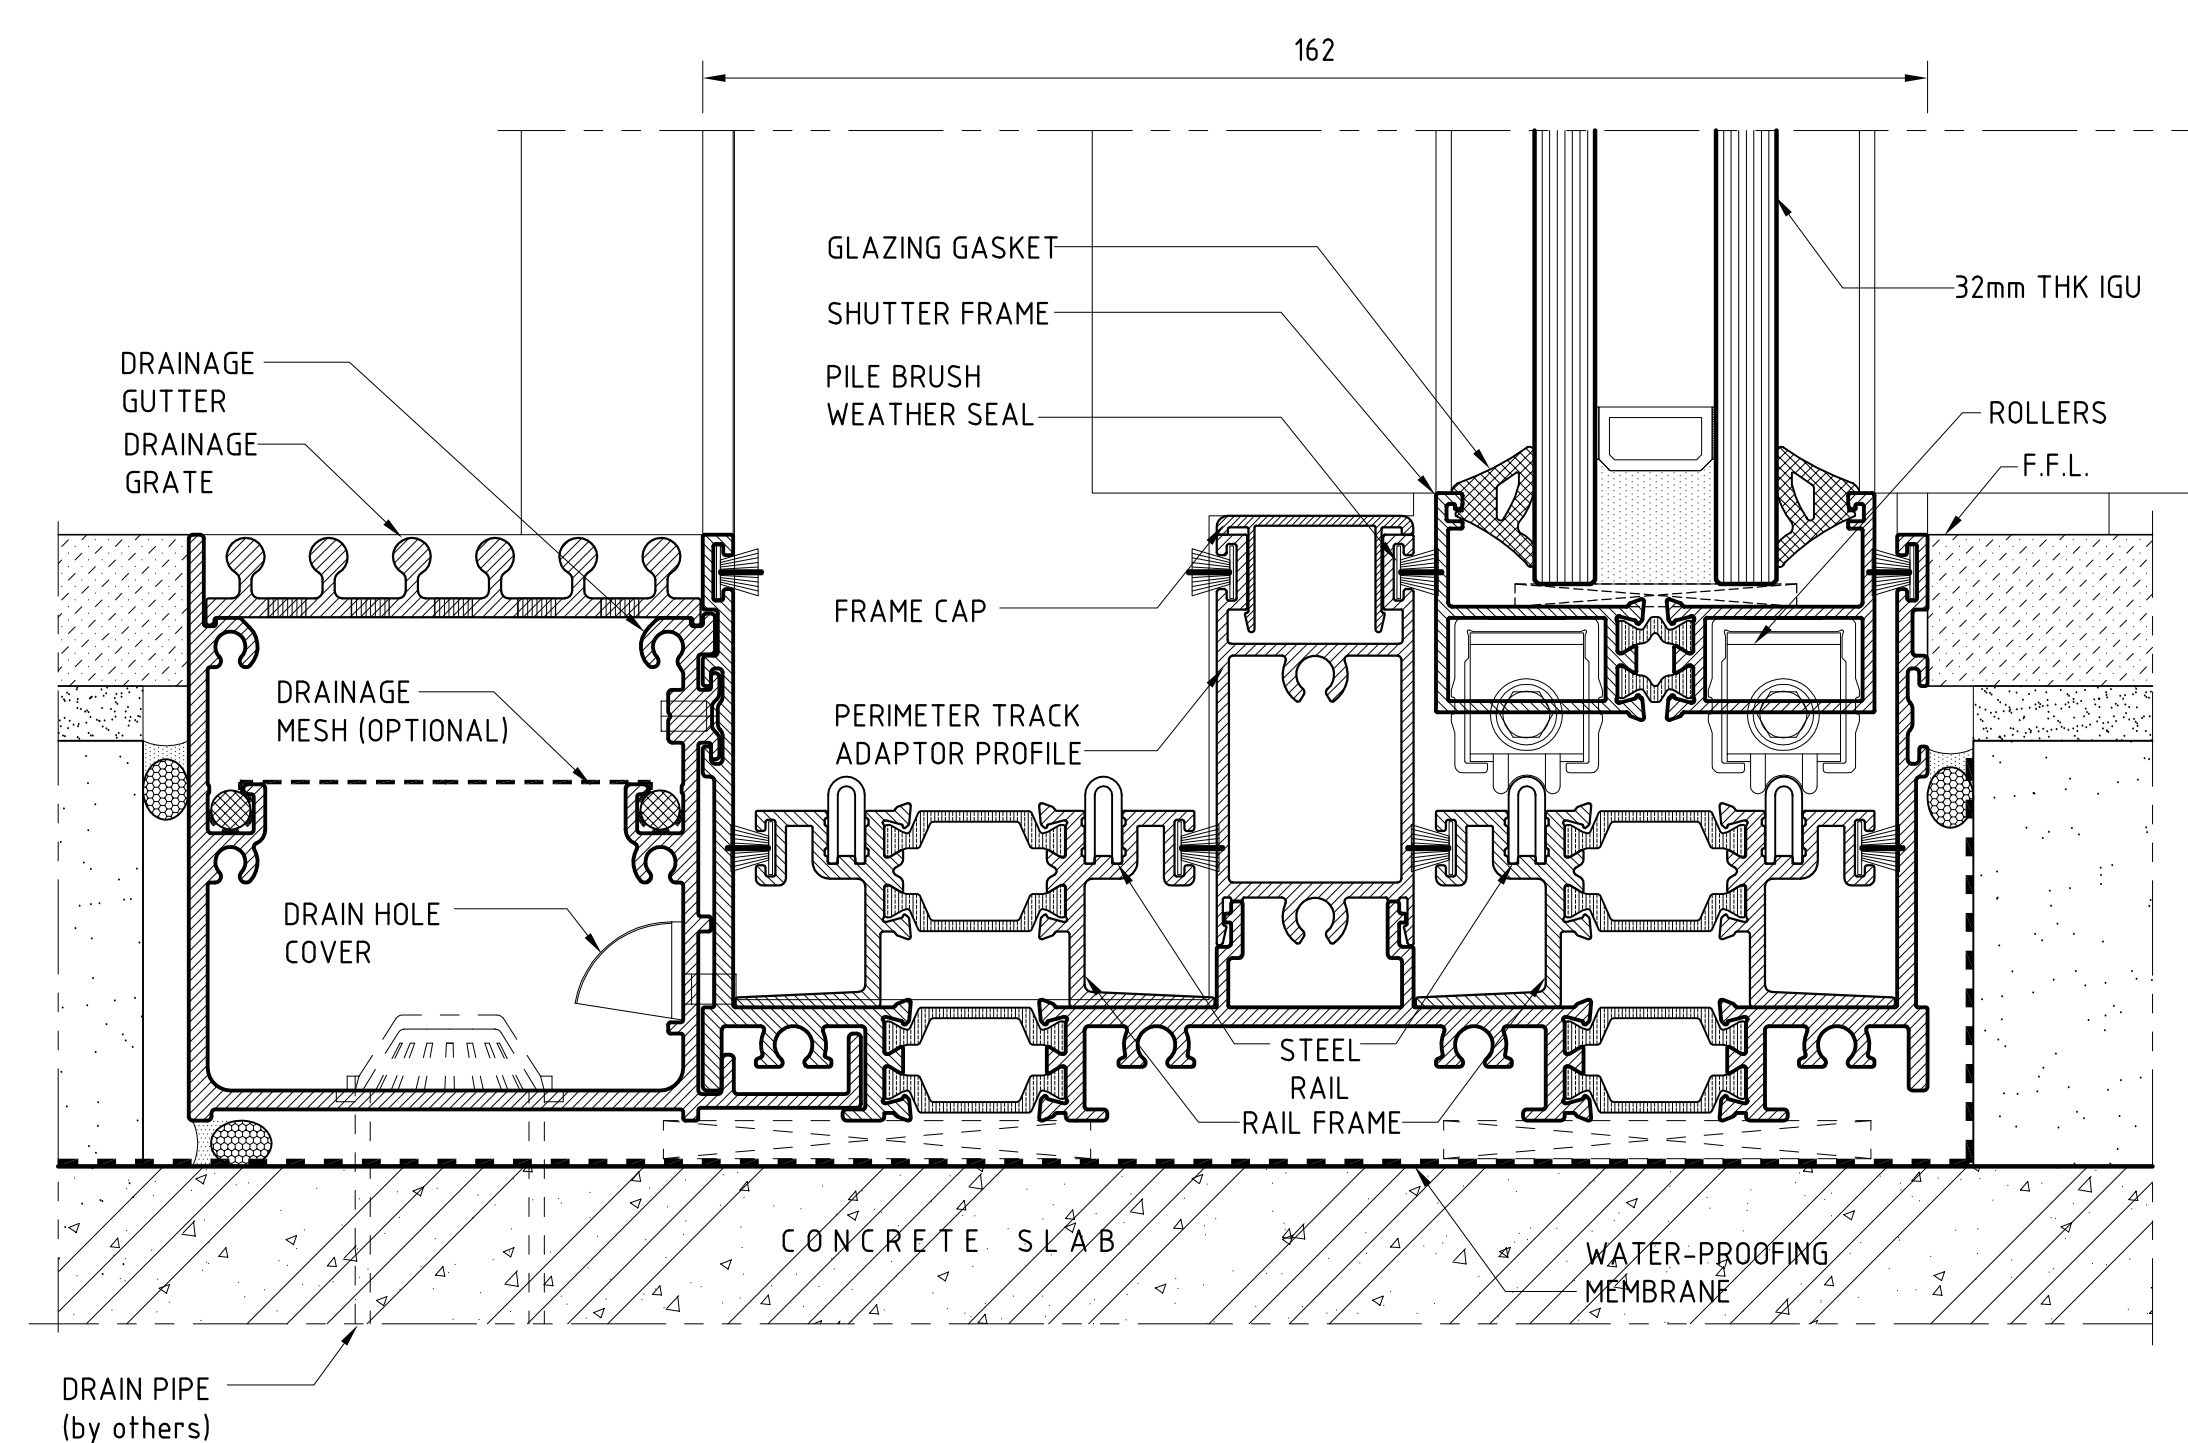

BOTTOM RAIL DETAIL

020611
 SS SHOOT BOLT TIP

