


SL 450

Lift & Slide Door System

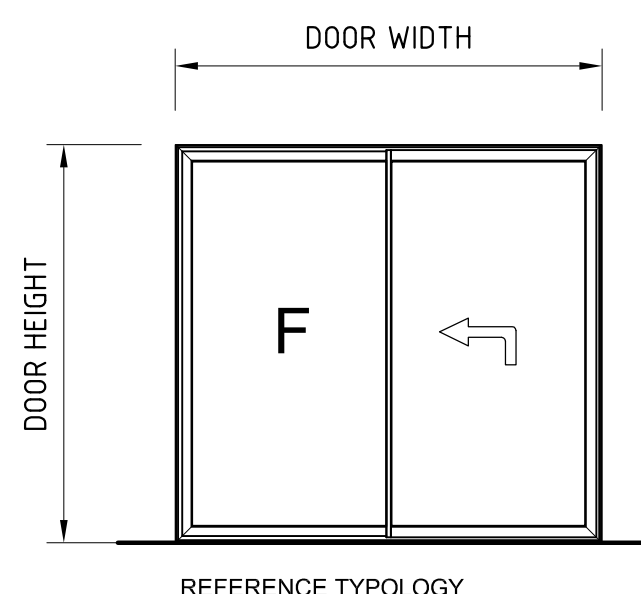

- **CERTIFICATIONS** as SLIDE ONLY NOT YET TESTED AS LIFT & SLIDE SYSTEM
- **AIR & WATER PERFORMANCE** WILL SIGNIFICANTLY BE BETTER FOR L&S

- Air infiltration & Exfiltration (ASTM E283/E283M-19) 300 Pa
- Water Penetration (ASTM E331-00 Reapproved 2016) 399 Pa
- Wind Resistance Serviceability (ASTM E330/E330M-14) 1920 Pa
- Wind Resistance Safety (ASTM E330/E330M-14) 3500 Pa
- Maximum Panel Weight up to 420 kg for Lift & Slide
- Single Lock Point or Multi-lock points can be used
- Maximum Glass Thickness that can be accommodated is 32mm

