




SL 450


Sliding Door System

Monorail

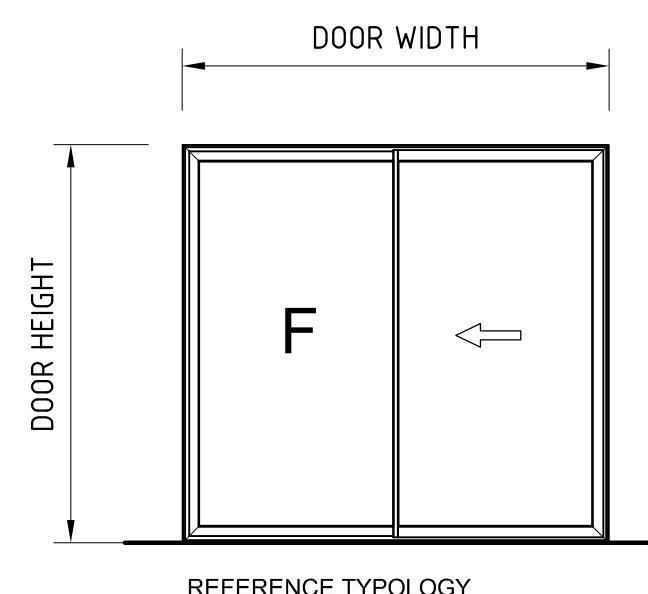

• **CERTIFICATIONS as SLIDE ONLY**

- Air Infiltration & Exfiltration (ASTM E283/E283M-19) 300 Pa
- Water Penetration (ASTM E331-00 Reapproved 2016) 399 Pa
- Wind Resistance Serviceability (ASTM E330/E330M-14) 1920 Pa
- Wind Resistance Safety (ASTM E330/E330M-14) 3500 Pa
- Maximum Panel Weight up to 300 kg
- Single Lock Point or Multi-lock points can be used
- Maximum Glass Thickness that can be accommodated is 32mm

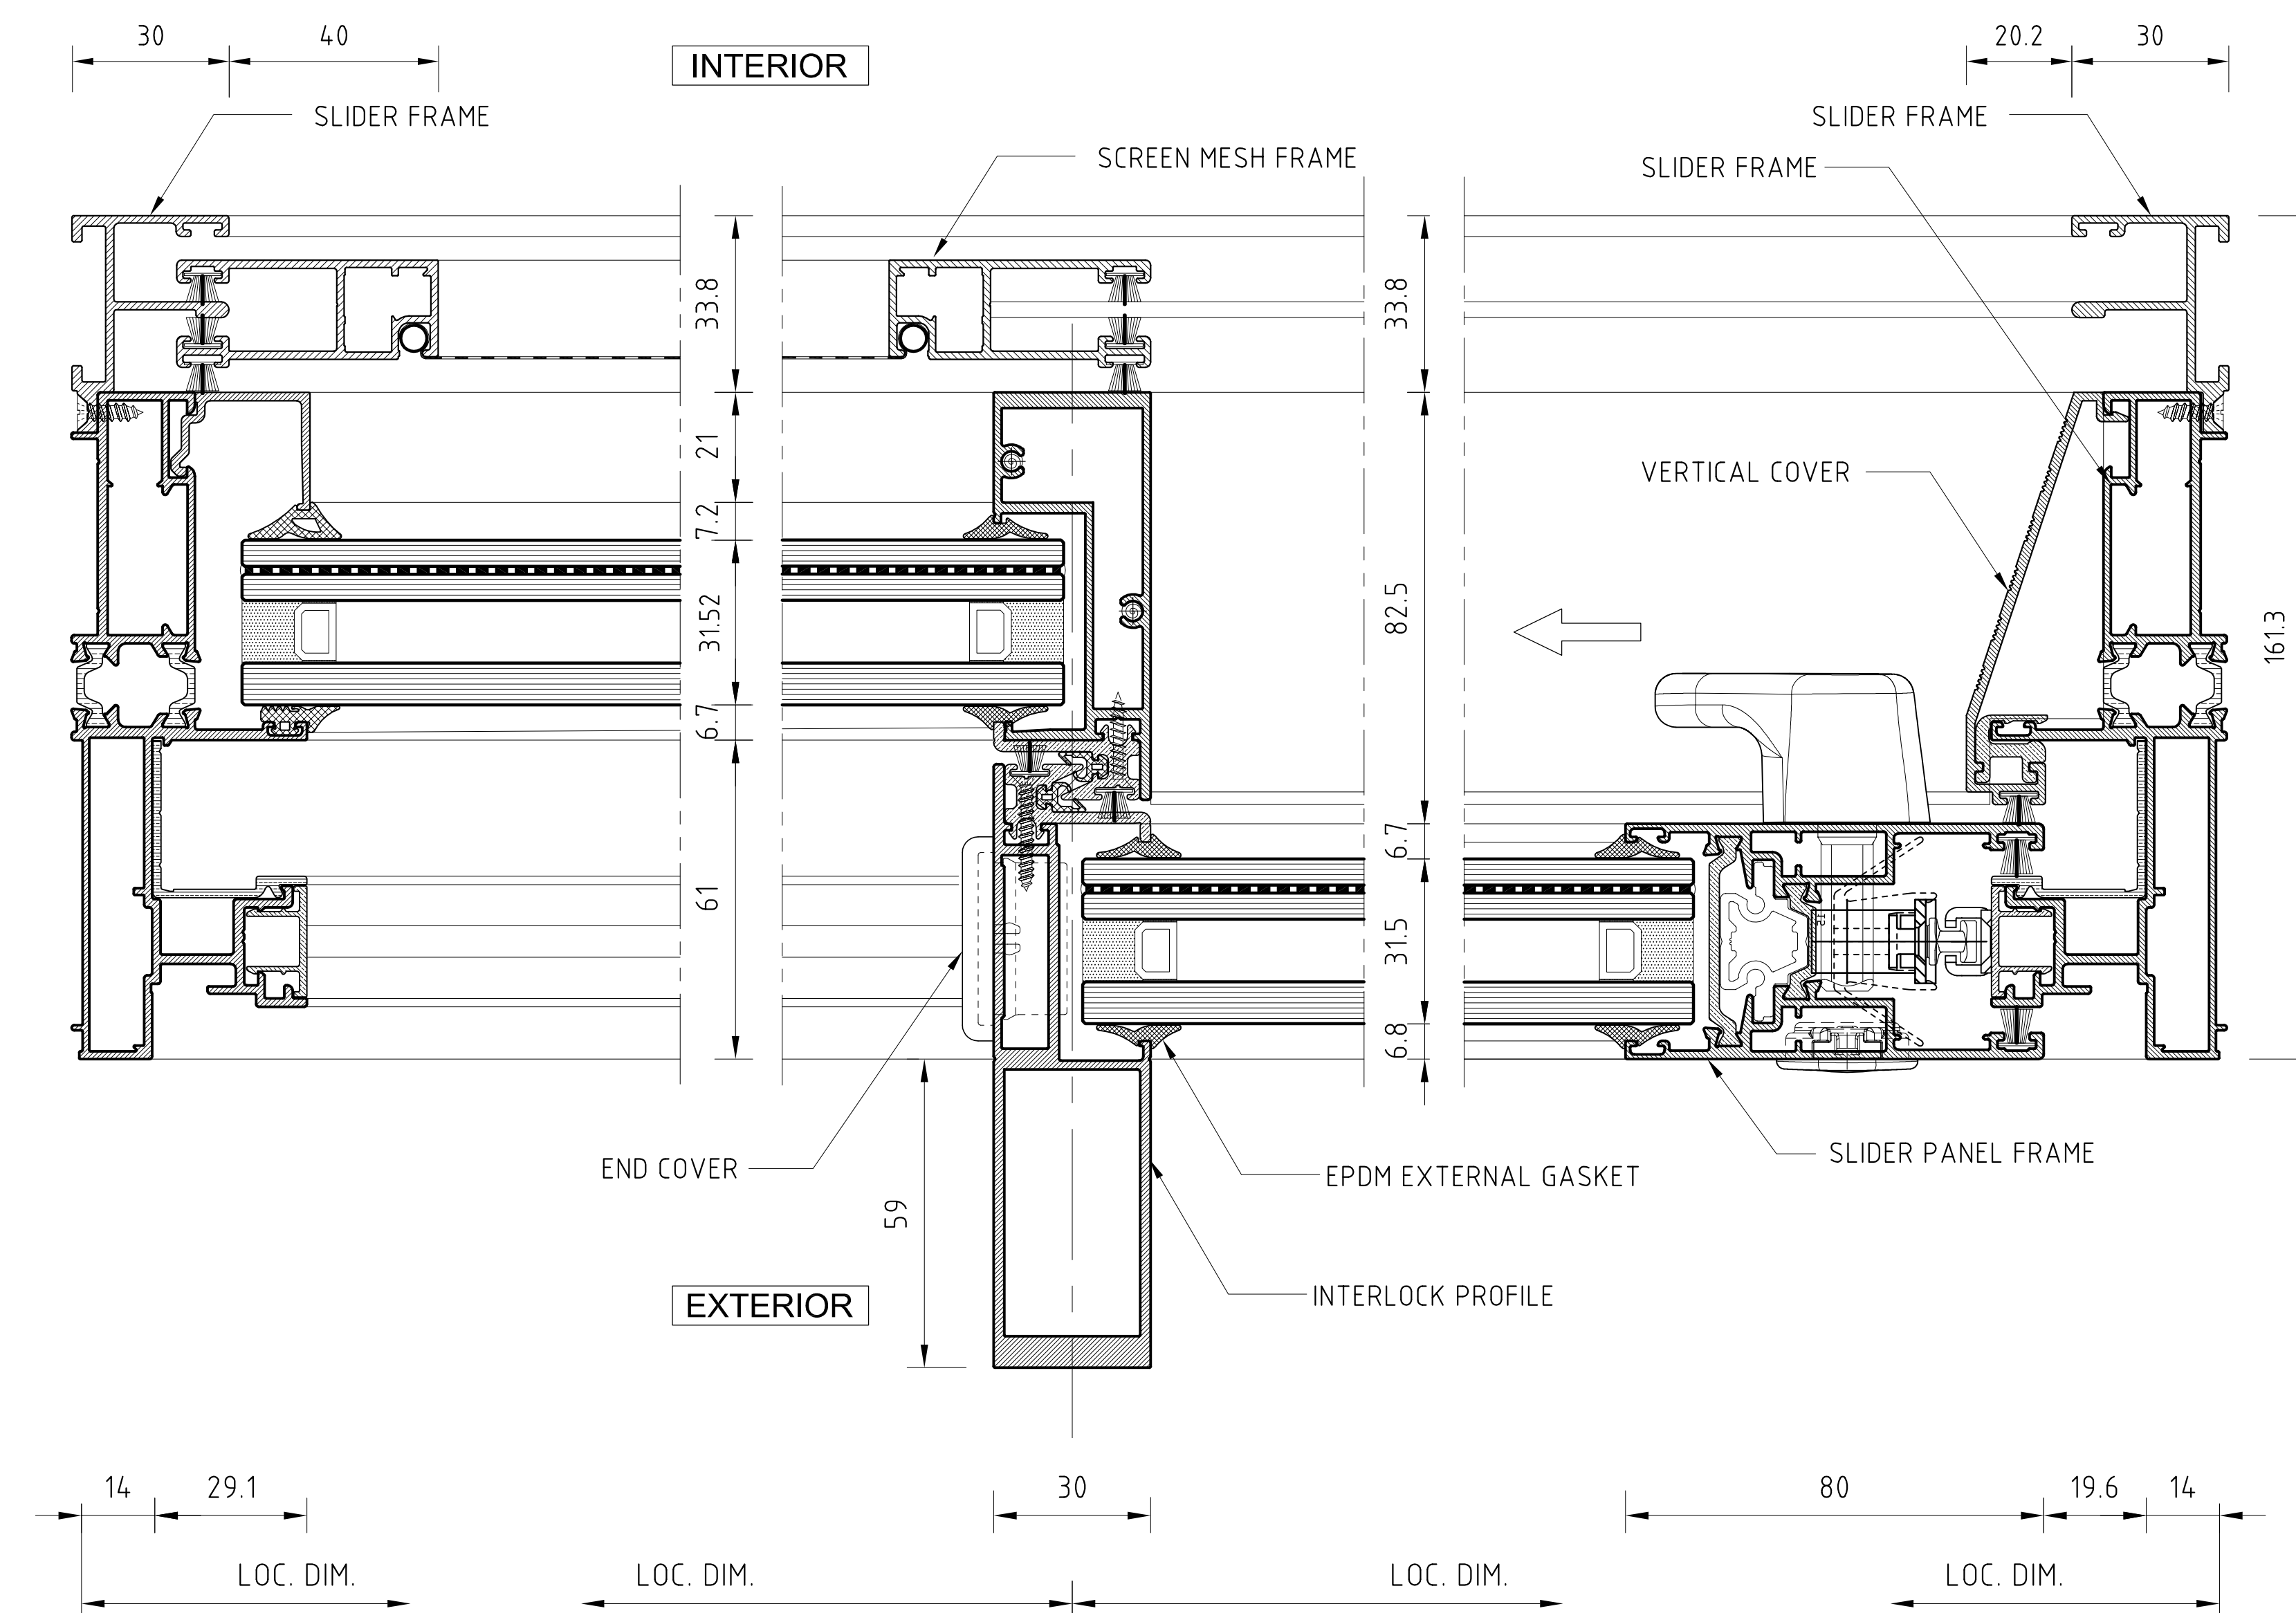

**JAMB DETAIL
FIXED SIDE**

**INTERLOCK
DETAIL**

**JAMB DETAIL
LOCK SIDE**

SL 450

Sliding Door System

Monorail

