



SL 450S

Sliding Door System

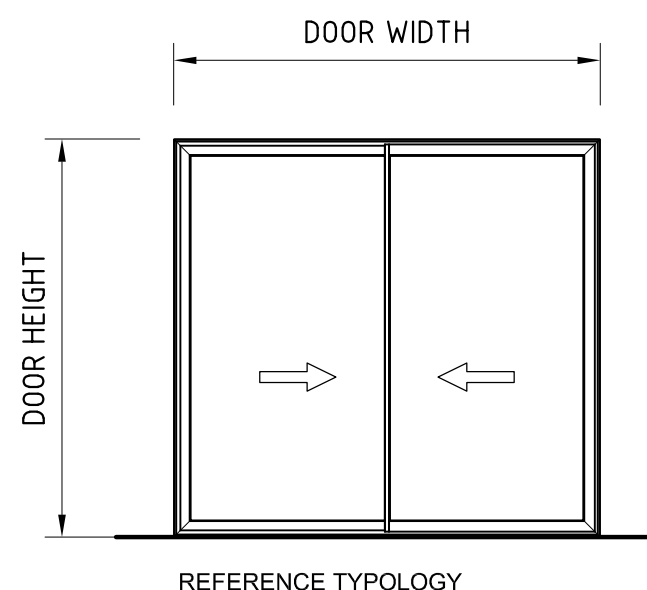


CERTIFICATIONS

- Air infiltration & Exfiltration (ASTM E283/E283M-19) 600 Pa
- Water Penetration (ASTM E331-00 Reapproved 2016) 600 Pa
- Wind Resistance Serviceability (ASTM E330/E330M-14) 1920 Pa
- Wind Resistance Safety (ASTM E330/E330M-14) 2880 Pa
- Maximum Panel Weight up to 200 kg
- Single Lock Point or Multi-lock points can be used
- Maximum Glass Thickness that can be accommodated is 28mm

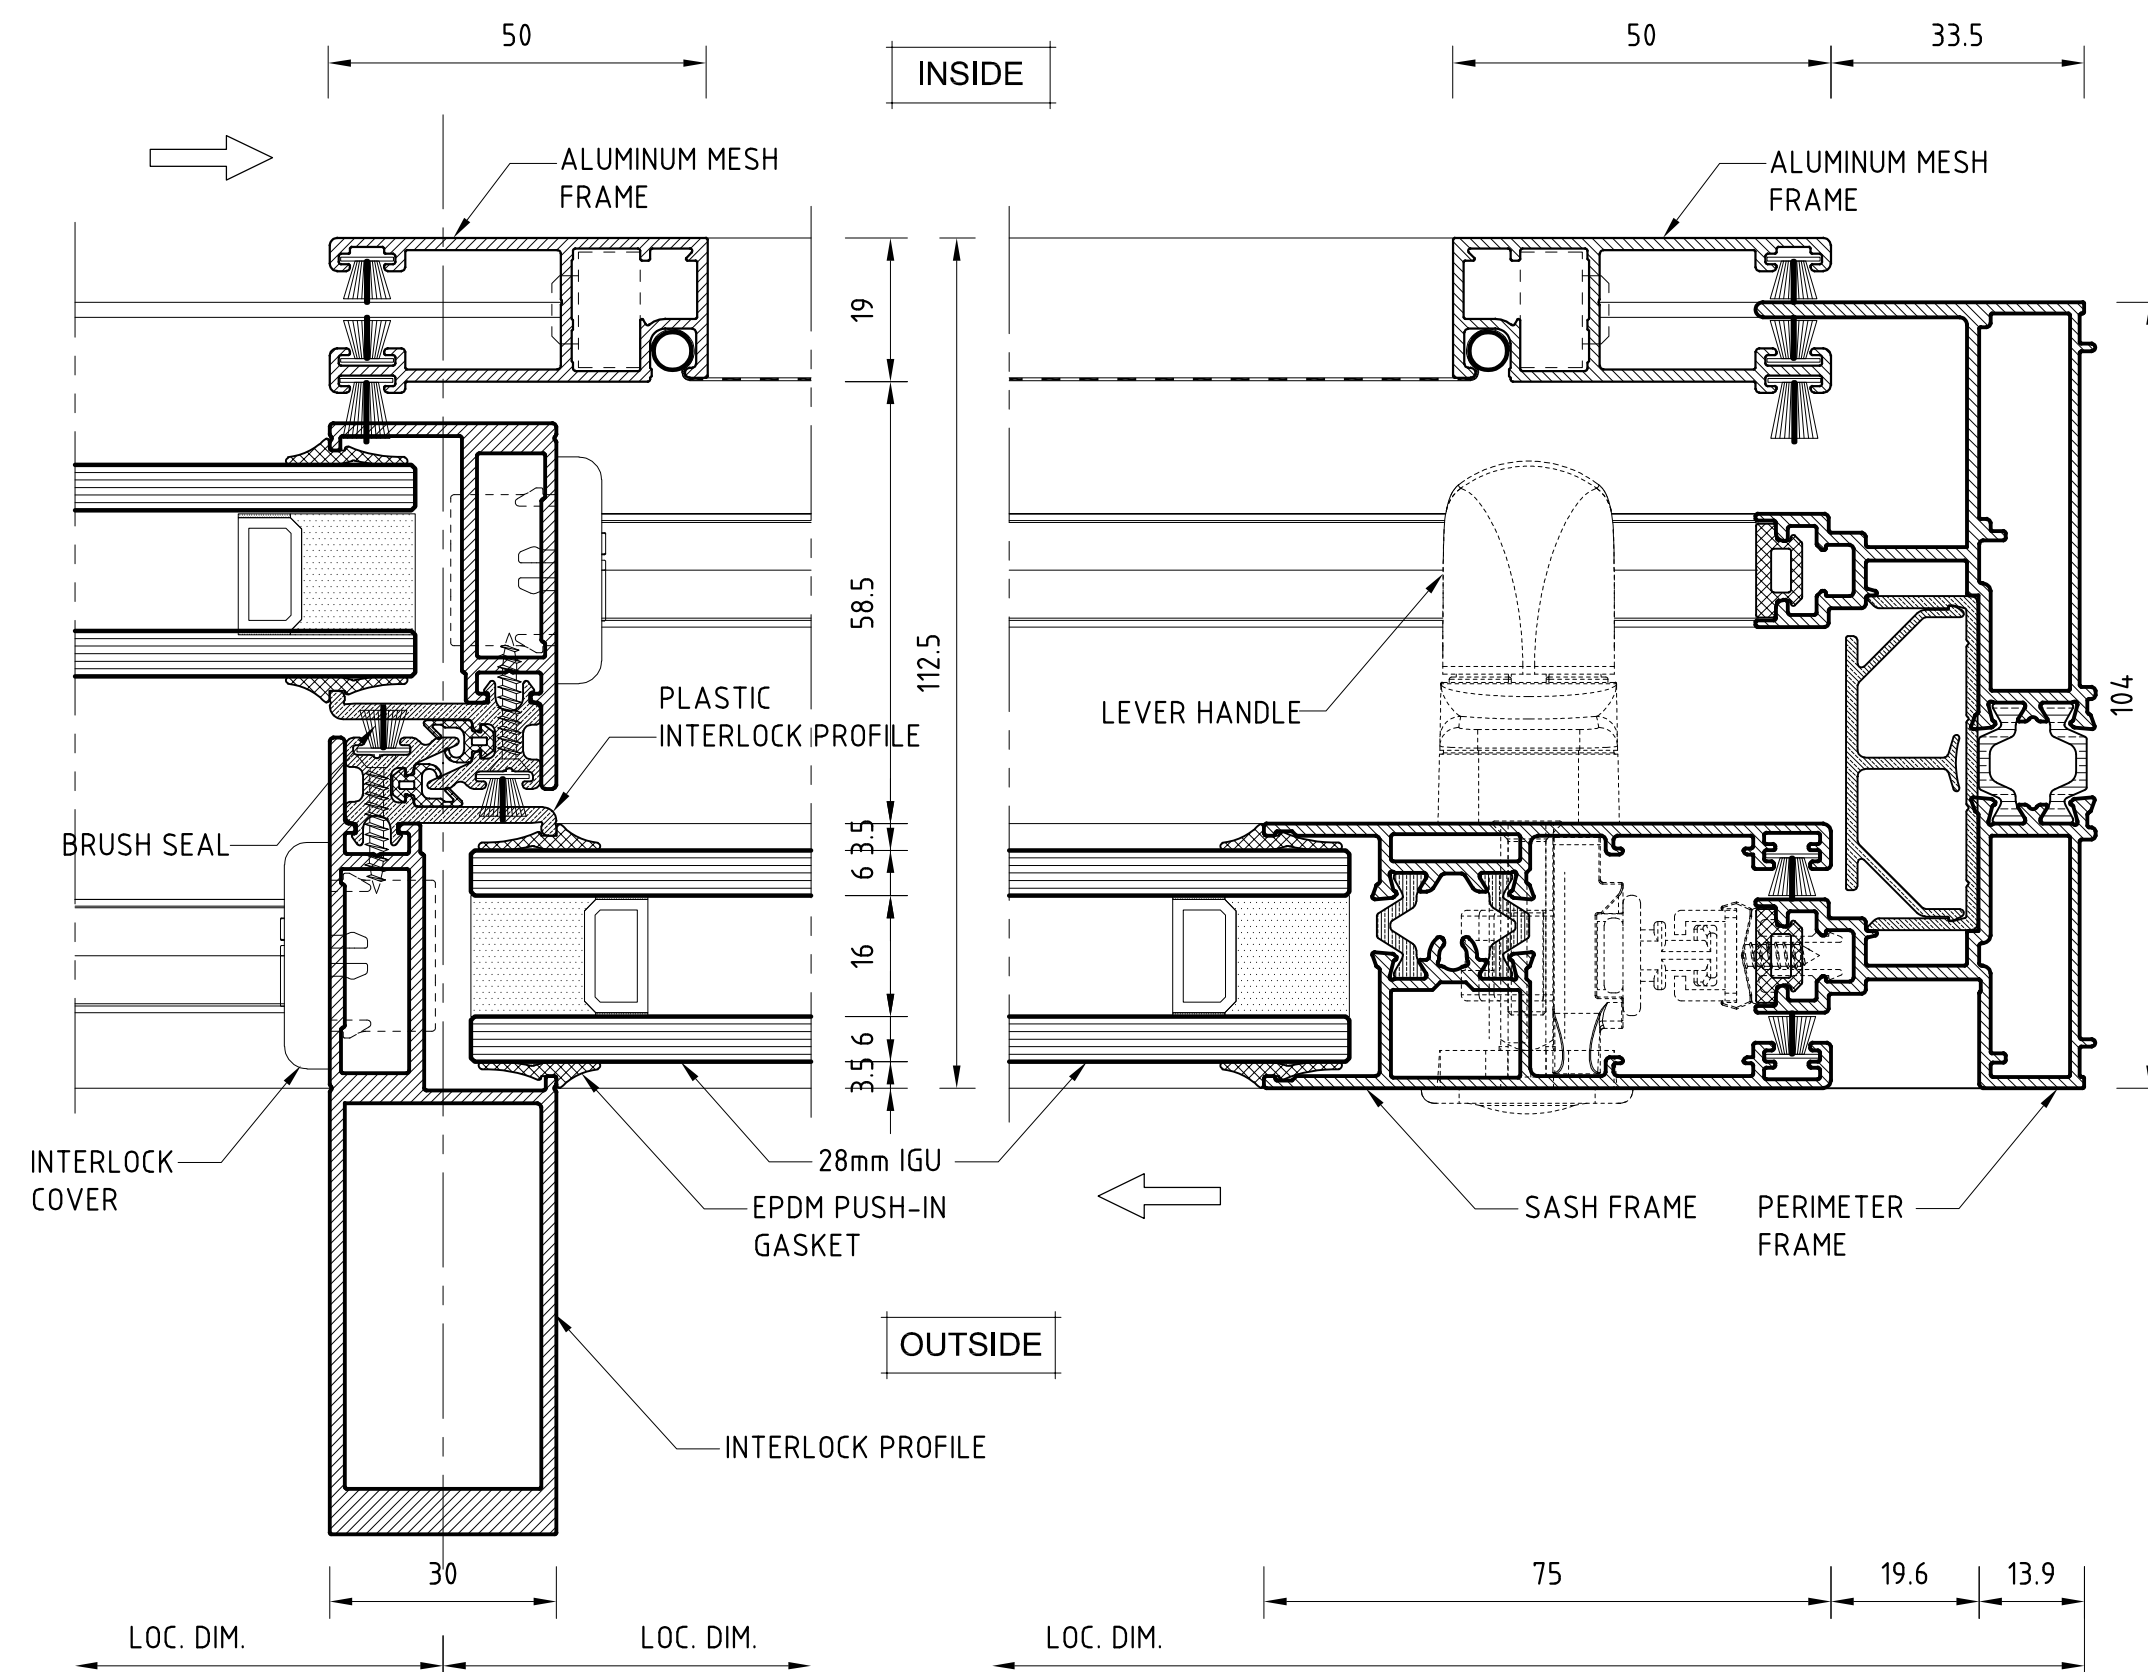


INTERLOCK DETAIL

JAMB DETAIL

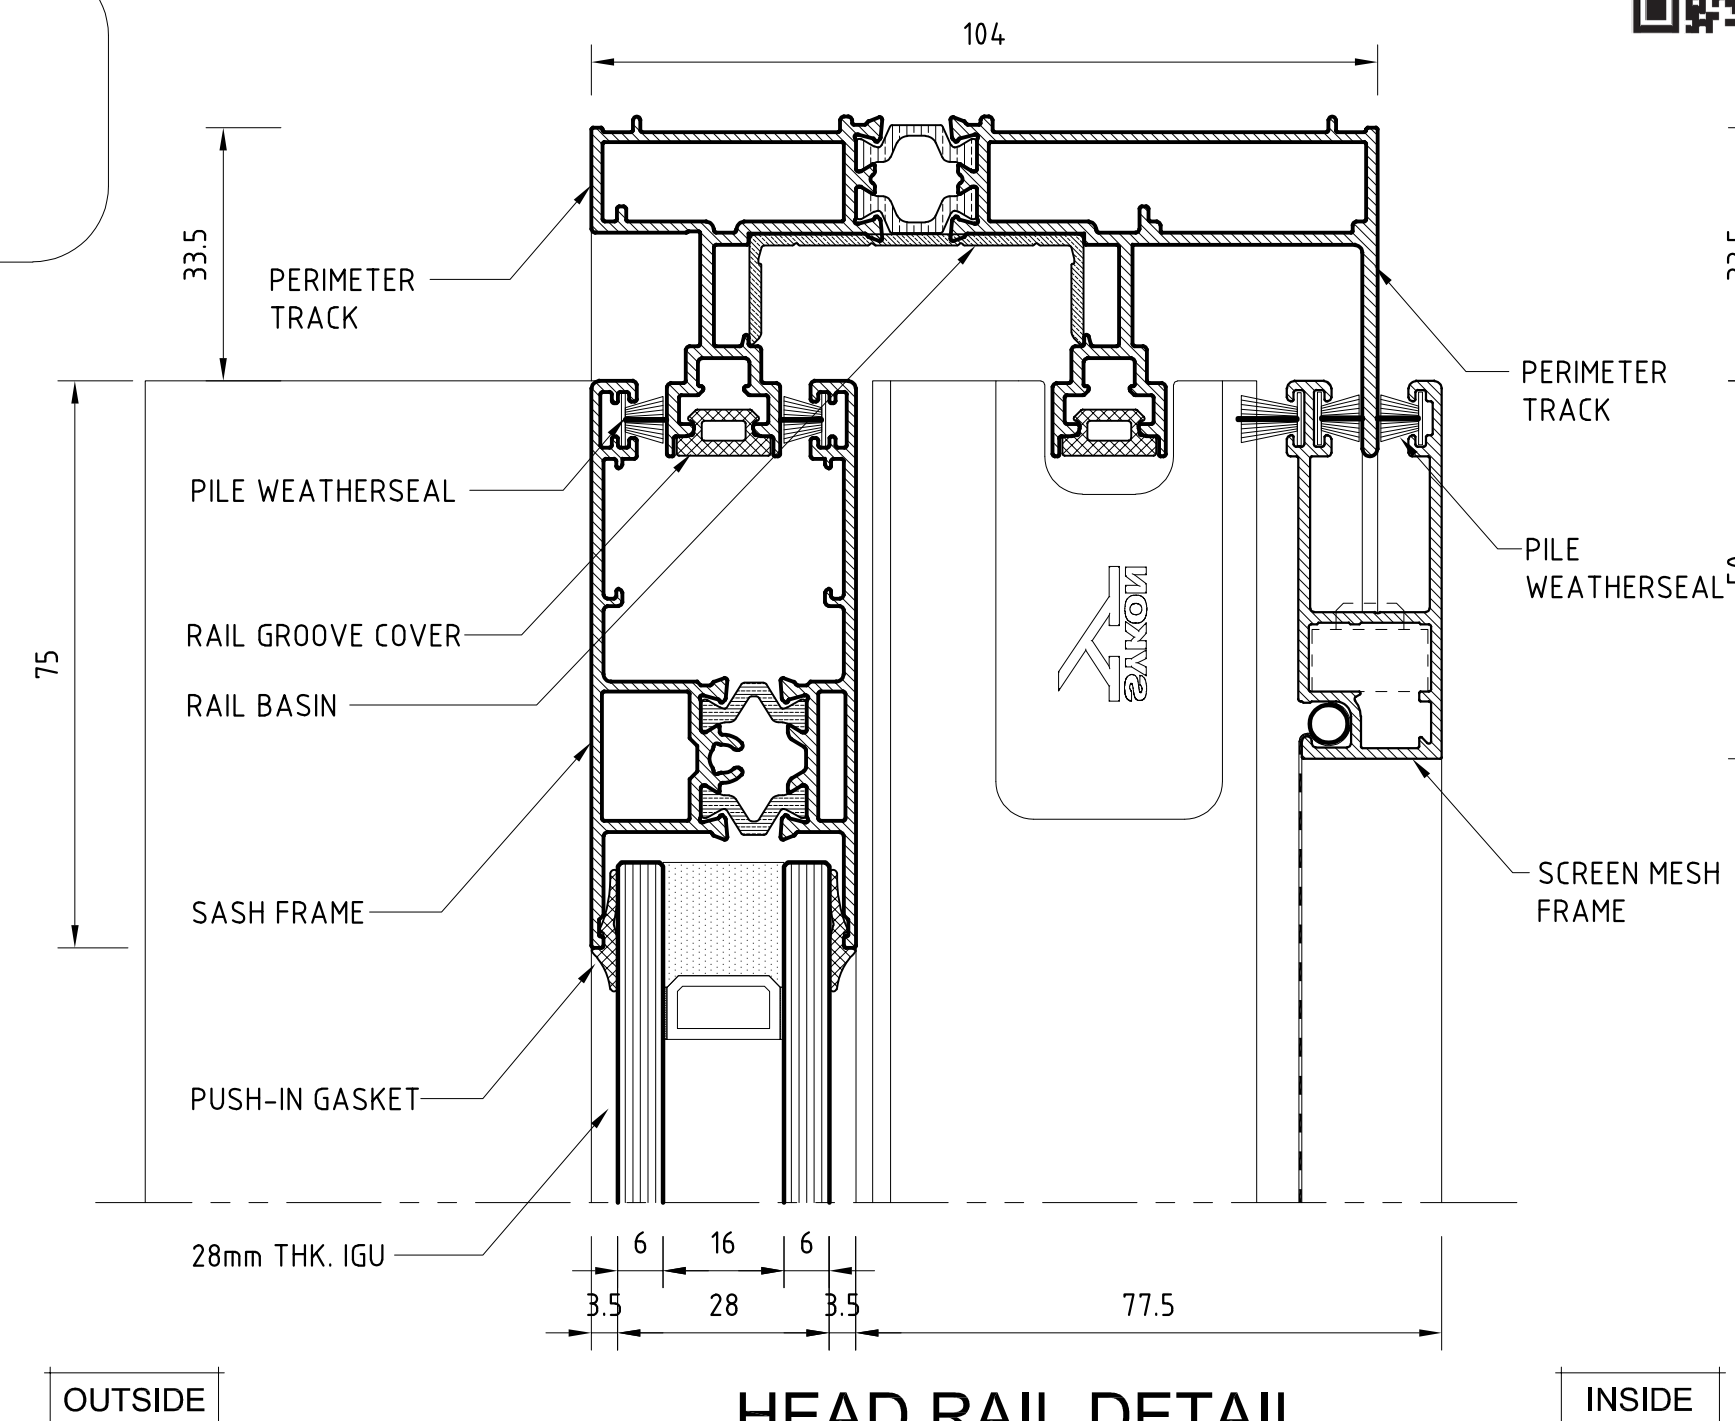

HEAD RAIL DETAIL

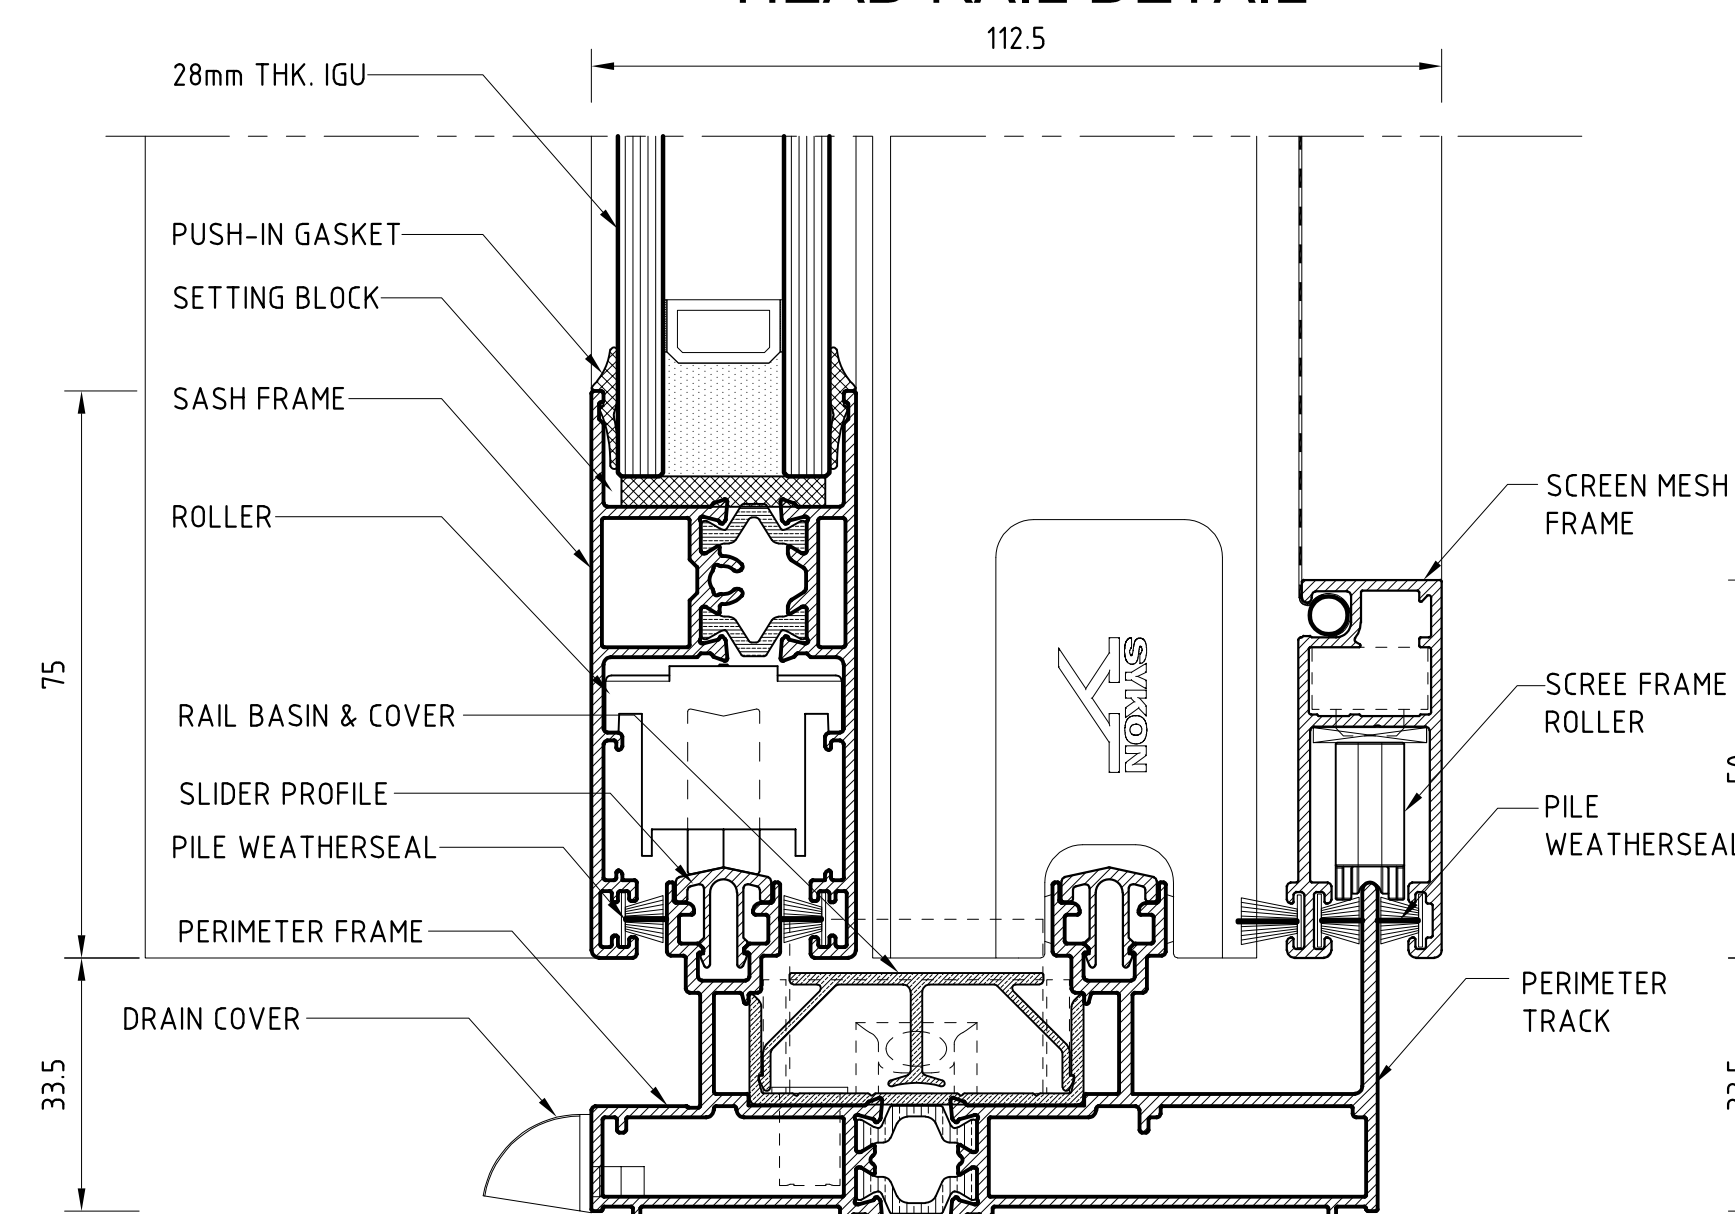

BOTTOM RAIL DETAIL