



SL 580

Sliding Door System

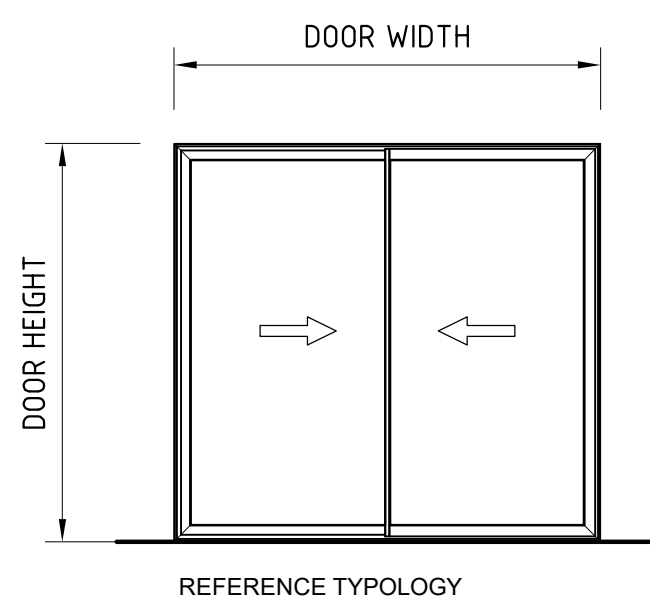

CERTIFICATIONS as LIFT & SLIDE

- Air Infiltration & Exfiltration (ASTM E283/E283M-19) 1000 Pa
- Water Penetration (ASTM E331-00 Reapproved 2016) 1200 Pa
- Wind Resistance Serviceability (ASTM E330/E330M-14) 1920 Pa
- Wind Resistance Safety (ASTM E330/E330M-14) 2880 Pa
- Maximum Panel Weight up to 400 kg
- Single Lock Point or Multi-lock points can be used
- Maximum Glass Thickness that can be accommodated is 42mm

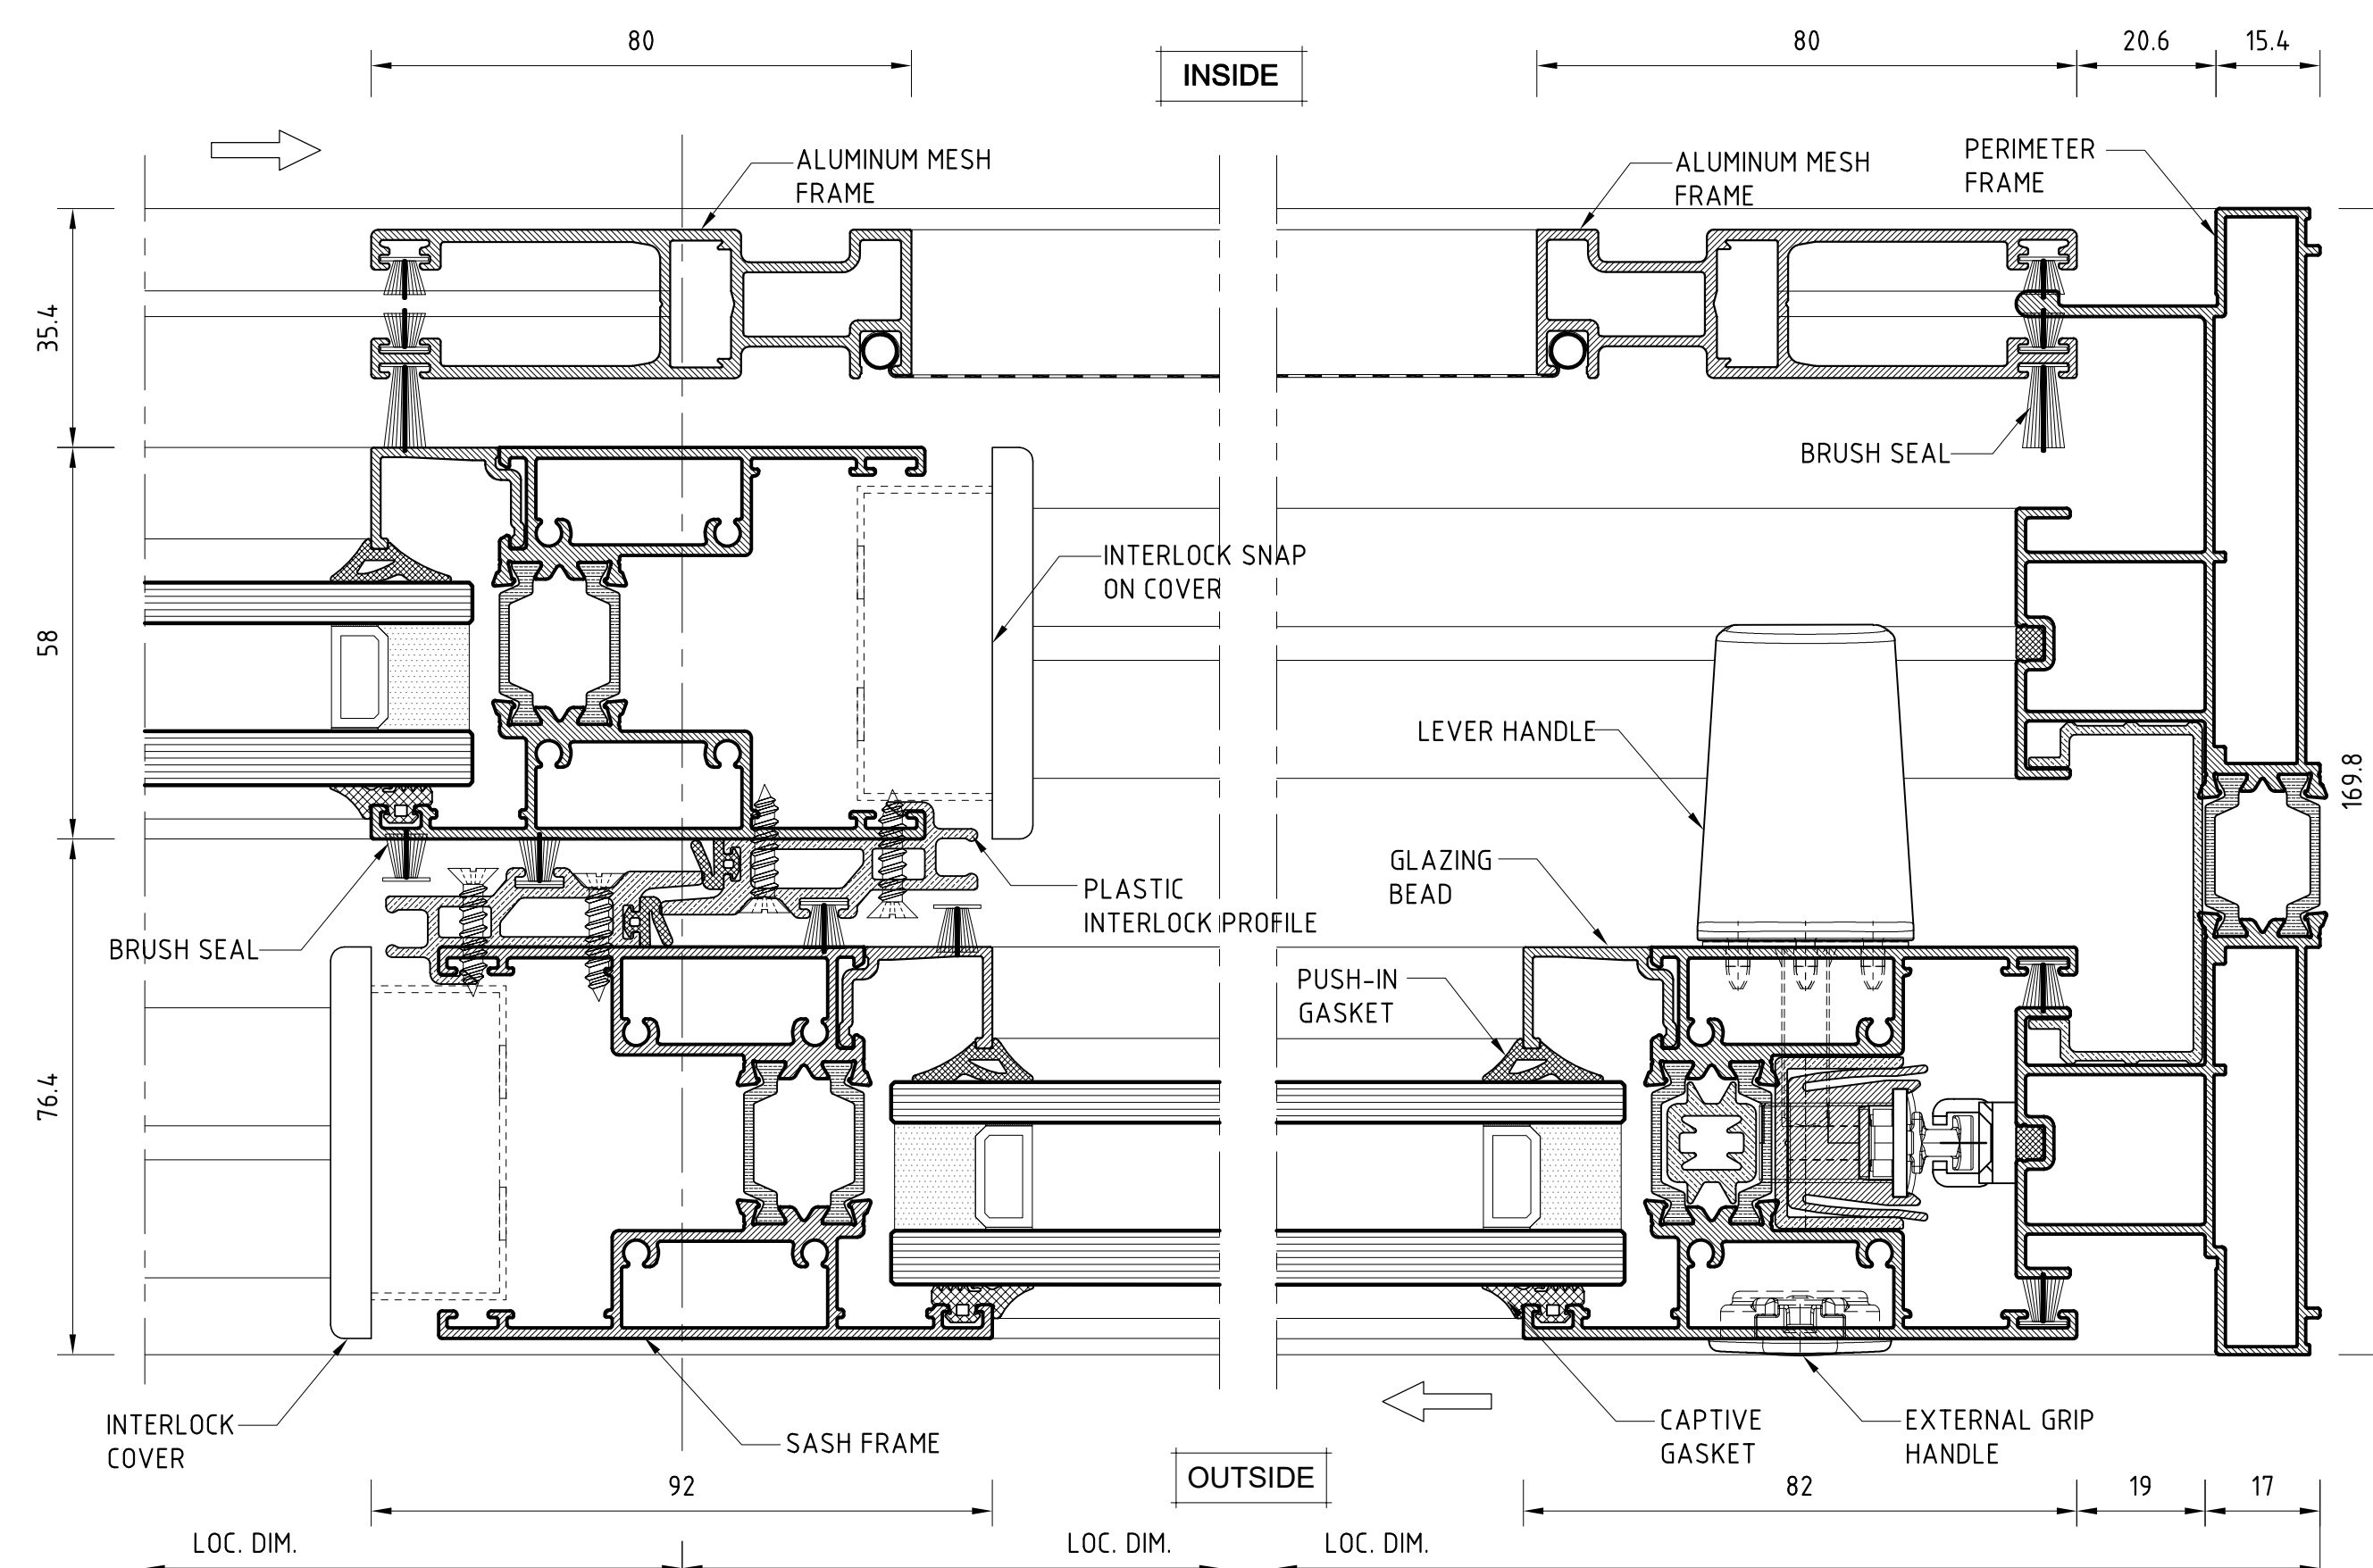

INTERLOCK DETAIL

JAMB DETAIL

G 2021
RAIL COVER GASKET

PP 2022
INTERLOCK CLIP

G 1030
GLAZING GASKET

G 2022
INTERLOCK GASKET

PP 2026
PVC REINFORCEMENT

CS 202 446
TOP CENTRAL SEAL

G2050
WEDGE GASKET FOR 5mm

PP 2020
SASH ADAPTOR

WP 06
WEATHER PILE 6mm

WP 07
WEATHER PILE 8mm

PP 2021
RAIL BASIN

CS 900 460
BOTTOM CENTRAL SEAL

EC 580 500
INTERLOCK COVER ASSEMBLY

2145
DRAIN COVER w/ VALVE

2145
DRAIN COVER w/ VALVE

7061
SCREEN FRAME ROLLER

P010300
CORNER CLEAT 30mm

P010100
CORNER CLEAT 10mm

Project :

SL580 SLIDER SYSTEM TYPICAL DETAILS

Aluminum Fabricator :

