



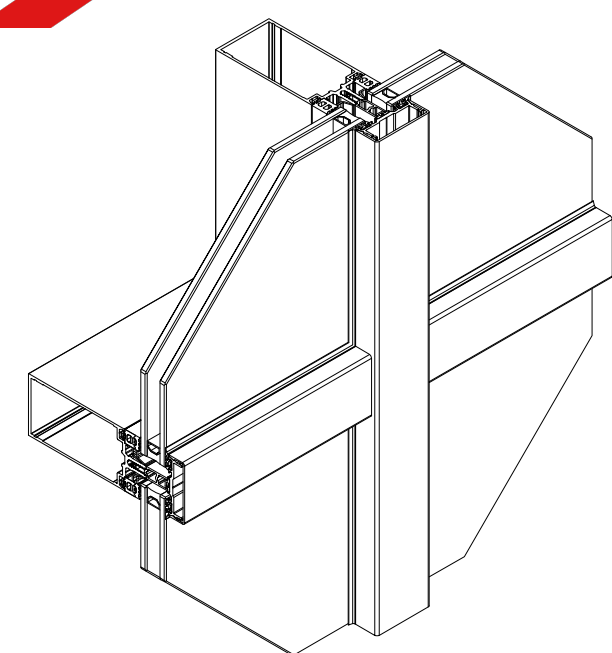


CERTIFICATIONS



- | | |
|--|---------|
| • Air infiltration & Exfiltration (ASTM E283/E283M-19) | 600 Pa |
| • Water Penetration (ASTM E331-00 Reapproved 2016) | 1200 Pa |
| • Wind Resistance Serviceability (ASTM E330/E330M-14) | 1760 Pa |
| • Wind Resistance Safety (ASTM E330/E330M-14) | 3000 Pa |

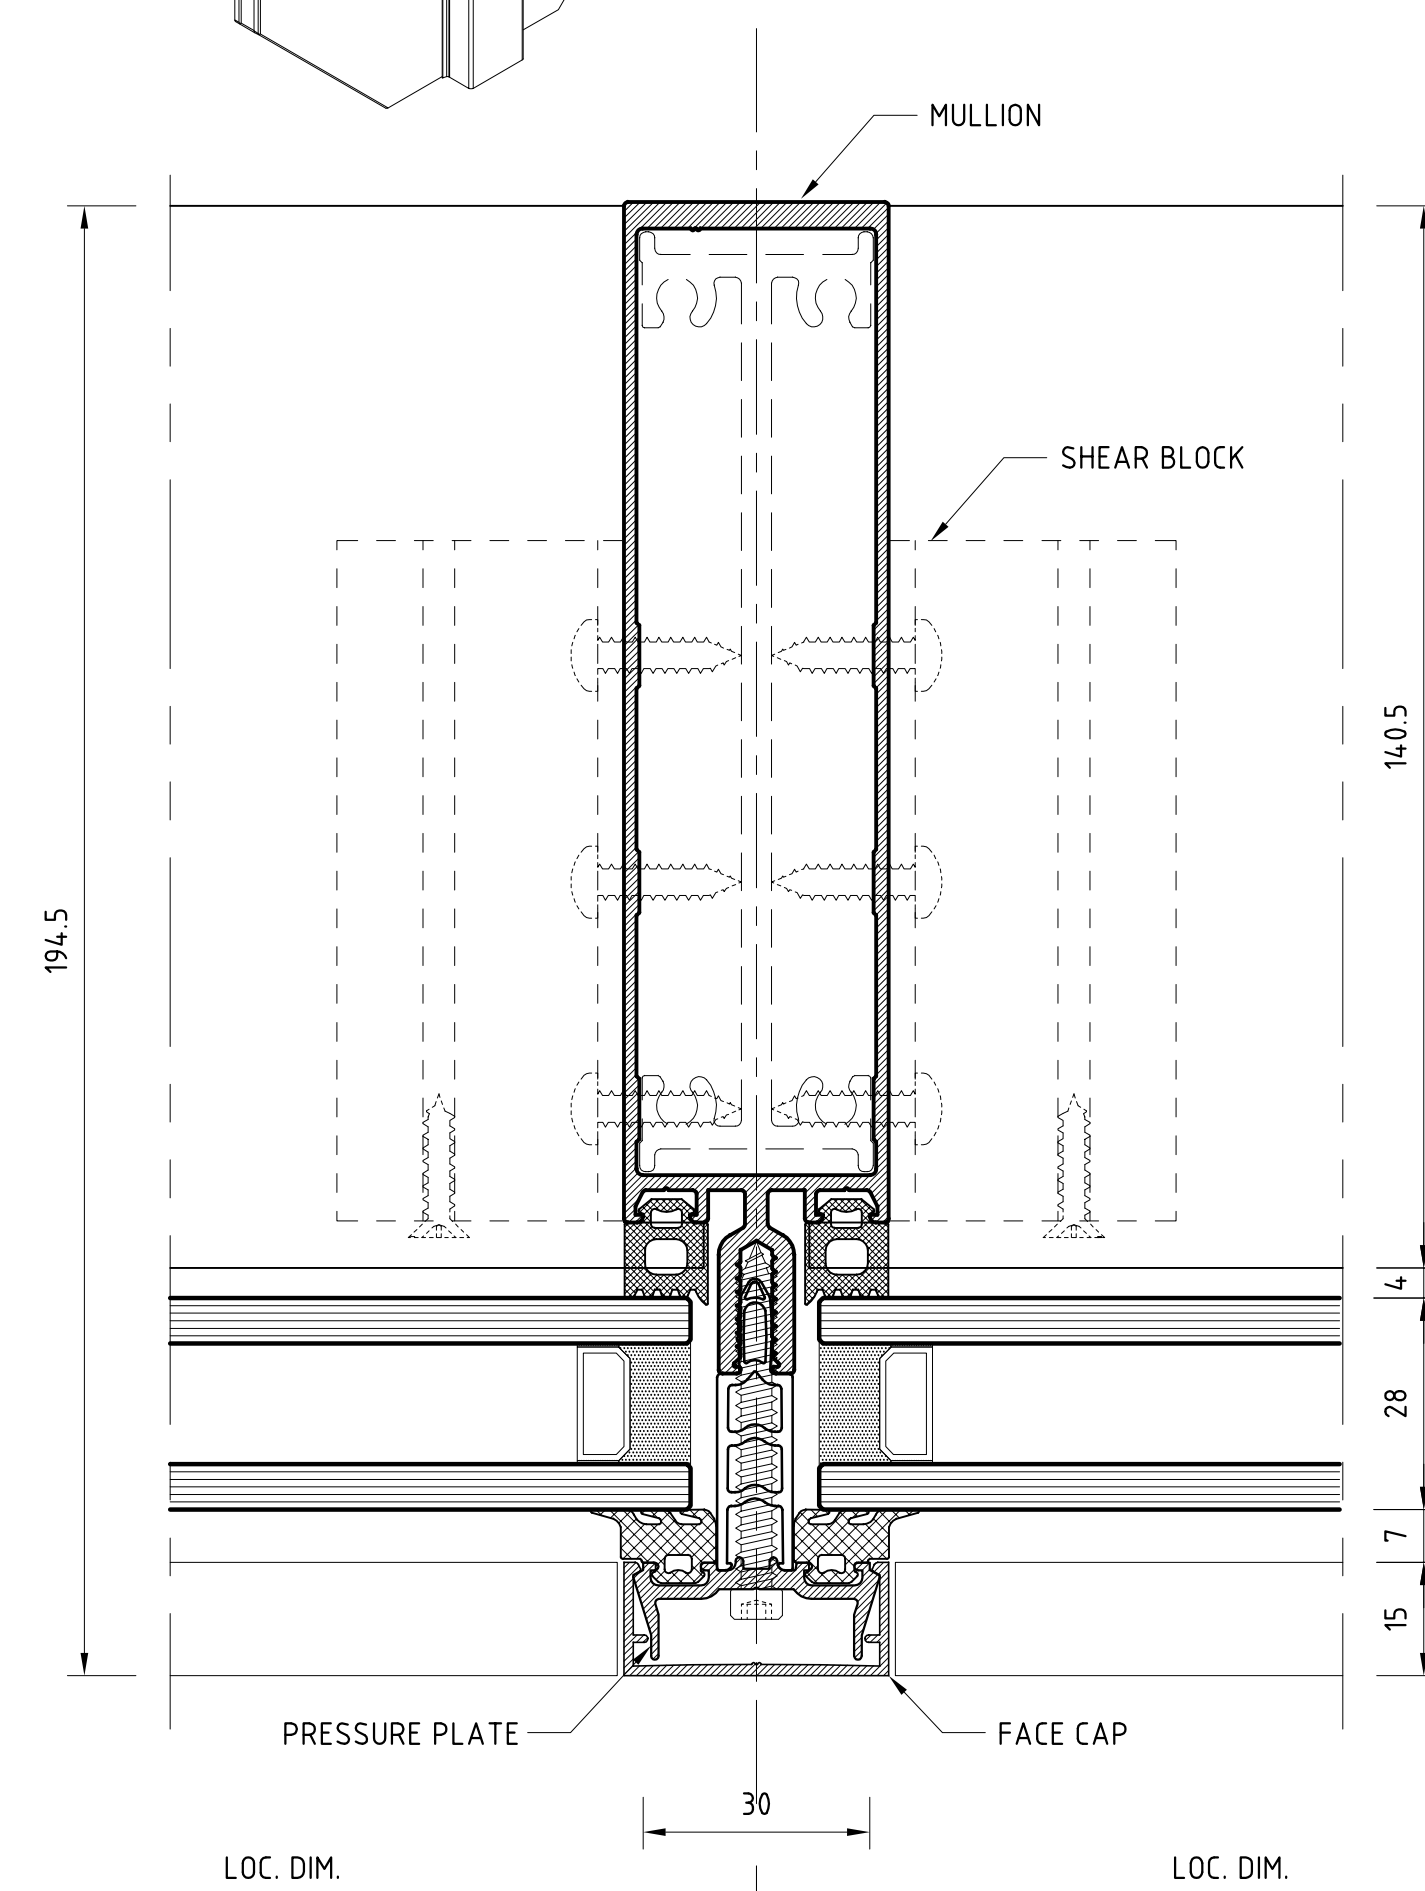











TYPICAL MULLION DETAIL

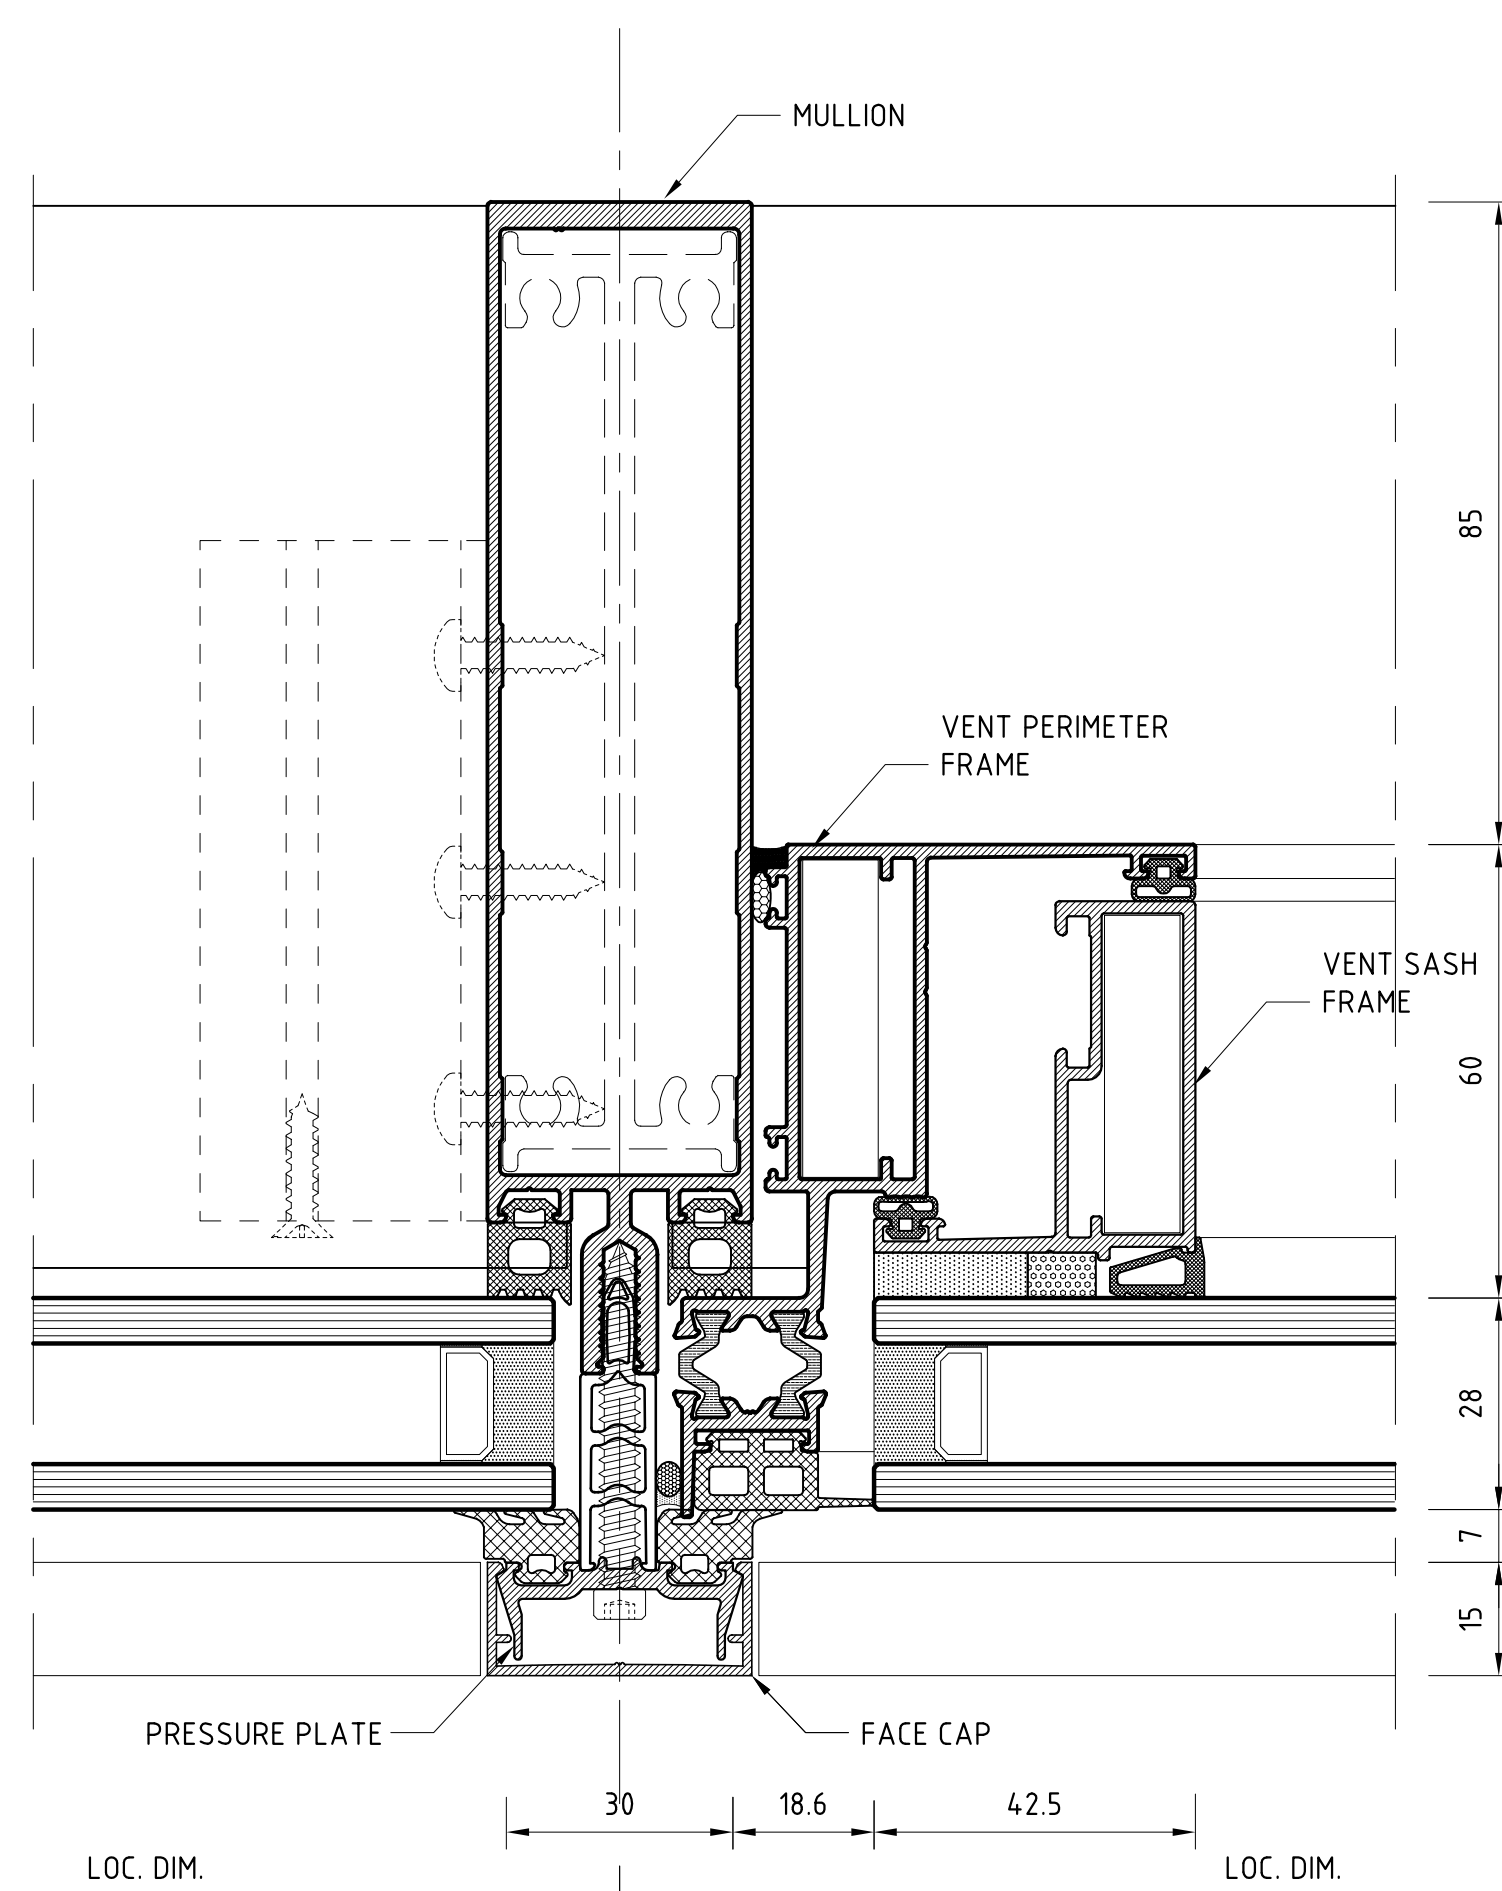

JAMB MULLION DETAIL

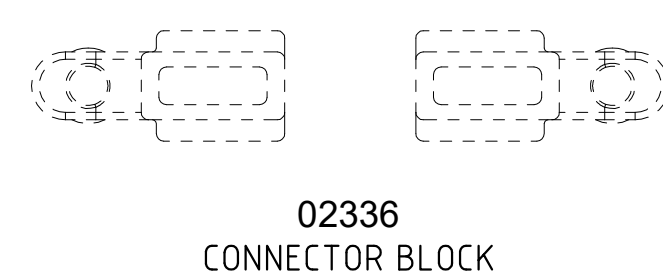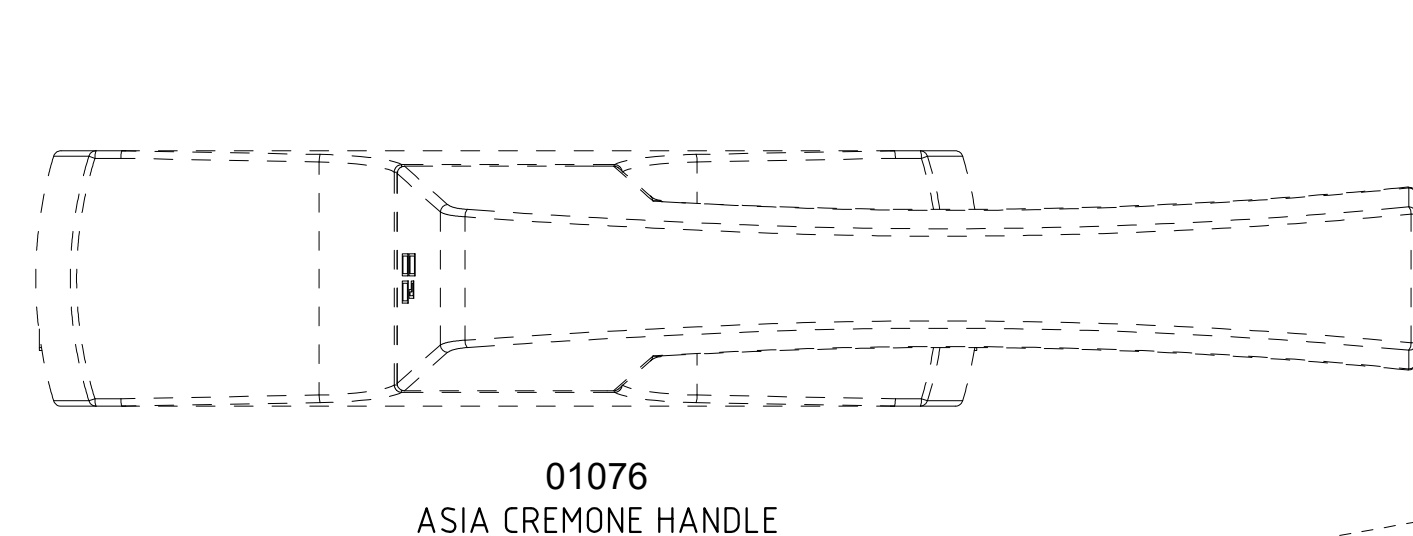


01410
PULL-IN DEVICE

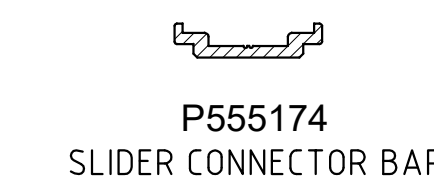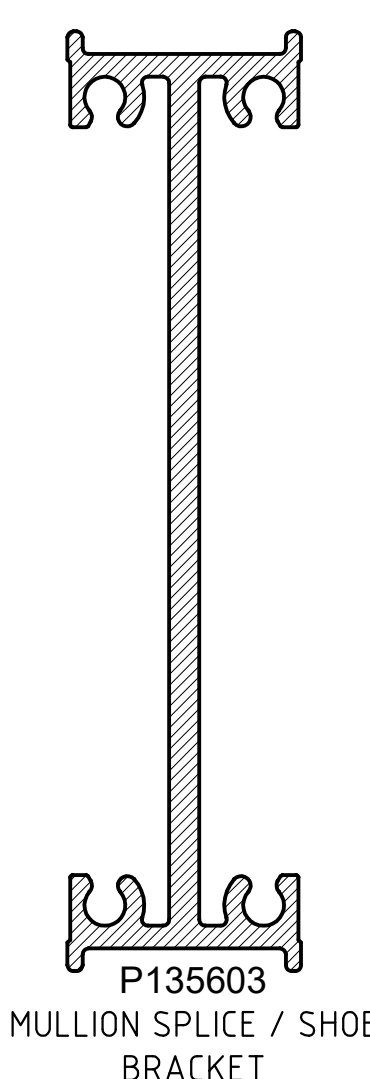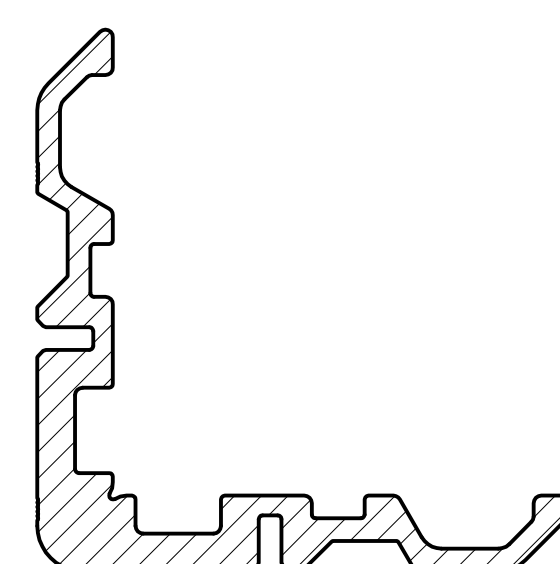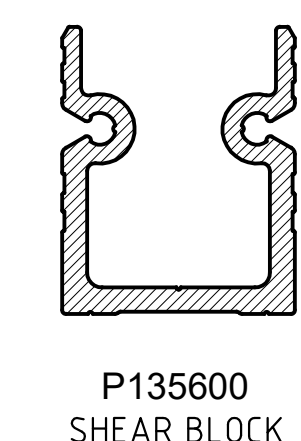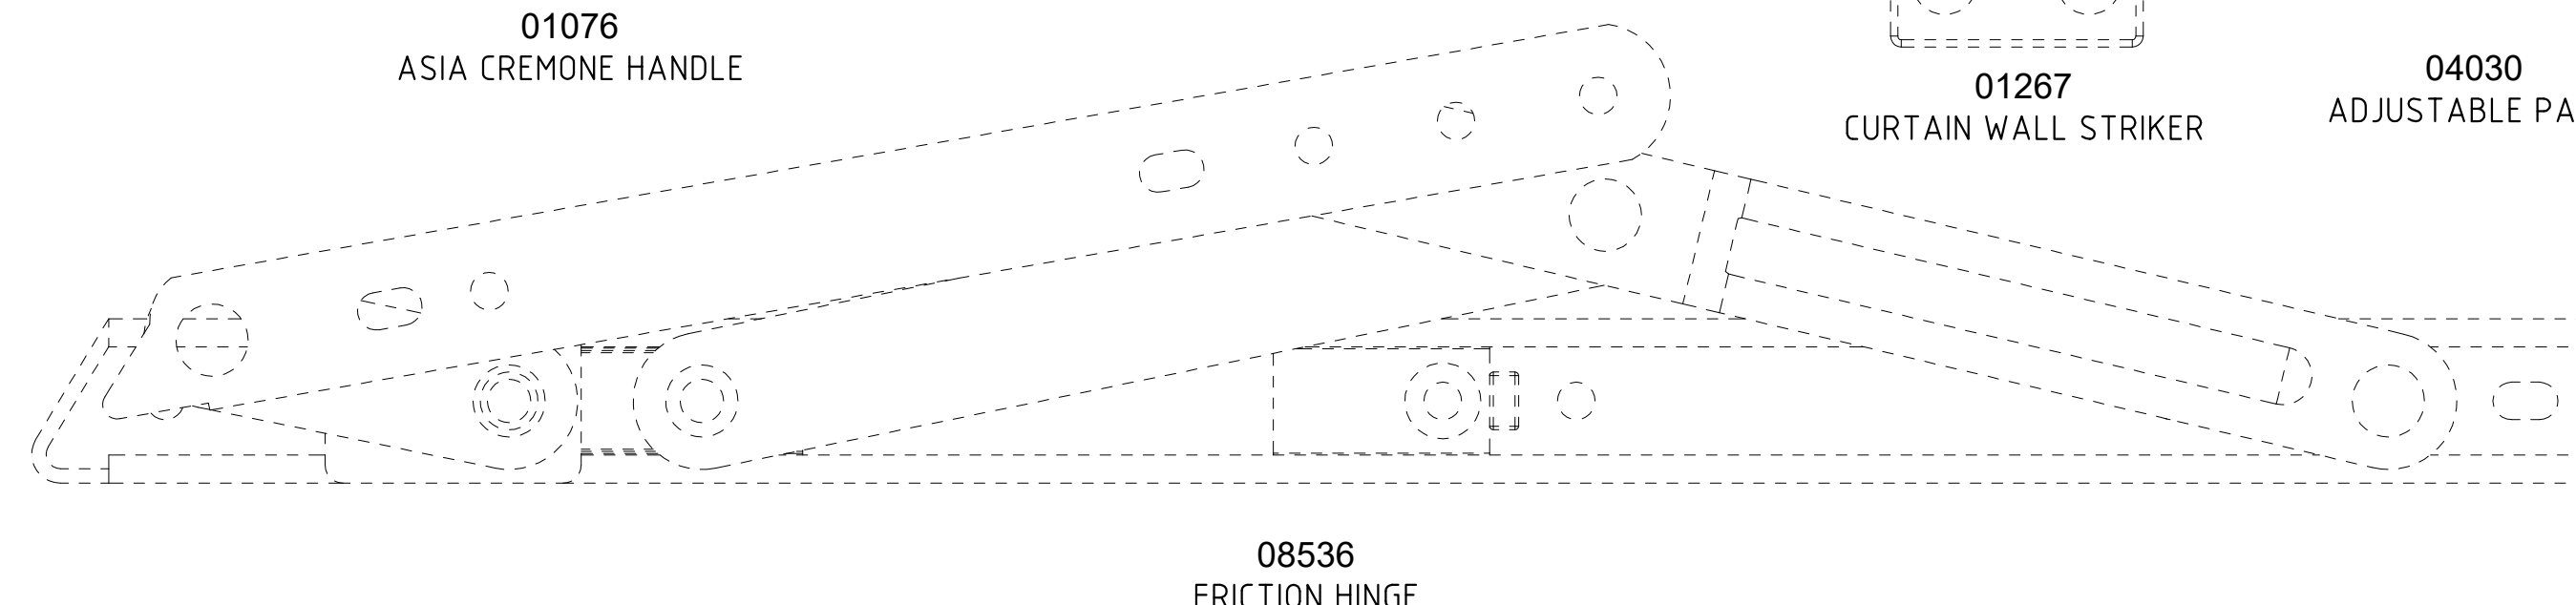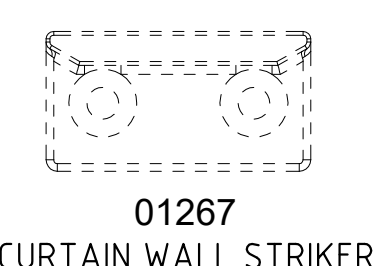


Project :

SY35 SLIM CURTAIN WALL TYPICAL DETAILS

Aluminum Fabricator :

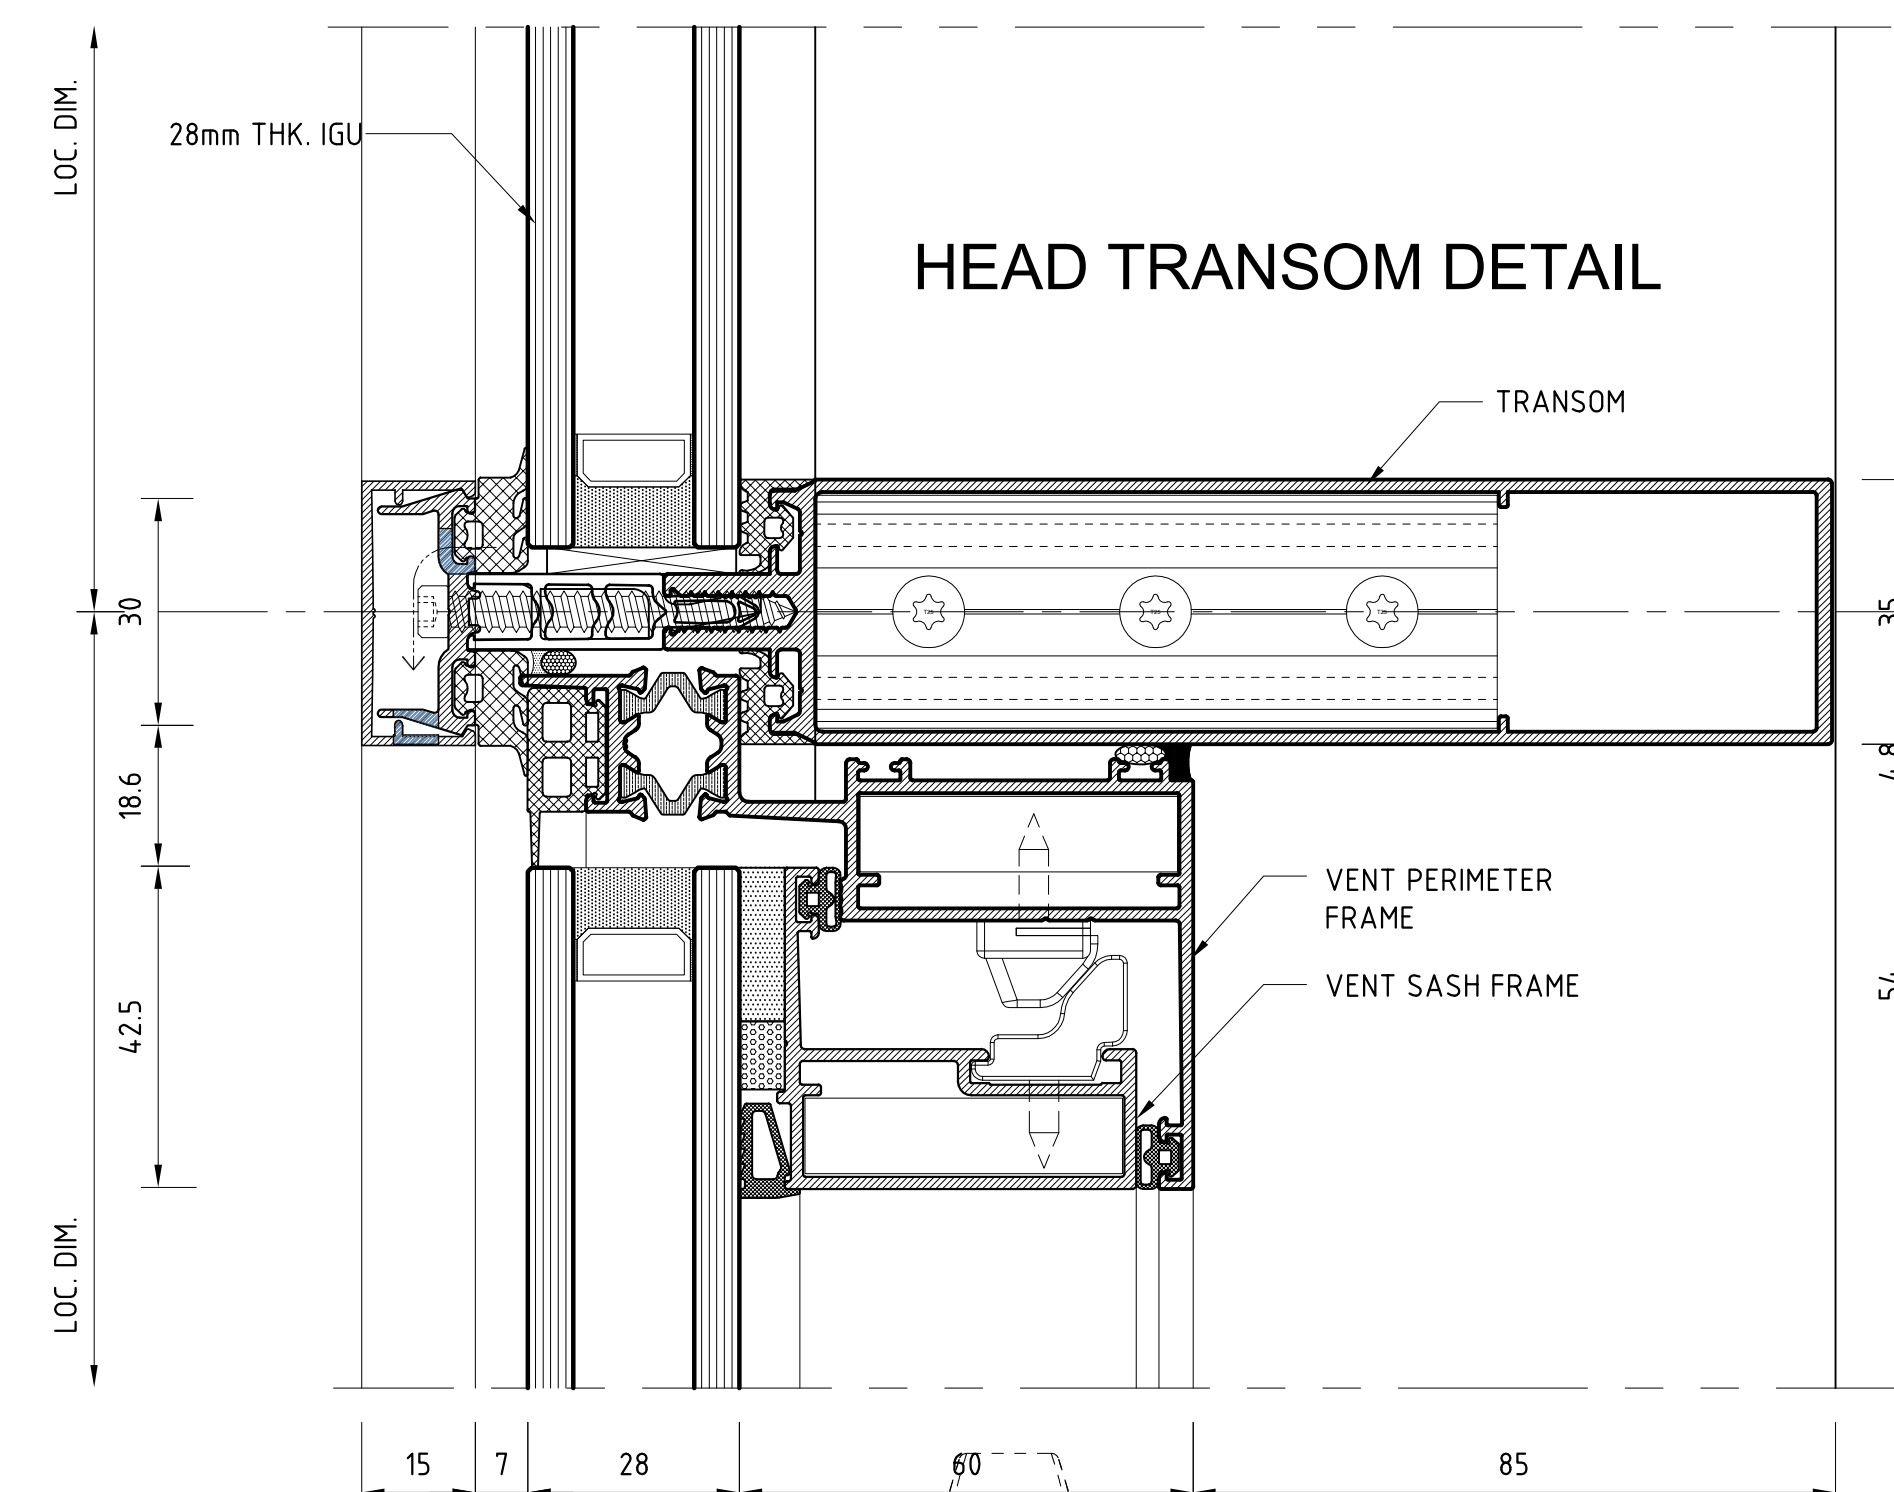

HEAD TRANSOM DETAIL

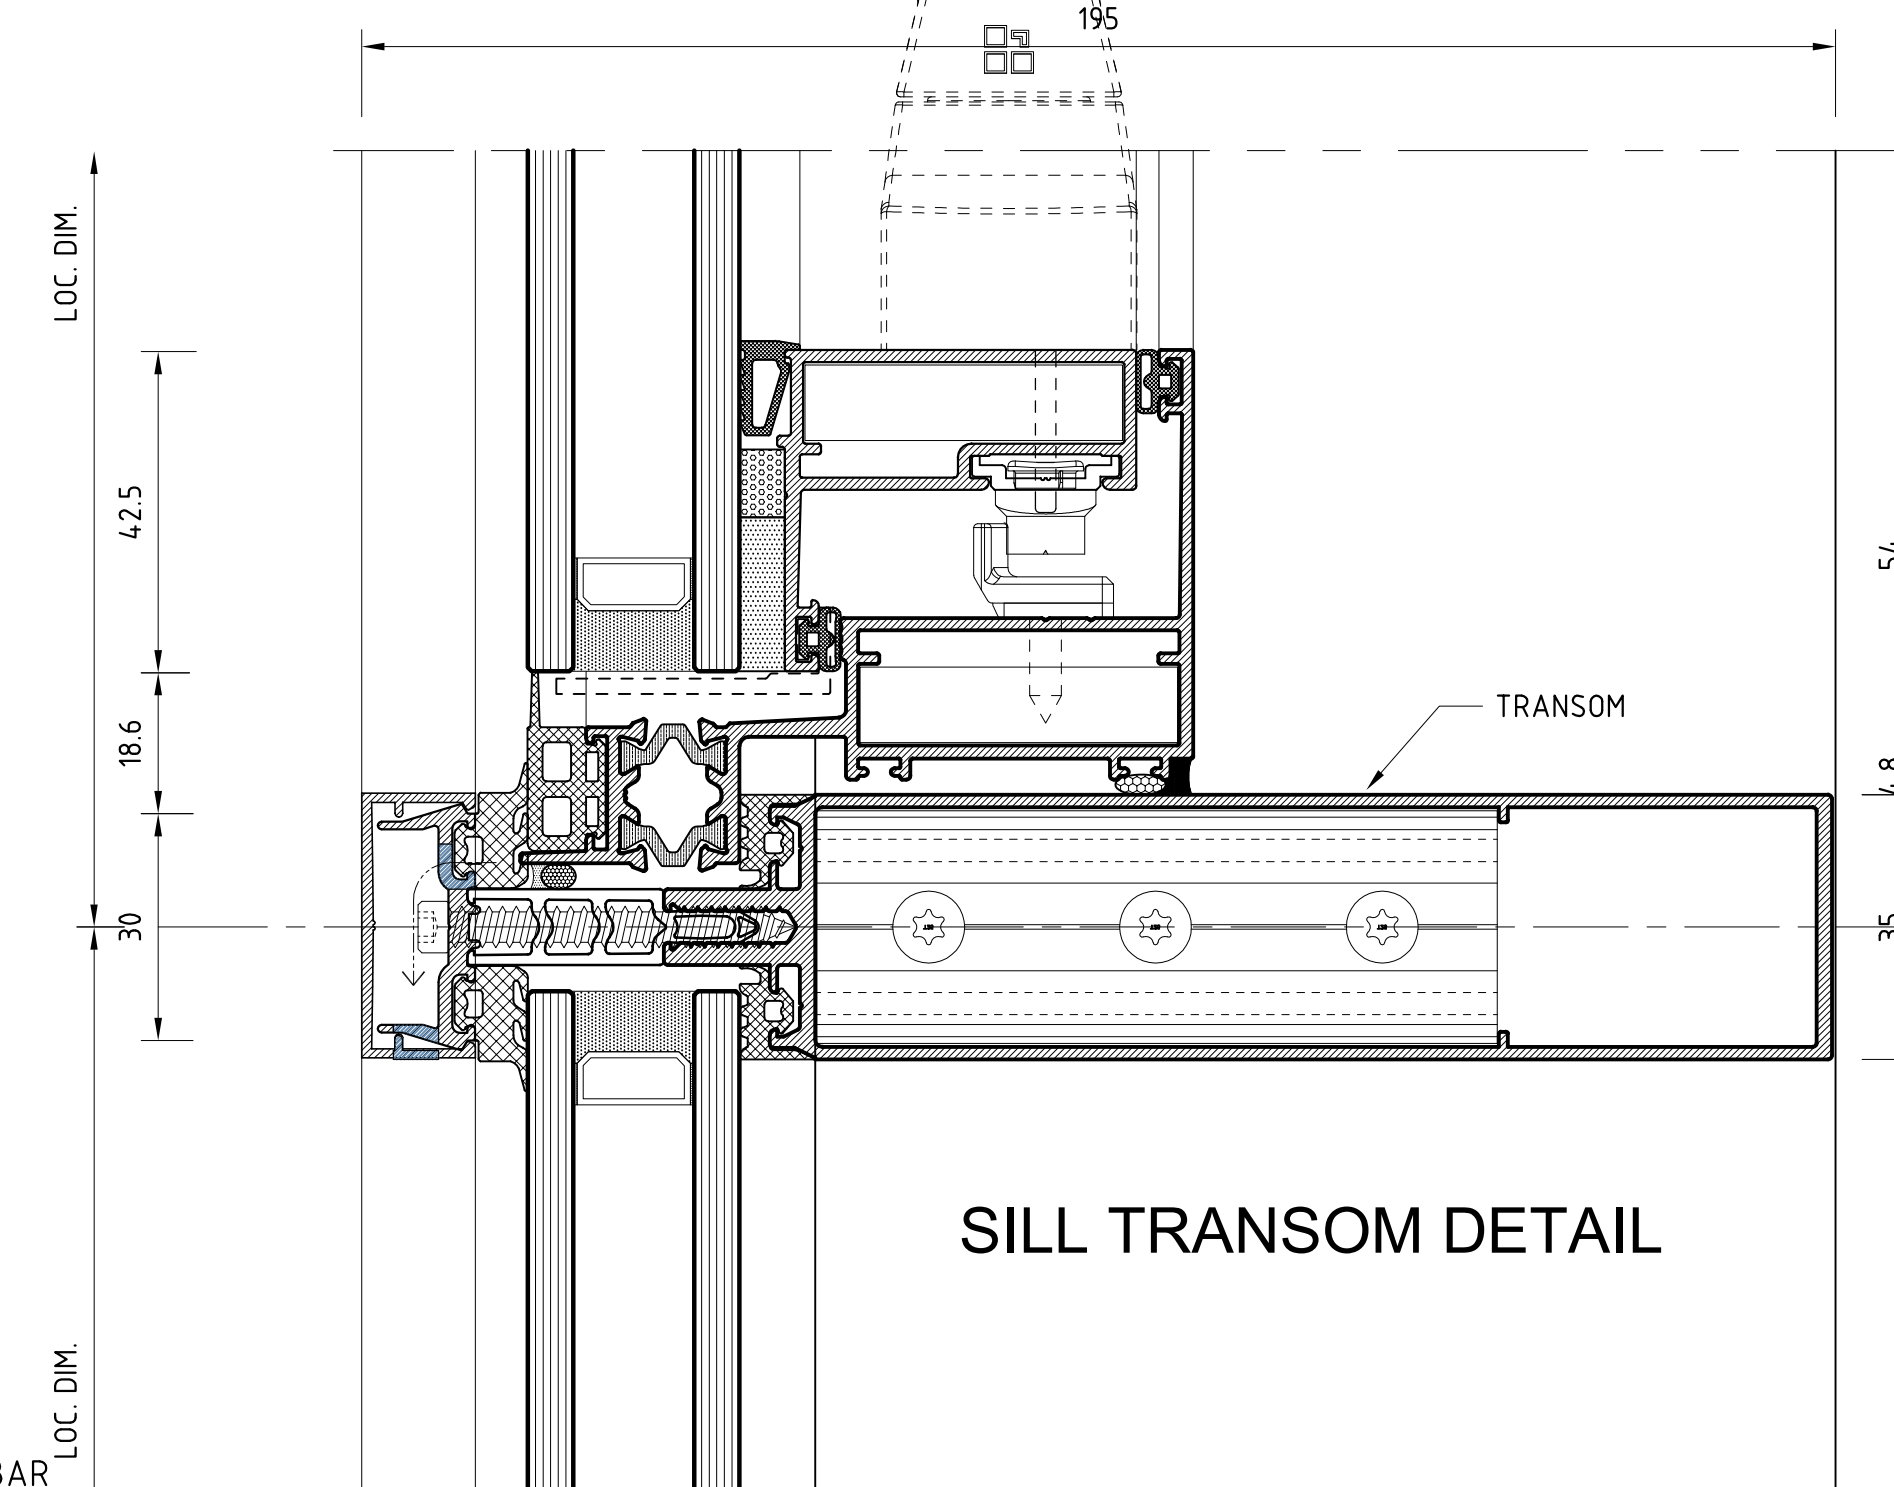

SILL TRANSOM DETAIL