

SYKON S60

Casement / Door System



60 mm
System depth




Aluminium
Frame material



24 mm / 28 mm
Tested glass thickness



EPDM gaskets
Sealing system

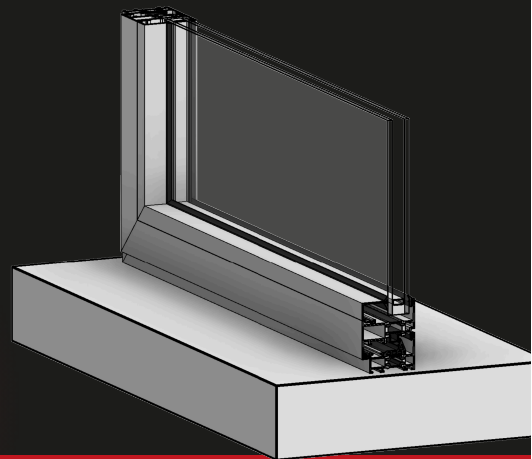

Product Overview

S60 is a 60 mm aluminium casement system.

The system includes:

- Casement windows (inward and outward opening)
- Hinged doors
- Concealed sash configurations
- Co-planar door configurations

Technical Specifications

System type	Casement / hinged door system
System depth	60 mm
Frame material	Aluminium
Thermal construction	Aluminium composite profiles
Glazing type	Double glazing
Tested glass thickness	24 mm / 28 mm
Sealing system	EPDM gaskets

Tested Performance

Air permeability — EN 12207	Class 4
Water tightness — EN 12208	Class 7A / Class 3A
Wind resistance — EN 12210	Class C3
Air infiltration — ASTM E283	Within 2.5 m ³ /h·m ² @ 75 Pa
Static water penetration — ASTM E331	600 Pa (no water ingress)
Wind resistance - serviceability — ASTM E330	+1400 Pa / +1920 Pa
Wind resistance - safety — ASTM E330	+2100 Pa / +2880 Pa
Sample type	Hinged door
Sample size	1000 × 2300 mm

System Options

Inward opening	Outward opening	Concealed sash	Co-planar doors
Storefront and entrance configurations	Tilt & Turn	Pull & Slide	Structural Glazed Door

Area of Usage

Residential buildings	Commercial buildings	Entrance doors	Window applications
-----------------------	----------------------	----------------	---------------------