

SYKON S77

Bi - Folding System



77 mm
System depth




Aluminium
Frame material



30 mm
Tested glass thickness



EPDM + brush seals
Sealing system

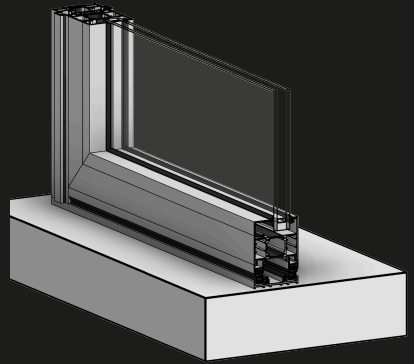

Product Overview

S77 is a 77 mm aluminium bi - folding system.

The system includes:

- Bi - folding door configurations (different variations)
- Integrated hinged door (swing-in or out)
- Multi-panel folding arrangements
- Bottom-supported system with rolling mechanism

Technical Specifications

System type	Bi-folding Doors / Windows
System depth	77 mm
Frame material	Aluminium
Profile system	Sykotherm Series 75 / 75 plus
Glazing type	Double glazing
Tested glass thickness	30 mm
Sealing system	EPDM + brush seals

Tested Performance

Air permeability — DIN EN 12207	Class 3
Water tightness — DIN EN 12208	Class 6A
Wind resistance — DIN EN 12210	Class C3
Resistance to vertical load (sash weight) — DIN EN 13115	Class 4
Test location	Germany (PIV Velbert Laboratory)
Test specimen size	2801 mm x 2500 mm
System type	Folding (3-leaf configuration)
Opening type	Inward opening
Glass type	Double glazing
Glass thickness	30 mm (10 + 14 + 6)

System Options

- Multiple panel configurations
- Inward or Outward opening / folding system
- Structural glazing option
- Standard glazing sash option
- 90 degrees Corner Profile option

Area of Usage

- Residential villas
- Openable façade systems
- Large opening areas
- Indoor-outdoor transition spaces