

SYKON SL450

Standard Sliding / Lift & Slide System



~106 – 167 mm (depending on rail type)
System depth




EN AW 6063
Aluminium alloy



~32 mm
Typical glazing thickness



Multi-level sealing system
Sealing system

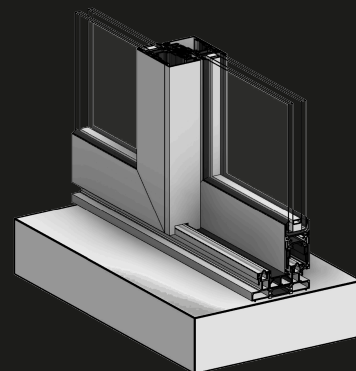

Product Overview

SL450 Standard Sliding / Lift & Slide is a heavy-duty thermal break sliding system designed for large openings and high-performance applications with an adoptable lift and slide mechanism for better performance ratings.

The system supports:

- Lift & slide doors
- Standard sliding configurations
- Mono, double, triple and multi-track systems
- Large panel configurations with high load capacity
- Embedded sill with gutter drain profile

Technical Specifications

System type	Lift & slide / sliding system
System depth	~106 – 167 mm (depending on rail type)
Aluminium alloy	EN AW 6063
Hardness	12 – 14 HB
Profile thickness	Up to ~6.0 mm
Thermal break	Polyamide (thermal insulated system)
Glazing type	Double glazing
Typical glazing thickness	~32 mm
Sealing system	Multi-level sealing system
Powder coating thickness	Min. 75 microns

Tested Performance

Air infiltration / exfiltration — ASTM E283	±300 Pa
Water penetration — ASTM E331	~400 Pa
Wind resistance – serviceability — ASTM E330	1920 Pa
Wind resistance – safety — ASTM E330	2880 Pa
Air permeability limit	≤ 5.4 m ³ /h·m ²
Sample area	5.28 m ²
Total allowable airflow	28.5 m ³ /h
Water penetration test pressure	~399 Pa
Water spray rate	3.5 L/m ² /min
Water test duration	15 minutes

System Options

Lift & slide configuration

Standard sliding configuration

Mono, double, triple, and quadruple tracks

Pocket sliding solutions

Corner configurations (symmetric corner profiles)

Flyscreen integration

Slim sash options

Area of Usage

Luxury villas

High-end residential projects

Beachfront and large opening façades

Commercial buildings