


SYKON SL450s



Thermal Break Sliding System

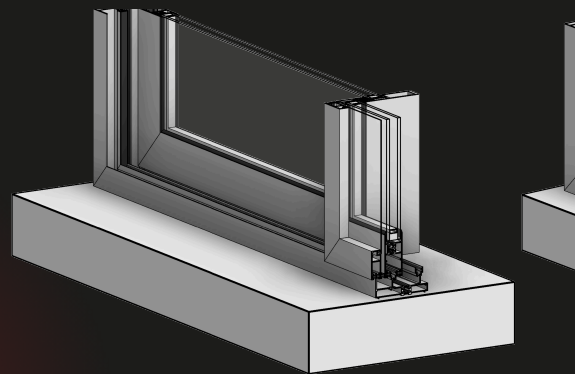

104 mm (minimum)
Frame width



EN AW 6063 (AlMgSi)
Aluminium alloy



Up to 28 mm
Maximum glazing thickness



Polyamide PA 6.6
Thermal break

Product Overview

SL450s is a thermal break sliding door and window system designed for residential and commercial applications.

The system supports:

- Sliding doors and windows
- Monorail Configuration (Fixed - Slide)
- Double Rail up to 5-Rail Configuration
- Embedded Sill with Gutter Profile
- Fixed and operable sidelights

Technical Specifications

System type	Sliding door / window system
Frame width	104 mm (minimum)
Sash height	75 mm
Interlock width	30 mm
Aluminium alloy	EN AW 6063 (AlMgSi)
Hardness	12 - 14 HB
Profile thickness	1.4 - 6.0 mm
Thermal break	Polyamide PA 6.6
Maximum panel weight	200 kg
Glazing type	Single / Double

Tested Performance

Air infiltration / exfiltration — ASTM E283	600 Pa
Water penetration — ASTM E331	600 Pa
Wind resistance - serviceability — ASTM E330	1920 Pa
Wind resistance - safety — ASTM E330	2880 Pa
Air infiltration @ +300 Pa	7.1 m ³ /h
Air infiltration @ +450 Pa	9.8 m ³ /h
Air infiltration @ +600 Pa	11.4 m ³ /h
Air exfiltration @ -300 Pa	3.3 m ³ /h
Air exfiltration @ -450 Pa	4.6 m ³ /h
Air exfiltration @ -600 Pa	5.6 m ³ /h

System Options

Monorail Configuration (Fixed - Slide)	Double Rail up to 5-Rail Configuration	Embedded Sill with Gutter Profile	Fixed and operable sidelights
Multiple panel configurations	Flyscreen integration and / or as add-on profile	Interlocking and meeting stile variations	

Area of Usage

Residential villas and apartments	Commercial buildings	Balconies and terraces	Sliding façade systems
-----------------------------------	----------------------	------------------------	------------------------