

SYKON SL580

Thermal Sliding System



58 mm sliding thermo

System designation



30 mm

Tested glass thickness




EPDM gasket

Sealing system



Standard Slide / Lift & Slide

System type

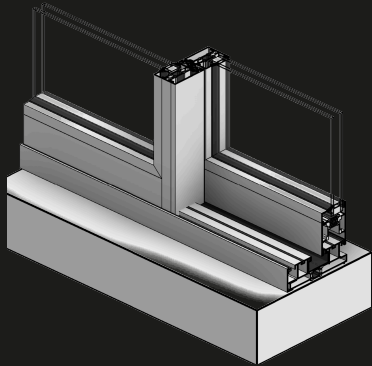

Product Overview

SL580 is a 58 mm thermally broken sliding system / lift & slide system.

The system includes:

- Double rail
- Triple rail
- Hotel type rail
- Sliding configurations with optional flyscreen

Technical Specifications

System type	Standard Slide / Lift & Slide
System designation	58 mm sliding thermo
Thermal break	Present (thermo system)
Glazing type	Double glazing
Tested glass thickness	30 mm
Sealing system	EPDM gasket

Tested Performance

Air infiltration — ASTM E283	1.74 - 2.91 m ³ /h·m ² (600-1000 Pa)
Static water penetration — ASTM E331	1000 Pa (no leakage)
Static water penetration (re-test) — ASTM E331	1200 Pa (no leakage)
Dynamic water penetration — AAMA 501.1	1000 Pa (no leakage)
Wind resistance - serviceability — ASTM E330	±1920 Pa (within L/175)
Wind resistance - safety — ASTM E330	±2880 Pa (no failure)
Specimen size	2.5 m × 3.0 m
Area	7.5 m ²
Glass type	Double glazing

System Options

Double rail

Triple rail

Hotel type rail (monorail)

Flyscreen integration

Embedded Rails

Area of Usage

High-rise buildings

Coastal and marine environments

Projects exposed to high wind and water loads

Residential and commercial façades requiring high performance

www.sykon.ae | info@sykon.ae