

SYKON SY35


Slim Curtain Wall System

35 mm
Sightline width

EN AW 6063 (AlMgSi)
Aluminium alloy

Up to 50 mm
Maximum glazing thickness

Two-level EPDM gasket
Sealing system

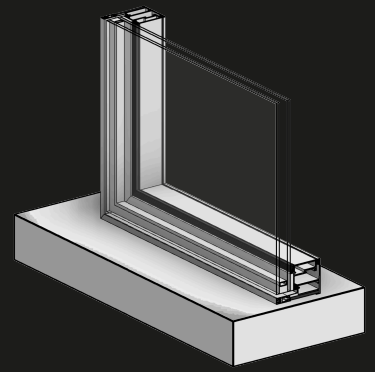

Product Overview

SY35 is a 35 mm slim stick curtain wall system designed for conventional façade applications with a reduced sightline profile.

The system provides a slender façade appearance while maintaining structural performance and allows integration of:

- Top-hung windows
- Operable vents
- Integrated façade door systems

Technical Specifications

System type	Stick curtain wall
Sightline width	35 mm
Mullion depth range	60 – 190 mm
Aluminium alloy	EN AW 6063 (AlMgSi)
Hardness	12 – 14 HB
Profile thickness	1.75 – 5.0 mm
Maximum inertia	Up to $I_x = 480.43 \text{ cm}^4$
Glazing type	Single / Double / Triple
Maximum glazing thickness	Up to 50 mm
Sealing system	Two-level EPDM gasket

Tested Performance

Air infiltration / exfiltration — ASTM E283	600 Pa
Static water penetration — ASTM E331	1200 Pa
Wind resistance - serviceability — ASTM E330	2000 Pa
Wind resistance - safety — ASTM E330	3000 Pa
Air infiltration	Within tested limits up to 600 Pa
Water penetration	No water ingress observed
Wind resistance	No structural failure under test loads

System Options

Captured (capped) curtain wall

Integrated top-hung window systems

Vent integration within façade grid

Continuous curtain wall and strip façade options

Area of Usage

Villas and residential developments

Resort and hospitality projects

Low to mid-rise buildings

Commercial façades requiring slim profiles