

SYKON SY35

Slim Curtain Wall System



35 mm
Sightline width




EN AW 6063 (AlMgSi)
Aluminium alloy



Up to 50 mm
Maximum glazing thickness



Two-level EPDM gasket
Sealing system

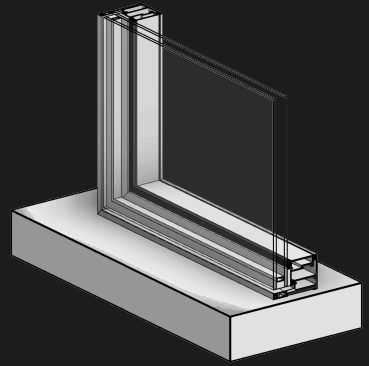

Product Overview

SY35 is a 35 mm slim stick curtain wall system designed for conventional façade applications with a reduced sightline profile.

The system provides a slender façade appearance while maintaining structural performance and allows integration of:

- Top-hung windows
- Operable vents
- Integrated façade door systems

Technical Specifications

System type	Stick curtain wall
Sightline width	35 mm
Mullion depth range	60 – 190 mm
Aluminium alloy	EN AW 6063 (AlMgSi)
Hardness	12 – 14 HB
Profile thickness	1.75 – 5.0 mm
Maximum inertia	Up to I _x = 480.43 cm ⁴
Glazing type	Single / Double / Triple
Maximum glazing thickness	Up to 50 mm
Sealing system	Two-level EPDM gasket

Tested Performance

Air infiltration / exfiltration — ASTM E283	600 Pa
Static water penetration — ASTM E331	1200 Pa
Wind resistance - serviceability — ASTM E330	2000 Pa
Wind resistance - safety — ASTM E330	3000 Pa
Air infiltration	Within tested limits up to 600 Pa
Water penetration	No water ingress observed
Wind resistance	No structural failure under test loads

System Options

- Captured (capped) curtain wall
- Integrated top-hung window systems
- Vent integration within façade grid
- Continuous curtain wall and strip façade options

Area of Usage

- Villas and residential developments
- Resort and hospitality projects
- Low to mid-rise buildings
- Commercial façades requiring slim profiles