

SYKON SY50

Curtain Wall System



50 mm
Sightline width




EN AW 6063
Aluminium alloy



Up to 50 mm
Maximum glazing thickness



Two-level EPDM gaskets
Sealing system

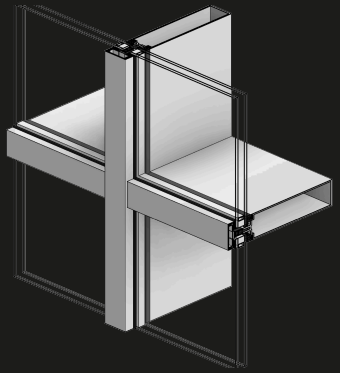

Product Overview

SY50 is a 50 mm stick curtain wall system designed for conventional captured glazing as well as 2-side and 4-side structural silicone glazing applications.

The system is suitable for both external and internal façade applications and allows integration of operable elements such as:

- Top-hung windows
- Parallel opening windows
- Tilt & turn windows
- Integrated door systems

Technical Specifications

System type	Stick curtain wall
Sightline width	50 mm
Mullion depth range	50 - 250 mm
Aluminium alloy	EN AW 6063
Hardness	12 - 14 HB
Profile thickness	2.0 - 5.0 mm
Maximum inertia	Up to $I_x = 1,496.96 \text{ cm}^4$
Glazing type	Single / Double / Triple
Maximum glazing thickness	Up to 50 mm
Sealing system	Two-level EPDM gaskets

Tested Performance

Air infiltration / exfiltration — ASTM E283	Tested up to 750 Pa
Static water penetration — ASTM E331	1200 Pa
Dynamic water penetration — AAMA 501.1	750 Pa
Wind resistance - serviceability — ASTM E330	2000 Pa
Wind resistance - safety — ASTM E330	4000 Pa
Inter-storey displacement (horizontal) — AAMA 501.4	±10 mm
Inter-storey displacement (vertical) — AAMA 501.7	±10 mm
Thermal cycling — AAMA 501.5	Completed cycles
Acoustic performance — EN / ASTM	38 dB (Rw / STC)
Air infiltration (fixed area @ +300 Pa)	4.2 m³/h

System Options

- Fully capped curtain wall
- 2-side mechanical toggle glazing with silicone weather seal
- 4-side mechanical toggle glazing with silicone weather seal
- Concealed and integrated operable elements
- Compatible with façade-integrated windows and doors

Area of Usage

- High-rise towers
- Commercial buildings
- Residential developments
- Hospitality projects