


DRIVEDOT / MODULE CARRIER

XIAO USB-C is the only power input. All module VCC pins receive 3.3 V.

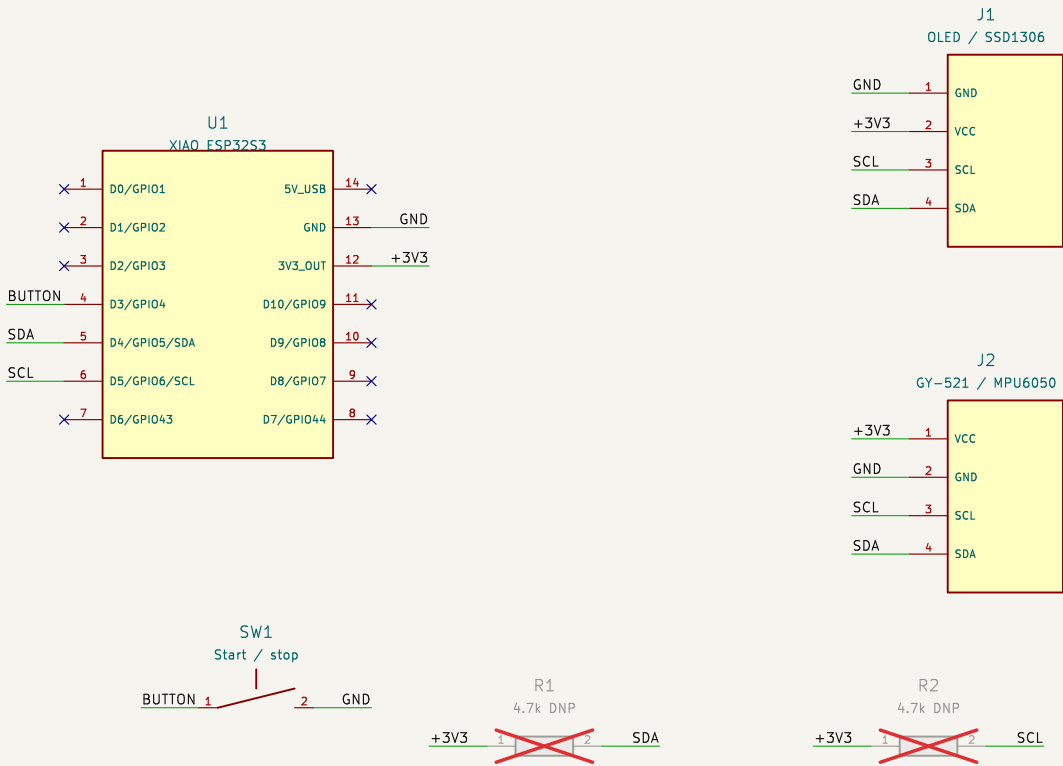

J1: wire to OLED labels GND / VCC / SCL / SDA. J2: wire to IMU labels VCC / GND / SCL / SDA.

GY-521 AD0 must be low for 0x68. Keep the IMU horizontal, rigidly mounted, and align axes.

R1/R2 are optional pull-up footprints: DO NOT POPULATE until the breakout pull-ups are checked.

D3 button uses firmware INPUT_PULLUP. No battery, car wiring, or radio functionality is used.

USB-powered module carrier; physical prototype not tested
Luke Nordin / DriveDot

Sheet: /
File: drivedot.kicad_sch

Title: DriveDot | revision A carrier

Size: A4 Date: 2026-10-02

KiCad E.D.A. 9.0.9

Rev: A

Id: 1/1