

Master's Thesis

Winter Term 2025/2026

Philipp Schlatter

Numerical Studies of Transition and Turbulence in a Flat-Plate Boundary Layer

Institute of Fluid Mechanics (LSTM)
LSTM Tech. Rep. 01/2025



Title
of your
thesis

Master's Thesis, Bachelor's Thesis, Project
Thesis

by
NAME

Stud.reg.no. XXXXXXXXX

Erlangen, xx.xx.xxxx

Institute of Fluid Mechanics
Faculty of Engineering
Friedrich–Alexander–University Erlangen–Nürnberg
Prof. Dr. Philipp Schlatter

Author:	NAME
Student Registration Number:	XXXXXXXXXX
Institute:	Institute of Fluid Mechanics
Head of Institute:	Prof. Dr. Techn. Philipp Schlatter
Group and Supervisor:	Prof. Dr.-Ing. habil. Stefan Becker Felix Czwielong
Assigned:	dd.mm.yyyy
Submitted:	dd.mm.yyyy
LSTM Technical Report:	01/2025

Declaration

I hereby declare formally that I have developed and written the enclosed thesis entirely by myself and without help of third parties and have not used sources or means without declaration in the text. Any thoughts or quotations, inferred (literally or analogously) from the sources, are marked as such. This thesis was not submitted in the same or substantially similar version to any other authority to achieve an academic grade.

The Friedrich–Alexander–Universität (FAU), represented by the Institute of Fluid Mechanics (LSTM), is granted a simple, free of charge, temporally and geographically unrestricted right to use the results of the work, including any protective rights and rights of use, for the purposes of research and teaching.

Erlangen, the DATE

Contents

Contents	I
List of Figures	II
List of Tables	III
Acronyms	1
1 Introduction	2
1.1 Important stuff	2
2 Basics	5
2.1 DNS	5
2.2 Turbulent boundary layer theory	5
2.3 curved TBL	7
2.4 Optimization??	7
2.5 Tools	7
3 Methods	9
3.1 Channel simulations/cooler name für 'Anfangssimulationen'	9
3.2 plane TBL simulations	9
3.3 curved TBL simulations	10
3.4 ZPG Generation	10
3.5 simulations with ZPG	13
3.6 General workflow	13
Bibliography	16
A Einleitung	17
A.1 Important stuff	17

List of Figures

1.1	The LSTM logo with the latest colours.	3
3.1	Worklow	14
A.1	The LSTM logo with the latest colours.	18

List of Tables

1.1	A table has the caption above.	4
-----	--	---

Acronyms

TBL turbulent boundary layer.

ZPG zero-pressure gradient.

1 Introduction

Refer to equations using the following way. In equation (A.1) we can replace $G(x)$. As seen in Fig. A.1, however, the referred object always needs to come before the corresponding text. We can refer to literature ? as an important citation (see for instance ?, and others).

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

$$G(x) = \sum_0^N \sin^2(x) \tag{1.1}$$

Refer to equations using the following way. In equation (A.1) we can replace $G(x)$. As seen in Fig. A.1, we can refer to ? as an important citation (see for instance ?, and others).

1.1 Important stuff

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.



Figure 1.1: The LSTM logo with the latest colours.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit

purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

Table 1.1: A table has the caption above.

title 1	title 2	title3
cell1	cell2	cell3
cell4	cell5	cell6
cell7	cell8	cell9

2 Basics

2.1 DNS

2.2 Turbulent boundary layer theory

- boundary layer develops const in flow direction - with increasing boundary layer thickness - wall shear stress not known a priori - behaviour in inner layer ess. same as in channel flow - equation for pressure gradient - definition of boundary layer thickness, displ. thickness, momentum thickness - corresponding Reynolds numbers - shape factor

Turbulent boundary layers boundary layers occur when fluids with non-zero viscosity stream over a wall that is not moving. IN these setups the so called *no-slip* boundary condition impacts the stream which states that the velocity of the fluid in wall-normal direction and in streamwise direction need to be zero directly at the wall Schlichting and Gersten (2017) since there is no relative movement between the wall and the fluid. The velocity far away from the wall, the so called *free-stream velocity*, is usually much higher than zero which implies the existence of a transition region where an acceleration of the fluid occurs. This so-called *boundary layer* is placed close to the wall. Depending on the Reynolds number the thickness of the boundary layer varies such that the boundary layer decreases with increasing Reynolds number Schlichting and Gersten (2017). The flow in the boundary layer can behave laminar or turbulent, whereas in this thesis we will focus on turbulent boundary layer (TBL). The boundary layer grows in streamwise direction and can be described via multiple characteristic quantities. The introduction of these quantities requires a consistent coordinate system: We define x as the streamwise direction with its corresponding velocity u , y represents the wall-normal direction with velocity component v and z describes the spanwise direction with velocity component w . In the free stream far away from the wall we assume U_0 being the dominant velocity component. For simplicity this free-stream velocity is often set to be 1. The velocity component in streamwise direction inside the boundary layer is named as $u(x, y)$. To describe the thickness of a boundary layer mainly three different parameters are used: the boundary-layer thickness $\delta_{99}(x)$, which describes the distance from the wall at which the velocity $u(x, y)$ derives 99% of the free-stream velocity; the displacement thickness δ^* , which defines the displacement of an inviscid fluid to preserve the same mass flow; and the momentum thickness θ which define the displacement of an inviscid fluid to fulfill the conservation of momentum. These quantities can be derived with the following equations

$$u(x, \delta_{99}(x)) = 0.99U_0 \quad (2.1)$$

$$\delta^*(x) = \int_0^\infty \left(1 - \frac{u(x, y)}{U_0}\right) dy \quad \theta(x) = \int_0^\infty \frac{u(x, y)}{U_0} \left(1 - \frac{u(x, y)}{U_0}\right) dy \quad (2.2)$$

In this thesis we use the momentum thickness θ to characterize the height of the boundary layer,

since it can be measured more accurate than the boundary-layer thickness. To describe the boundary-layer with the Reynolds number, different Reynolds numbers based on the introduced displacement measures are defined as

$$\text{Re}_x = \frac{U_0 x}{\nu}, \quad \text{Re}_{\delta_{99}} = \frac{U_0 \delta_{99}}{\nu}, \quad \text{Re}_{\delta^*} = \frac{U_0 \delta^*}{\nu}, \quad \text{Re}_\theta = \frac{U_0 \theta}{\nu}. \quad (2.3)$$

ν : viscosity

From the Naviers-Stokes equations (NSE) we can derive the boundary layer equations for a 2D boundary layer over a fixed flat wall for an incompressible fluid.

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0 \quad (2.4)$$

$$u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} = -\frac{1}{\rho} \frac{\partial p}{\partial x} + \nu \frac{\partial^2 u}{\partial y^2} \quad (2.5)$$

$$0 = -\frac{1}{\rho} \frac{\partial p}{\partial y} \quad (2.6)$$

With this equation we can define the wall shear stress τ_w as

$$\tau_w := \mu \left. \frac{dU}{dy} \right|_w = -h \frac{dp_w}{dx}. \quad (2.7)$$

To study the phenomenons in a boundary layer it is required to define so called viscous scales since the ranges of dimensions and velocity variations are much smaller than in the free-stream. Based in the wall shear stress the friction velocity u_τ , the viscous length scale δ_ν and the friction Reynolds number Re_τ are introduced as

$$u_\tau = \sqrt{\frac{\tau_w}{\rho}} \quad \delta_\nu = \frac{\nu}{u_\tau} \quad Re_\tau = \frac{\delta_{99} u_\tau}{\nu} \quad (2.8)$$

With these quantities the original length and velocity scales can be nondimensionalized in wall units as (fundamentals of tubr flows)

$$y^+ = \frac{y}{\delta_\nu} = \frac{y u_\tau}{\nu}, \quad u^+ = \frac{U}{u_\tau}. \quad (2.9)$$

The advantage of these non-dimensional scales is that they are universal for all wall buonded flows what enables the comparison between flows with different physical dimensions. XX unbedingt QUELLE XX

something about plus units

2.2.1 zero pressure gradient tbl

generel pressure gradient in TBL clauser parameter

2.3 curved TBL

Most research about TBL focusses on TBL across straight walls. (XXQUELLE) However, there are many real-world applications where the wall is not fully straight but shows curved sections as well (XXQUELLE). The effects in TBL along curved walls are still poorly studied (XXQUELLE) since it covers some difficulties. Due to the curved shape a pressure gradient in streamwise direction builds up naturally which makes it hard to separate the source of observed physical effects (So and Mellor). As So and Mellor (1973) observed in their experiments without pressure adjustment the pressure decreases slow near the beginning of the curvature and then decreases fast once the curvature starts. Since these pressure variations have a high impact on the turbulent structures, an exclusive study of curvature effects requires a compensation of these pressure variations (XXQUELLE). Therefore, it is possible to study curved TBL under zero-pressure gradient conditions (see XXX), or to impose a defined pressure gradient (see XXX). In experimental studies a defined pressure distribution is achieved by adjusting the position of the upper wall (So and Mellor),(Johnston et al.) (Gillis and Johnston, 1983). In simulations XX some techniques used in simulations papers (Schlatter).

From these studies some general statements about the effects of curvature on the TBL can be summarized. First a boundary layer along a convex wall with ZPG shows smaller growth rate compared to a straight developing turbulent boundary layer (TBL) (So and Mellor), (Meroney and Bradshaw, 1975). This phenomenon is caused by a pressure gradient in centripetal direction. It balances the centrifugal force of the fluid elements. Through the centrifugal force fluid particles with high velocities will be pushed to a new outer position. The pressure gradient forces the fluid particle in the opposite direction (So and Mellor), (Meroney and Bradshaw, 1975). Gillis and Johnston (1983) observed a decrease in the turbulent scales as consequence of a convex curvature. In addition, they found that the law of the wall coincides for the curved wall with the same parameters as for flat wall measurements.

The analysis of curved TBL covers some difficulties

- pressure gradient in curved tbl So and Mellor: liste page 93-94 -> beobachtungen an convex tbl

So and Mellor: p 2: physical processes in Tbl through curvature So and Mellor: p 8: pressure gradient in curved wall exists So and Mellor: p 29. without pressure adjustment: pressure decreases slow when near the start of curvature, steep decrease in curvature

why is it important?

gillis and johnston: some general states History effects and near equilibrium in adverse-pressure-gradient turbulent boundary layers (Bobke) Y. Morita, S. Rezaei-Ravesh, N. Tabatabaei, R. Vinuesa, K. Fukagata, P. Schlatter, Applying Bayesian optimization with Gaussian process regression to computational fluid dynamics problems,

2.4 Optimization??

2.5 Tools

XX das hier vlt in Basics?? XX

To work on this project multiple tools were used. Most of the fluid-flow simulations (korrekte

bezeichnung??) were performed with DNS (see XX section 2.1). To perform these simulations the spectral element code NEKO was used. Blabla über neko When running simulaitons with NEKO it is possible to take statistics of the simulated flow during run time. Multiple settings about how the statistics should be recorded can be defined in the case file of the simulation. For example it is possible to define one or two axis along which the statistics should be averaged. These statistics are used to extract and compute certain measures of the flow. To do this some postprocessing of the recorded statistics is necessary. This is done in PYTHON where the package PYSEMTTOOLS is included. With this package data recorded in NEKO simulaitons can be extracted and interpolated from an SEM mesh into any arbitrary points (zu nah an github description). Then multiple statistical measures like the budget terms can be calculated. In addition to the DNS, some RANS simulations were performed as well. To run these simulations the open source software OPENFOAM is used. THis software is able to perform RANS simulations of fluid flows with diffenret turbulence models. To extract velocity fields etc from the simulation PYTHON is used. All simulations are performed on the cluster of the RRZE of the FAU. Blabla über cluster

3 Methods

In the following chapter the methods used in this thesis are presented. In the beginning the used tools are introduced. Then the workflow of the handled project is described and in the end the used optimization method is discussed briefly.

3.1 Channel simulations/cooler name für 'Anfangssimulationen'

3.2 plane TBL simulations

In the following part of the project we created a setup for a simulation of a TBL across a plane wall. These simulations are used to verify the general settings of a TBL simulations, and to verify the results through the comparison with similar simulations. The domain is defined as a box of the dimension $325 \times 24.5 \times 24.5$ which corresponds to $50\delta_{99} \times 4\delta_{99} \times 4\delta_{99}$ measured at a reference point at $Re_\theta = 1000$. The resolution in streamwise and spanwise direction is constant with $x^+ = 12$ and $z^+ = 6$. In wall-normal direction the resolution decreases with increasing distance from the lower wall starting at the wall with a resolution of $y^+ = 0.8$. In the middle the resolution is constant on a quite coarse level. At the upper wall there is a small area where the resolution again increases since there the shear stress is measured (XXstimmt das??). The mesh is created with GMSH. First a 2D mesh is constructed in the $x-y$ / streamwise- wall-normal-plane is created. With the mesh transform tool in NEKO it is then extended in the spanwise direction.

Boundary and initial conditions

To setup the turbulent boundary layer boundary and initial conditions are necessary. In the initial condition a boundary layer is imposed at the lower wall. Since a laminar boundary layer has the quite easy Blasius profile as solution, a laminar boundary layer is given as initial velocity condition. The velocity in the free-stream U_0 is set to be 1 initially. As boundary conditions we impose a no-slip condition on the lower wall. The outflow has the boundary condition 'outflow+dong', which means XXX. For the upper wall we tested two different setups. For one simulation we put a 'normal outflow' condition at the top wall, which allows outflow in normal direction across the domain end. In the other simulation we imposed a Dirichlet condition with (1,0,0) as velocity profile. This is done to compare the effect of the different boundary conditions on the flow behaviour. This becomes especially important for the simulation of the curved TBL, since there the boundary condition needs to be imposed piecewise on the top wall.

Case settings

The additional settings for the simulation are defined in the CASE-file. The polynomial order used for the simulations is 7 and the time order is 3. To enable shorter simulation times, the

simulations first are started with lower polynomial order during the developing time of the TBL. When the TBL is stable the polynomial order is increased for higher result accuracy. All settings in the case file are listed in XXANHANG.

3.3 curved TBL simulations

- meshing - imposing bc - case settings

In the next step to derive the curved ZPG TBL we first need to create a general setup for the curved TBL. As a basis we use the setup of the plane TBL and add a curved part at the end of the domain of the plane TBL. The plane part is necessary such that the TBL can develop properly since we want $Re_\theta \approx 1000$ when the curvature starts. The curved part has a constant radius and develops in negative wall-normal direction. Therefore, the TBL experiences a convex curvature. At the end of the curvature another straight domain part is added which is called *straight outlet*. There is a smooth transition between the curved part and the straight outlet because it follows the tangential direction of the end of the curved part. The complete set up is shown in fig XX. The straight outlet is applied to reduce the impact of the boundary conditions at the outflow. The pressure BC as the outflow forces the pressure to be zero. Since the pressure does XX in the curvature, this outflow condition would impact its behaviour and therefore the development of the TBL. To reduce this impact the straight outlet is added. XX general dimension of domain XX The mesh is generated similar to the one used for the plane TBL and adapted to the shape of the domain. In the straight outlet the mesh is coarsened since this part of the domain is not relevant for the study of the curved TBL.

The imposed boundary and initial conditions are the same used for the plane TBL. However, they need some modifications due to the curvature. The boundary conditions are summarized in the following table: XXXXXXXX As initial condition the blasius boundary layer was used similar as for the plane TBL. In the curved part the blasius profile is rotated such that it is formed in wall-normal direction.

This setup was used to created different variations of curved TBL. We tested two different radii such that we can study the impact of the amplitude of the curvature. To do this we the radii of $R_1 = 100 * \delta_{99}$ and $R_2 = 500 * \delta_{99}$ with δ_{99} measured in the plane TBL at $Re_\theta = 1000$. For both radii we tested the angles of 30° and 90° of a circular arc.

XX Tabelle mit Fällen XX

3.4 ZPG Generation

In the next step the procedure to generate a ZPG in the curved TBL domain is introduced. This procedure is done on OPEFOAM using the Bayesion optimizer code (ref: Eman etc XX, ref: basics XX). As described in XX the code is able to optimize the shape of the domain to achieve a given pressure gradient function, which in this case is ZPG. To do this the simulaiton setup has to be transferred to OPENFOAM. In the following paragraph the necessary steps are described in detail.

3.4.1 OpenFOAM setup

General settings RNAS model

Mesh Generation The transfer of the curved TBL simulation setup to OPENFOAM includes some adaptations which will be presented here. First, the mesh has to be regenerated. It is not possible to use a mesh created in GMSH and transfer it to OPENFOAM, since the code has to adapt the domain and the mesh after every iteration of the optimization. Therefore, the domain has to be regenerated in every iteration with `blockMesh`. As a consequence the domain has to be defined in `blockMeshDict`. The plane part is meshed with rectangular blocks. The domain close to the lower wall has a progression factor included such that the resolution increases towards the wall. In the curved part the lower wall is defined through a circle arc similar to the GMSH mesh used in NEKO. The upper wall is determined by a spline. The points defining the spline are the coordinates x_{θ_i} , y_{θ_i} of the *design parameters* θ_i whose position is modified to minimize the *objective function*. The optimization code is constructed such that it modifies position of the *design parameters* in wall-normal direction. Since the *design space* is curved, the wall-normal direction does not correspond to a fixed axis. Hence, their position has to be transformed in x - and y - coordinates to define the spline correctly in space. Compared to the domain used for the DNS, the height of the domain is increased to $\delta_{99} * XX = XX$. This modification brings some simplifications when the results of the optimized OPENFOAM simulation are transferred to the DNS domain which will be described later (see XX).

XX HIER BILD VON MESH XX

Initial conditions or boundary condition ??XX The quantities that need predefined initial conditions depend on the chosen RANS model (XXQuelle). Since in this project the $k - \omega - sst$ -model is used, it is necessary to define initial conditions for turbulent kinetic energy k , dissipation ω and velocity U . This is done due to the imposition of an initial field at the inflow which is extracted from the previous DNS simulation of the curved TBL (see XX). Therefore, a slice of the fully developed TBL from the DNS simulation is taken. We take this slice at the streamwise position in the plane part of the domain where $Re_{theta} = 1000$ is reached is identified. At this streamwise position the fields of U , k and ω are extracted along the height of the domain. In order to do this we perform a postprocessing of the DNS simulation with the OPENFOAM-mesh used as interpolation points. With the PYTHON package *fluidfoam* it is possible to read an OPENFOAM mesh. This is used to extract the points of the OPENFOAM mesh at its inflow. These points are used as interpolation points to perform the postprocessing. As described earlier the domain used in OPENFOAM is higher than the one for the DNS simulations. The usage of this higher domain would lead to interpolation conflicts since there are no data for the upper interpolation points. To avoid these conflicts the interpolation points lying beyond the height of the DNS domain are cutted. They will be filled manually at the end of the script. With these interpolation points the postprocessing script starts until one can extract the values. The values for U can be extracted directly, whereas k and ω need to be computed. To use these fields in the higher OPENFOAM domain additional values for the upper part of the inflow are manually added. For this part of the inflow the last interpolated value is copied and added in the remaining cells.

3.4.2 Optimization settings

- how many design variables - where are they located - why? how many iterations - all settings done for the optimization

The results of this simulation are used as inflow condition for the following RANS simulations in OPENFOAM. More precisely the measure of U , k and ω at the position of $Re_{theta} = 1000$ are extracted. Then the OPENFOAM simulation is set up such that the profile at $Re_{theta} = 1000$ from the DNS is used as initial condition at the inflow of the domain in the RANS simulation.

The general settings of the optimization are the same for all performed tests. However, the number and position of the *design parameters* varies depending on the case. For all cases the optimization is started with 5 *design variables* equally spaced along the curvature. For the case with the small radius and 30° curvature this setup gave insufficient small residuals. Therefore successively more *design points* were positioned in between the existing ones especially where the value of the loss parameter was higher than the average. In the final configuration 8 *design parameters* we used in the curved area. The optimization of this setup then leads to the progression of beta along the lower wall pictured in figure X. As we can see there the value of beta XXXX. However, there is a sharp negative peak when the curvature starts. This means that with this set up the inflow in the curved part does not fulfill a ZPG. Since we wanted to enforce a ZPG already at the start of the curvature we needed to modify the optimization. To do this, first the current best setup is copied and its *design parameters* stored. In the new optimization setup we focus only on the part near the start of the curvature. To modify the pressure gradient in this region it is necessary to position additional *design parameters* in the straight part. We decided to add two more *design parameters*. one of them is positioned directly at the transition of the straight to the curved part. The second one is positioned at $2/3$ the straight length behind the inflow. With these additional points the optimization range along the lower wall can be extended beyond the beginning of the curvature. Since the length of this inflow region relative to the length of the whole optimization length along the curvature is quite small the addition of these points without changes in the optimisation settings would not have a big effect to the progression of beta. That's because this region then only has low impact on the mean value of beta which is the one value optimized. In addition this would enlarge the optimization dimension by 2 more dimension which would slow down the optimization significantly. Therefore we choose a different method. Since the optimization performed for the curved part only already showed quite good results, we took the optimized *design parameters* from there and adopt them in the new setup. There we fixed the six downstream parameters of these 8 parameters, since they were already positioned quite good. In addition we assumed that the modification at the inflow would not impact the pressure field near the end of the curvature too much. Hence, we only have two free *design points* in the curvature and two in the straight section in front of it which fastens the optimization. In addition we apply a weight to the transition section of the optimization length to enlarge the impact of the new design points. XXX shorten optimisation lengthXX?? This new setup then lead to the beta progression shown in figure XX. here we can see that the negative spike at the beginning of the curvature already recede significantly compared to the previous figure. However it did not disappear completely. XX blabl warum??

XX Procedure für R550deg18 and R100deg90

XX hier noch das Openfoam domain höher ist XX With this simulation setup the optimization

process is started. The first step of the optimization loop is to set new boundary points q . In the beginning (if there are less than XX in GPinit) the points are taken randomly in the given parameter range. In the next step, the domain is built with the new boundary points and the OPENFOAM simulation is started. When the simulation is finished, the postprocessing is performed to compute the current Clauser parameter β and the residual R . As a last step the files and XX are updated. If the optimization was performed for a certain number of steps the new boundary points q are selected with the bayesian optimization. <the optimization runs until ???XX, such that the ZPG is ensured. In the next step the velocity profile for the optimized domain is extracted. The values are extracted from the RANS simulation at the wand normal position which corresponds to the topwall of the DNS domain. This velocity profile is imposed to the DNS setup and then the DNS simulation is performed.

3.4.3 data extraction

- how to extract data from openfoam and impose them on neko domain? Once the optimisation of the OPENFOAM simulation is finished, the next step is to transfer the relevant quantities into the NEKO simulation. As stated before, the domain use for the DNS is smaller in wall-normal direction. Therefore the shape modification from the RANS simulation is not transferred. However, only the quantities influenced by the shape adaptation are transferred. Since the pressure itself is not directly adapted the velocity components build the defining quantities. Therefore the velocity components are extracted at the height where the DNS domain has its upper wall, such that they can be imposed as boundary condition. The extraction of the data from the OPENFOAM simulation is done with PYTHON. First the simulation with the best optimization result is detected and stored in a separate directory. The PYTHON script reads the coordinates from the C/Cx/Cy files and the velocities from the corresponding fields. At a user-defined height the velocity values then are interpolated from the surrounding cells. The interpolated velocity are stored in a csv file. This file is read in the f90 file, where the velocities in the curved section of the DNS domain are defined by these values. XX entweder blending oder übertragung im inflow beschreibenXX

3.5 simulations with ZPG

- application of velocity - domain and all setting similar to reference simulations - blending - interpolation to top wall points

3.6 General workflow

In this section the general workflow followed during this project is presented.

XX Hier noch allgemeines Vorgehen beschreiben sonst zu detailliert im folgenden XX

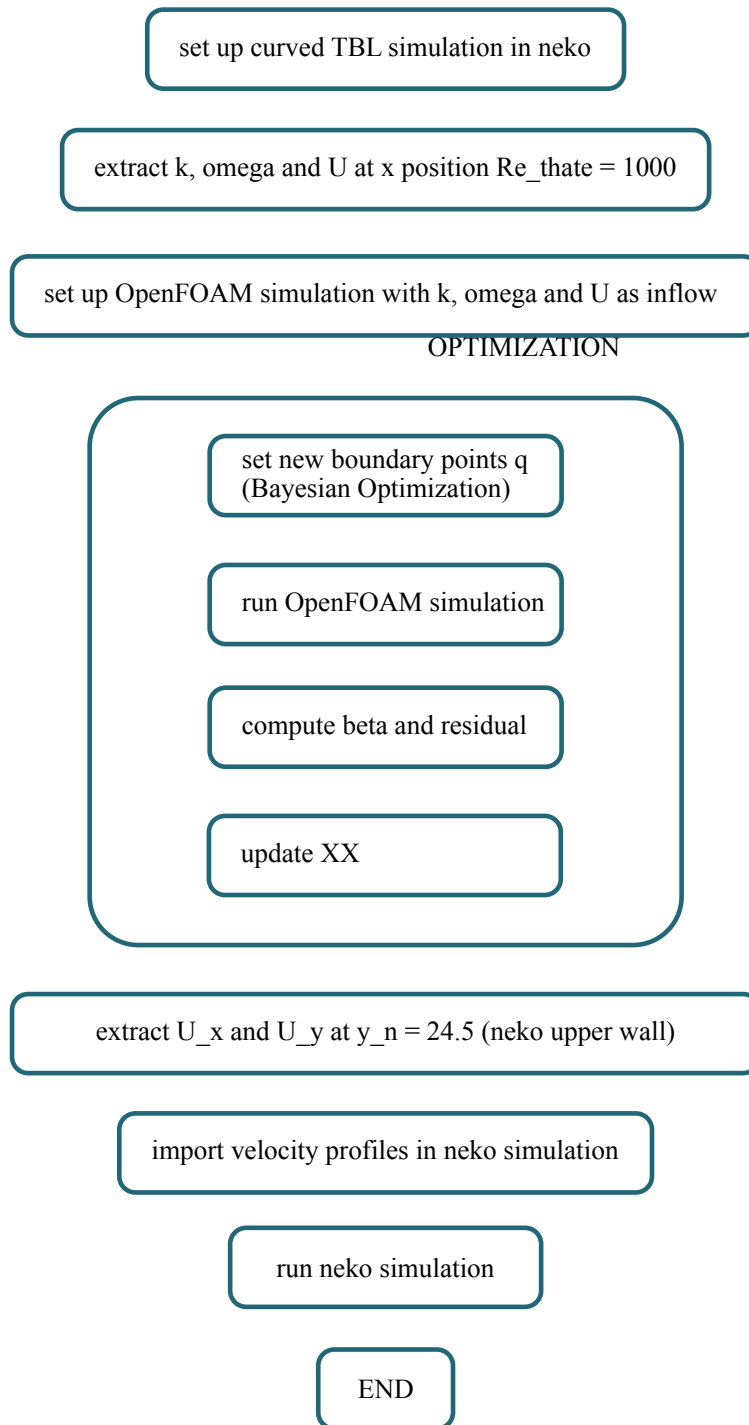


Figure 3.1: Workflow

To get familiar with the NEKO software an example case of the neko example is simulated. We decided to use the channel case since there are some similarities compared to the TBL (see chapter 2). The obtained simulation results as well as the postprocessing procedure are verified

and then validated with reference data. In the following step the set up is switched into a TBL. To do this a new domain with a new mesh is created. At this point a plane TBL is analysed first. A detailed description of the setup can be found in XX. This setup is validated with reference data of other plane TBL simulations eg XX XX. As with the channel simulations, these simulations are used to validate the simulation setup and the postprocessing procedure. In the final part of the project the curved TBL is analysed. Therefore it is necessary to build a simulation setup where a ZPG is ensured such that only curvature effects can be analysed. To create such a setup multiple steps are necessary which are depicted in Figure 3.1. First a working setup of a curved TBL without pressure modification is established in NEKO including the domain size, case settings, vector rotations etc. which are described in detail at XX. With this setup a simulation is performed.

- einarbeiten in neko software -> channel simulations - perform simulations and verify results with reference data
- create TBL domain - perform plane tbl isimulations and validate the results with reference data
- create curved domain - set up neko settings for working simulaiton - copy setup in OpenFOAM
- run optimization
- beta (clauser parameter) at the lower wall as target measures - odjective function: distnace between beta at the bewertungspoints q nad prescribed beta along the lower wall (at the same x position)
- extract results (U, ??) from OpenFOAM - impose these data as boundary condition at top wall in neko simulation - perform neko simulation
- do this for different domains: why these domains?

Bibliography

- J. C. Gillis and J. P. Johnston. Turbulent boundary-layer flow and structure on a convex wall and its redevelopment on a flat wall. *Journal of Fluid Mechanics*, 135:123–153, Oct. 1983. ISSN 0022-1120, 1469-7645. doi: 10.1017/S0022112083002992. URL https://www.cambridge.org/core/product/identifier/S0022112083002992/type/journal_article.
- J. P. Johnston, R. J. Moffat, and W. M. Kays. Experimental Data and Model for the Turbulent Boundary Layer on a Convex, Curved Surface.
- R. N. Meroney and P. Bradshaw. Turbulent boundary-layer growth over a longitudinally curved surface. *AIAA Journal*, 13(11):1448–1453, Nov. 1975. ISSN 0001-1452, 1533-385X. doi: 10.2514/3.7014. URL <https://arc.aiaa.org/doi/10.2514/3.7014>.
- H. Schlichting and K. Gersten. *Boundary-Layer Theory*. Springer Berlin Heidelberg, Berlin, Heidelberg, 2017. ISBN 978-3-662-52917-1 978-3-662-52919-5. doi: 10.1007/978-3-662-52919-5. URL <http://link.springer.com/10.1007/978-3-662-52919-5>.
- C. So and L. Mellor. EXPERIMENTAL INVESTIGATION TURBULENT BOUNDARY LAYERS G CURVED SURFACES.
- R. M. C. So and G. L. Mellor. Experiment on convex curvature effects in turbulent boundary layers. *Journal of Fluid Mechanics*, 60(1):43–62, Aug. 1973. ISSN 0022-1120, 1469-7645. doi: 10.1017/S0022112073000030. URL https://www.cambridge.org/core/product/identifier/S0022112073000030/type/journal_article.

A Einleitung

Refer to equations using the following way. In equation (A.1) we can replace $G(x)$. As seen in Fig. A.1, however, the referred object always needs to come before the corresponding text. We can refer to literature ? as an important citation (see for instance ?, and others).

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

$$G(x) = \sum_0^N \sin^2(x) \tag{A.1}$$

Refer to equations using the following way. In equation (A.1) we can replace $G(x)$. As seen in Fig. A.1, we can refer to ? as an important citation (see for instance ?, and others).

A.1 Important stuff

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.



Figure A.1: The LSTM logo with the latest colours.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit

purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.