


Esercizio W2D1 Packet Tracer

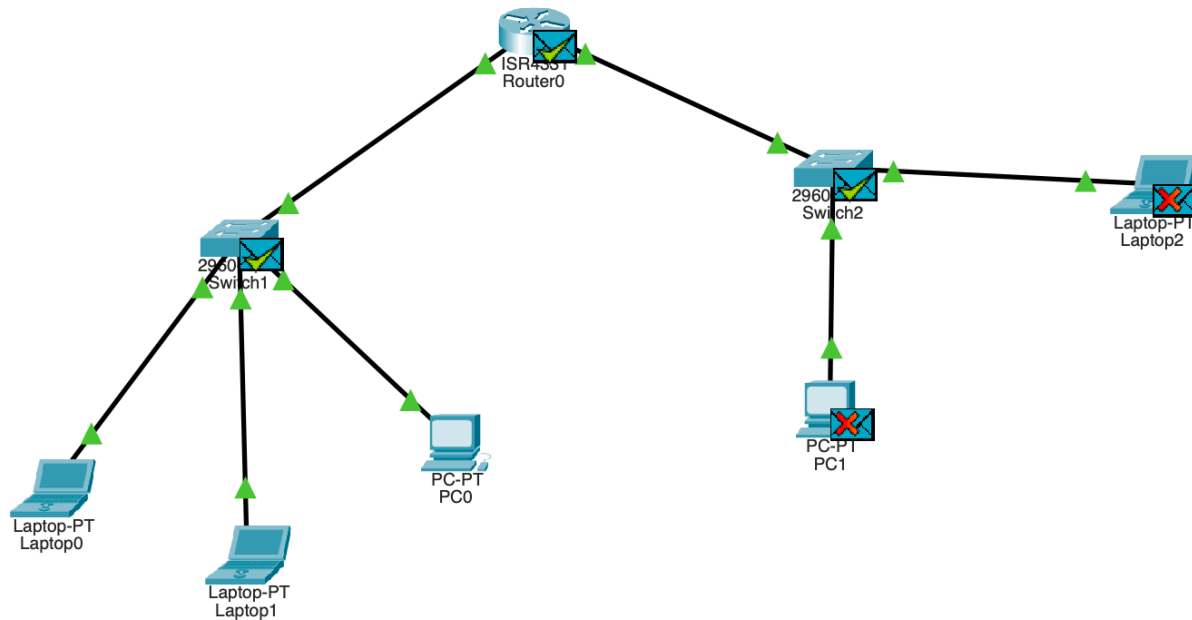

PDU Information at Device: Laptop0

OSI Model Outbound PDU Details

At Device: Laptop0
Source: Laptop0
Destination: Laptop2

In Layers	Out Layers
Layer7	Layer7
Layer6	Layer6
Layer5	Layer5
Layer4	Layer4
Layer3	Layer 3: ICMP Message Type: 8
Layer2	Layer2
Layer1	Layer1

1. The Ping process starts the next ping request.
2. The Ping process creates an ICMP Echo Request message and sends it to the lower process.
3. The source IP address is not specified. The device sets it to the port's IP address.
4. The device sets TTL in the packet header.
5. The destination IP address 192.168.200.100 is not in the same subnet and is not the broadcast address.
6. The default gateway is not set. The device drops the packet.

Challenge Me << Previous Layer Next Layer >>

PDU Information at Device: Switch1

[OSI Model](#)
Outbound PDU Details

At Device: Switch1
Source: Switch1
Destination: STP Multicast Address

In Layers

Layer7
Layer6
Layer5
Layer4
Layer3
Layer2
Layer1

Out Layers

Layer7
Layer6
Layer5
Layer4
Layer3

Layer 2: IEEE 802.3 Header
0002.4A85.4204 >>
0180.C200.0000 LLC STP BPDU

Layer 1: Port(s): FastEthernet0/1
FastEthernet0/2 FastEthernet0/3
FastEthernet0/4

1. The STP process sends out a configuration BPDU.
2. The device encapsulates the PDU into an Ethernet frame.
3. The Switch unicasts the frame out to the access port.
4. The STP process sends out a configuration BPDU.
5. The device encapsulates the PDU into an Ethernet frame.
6. The Switch unicasts the frame out to the access port.
7. The STP process sends out a configuration BPDU.
8. The device encapsulates the PDU into an Ethernet frame.
9. The Switch unicasts the frame out to the access port.
10. The STP process sends out a configuration BPDU.
11. The device encapsulates the PDU into an Ethernet frame.
12. The Switch unicasts the frame out to the access port.

Challenge Me

<< Previous Layer

Next Layer >>

PDU Information at Device: Switch2

[OSI Model](#)
Outbound PDU Details

At Device: Switch2
Source: Switch2
Destination: STP Multicast Address

In Layers

Layer7
Layer6
Layer5
Layer4
Layer3
Layer2
Layer1

Out Layers

Layer7
Layer6
Layer5
Layer4
Layer3

Layer 2: IEEE 802.3 Header
0060.3EE2.8E03 >>
0180.C200.0000 LLC STP BPDU

Layer 1: Port(s): FastEthernet0/1
FastEthernet0/2 FastEthernet0/3

1. The STP process sends out a configuration BPDU.
2. The device encapsulates the PDU into an Ethernet frame.
3. The Switch unicasts the frame out to the access port.
4. The STP process sends out a configuration BPDU.
5. The device encapsulates the PDU into an Ethernet frame.
6. The Switch unicasts the frame out to the access port.
7. The STP process sends out a configuration BPDU.
8. The device encapsulates the PDU into an Ethernet frame.
9. The Switch unicasts the frame out to the access port.

Challenge Me

<< Previous Layer

Next Layer >>