



RADIOGRAPHIC TESTING PLAN — FLAT PLATE DOUBLE-V BUTT WELD (PL 25mm ALLOY STEEL)

WELD CROSS-SECTION (DOUBLE-VEE GROOVE)

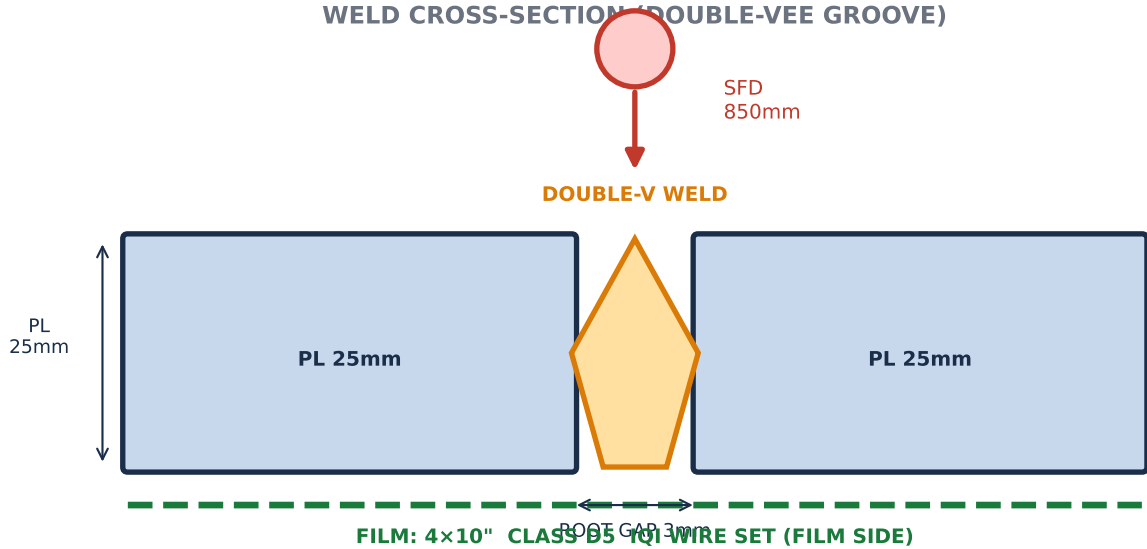

PLAN VIEW — 5-SHOT LAYOUT

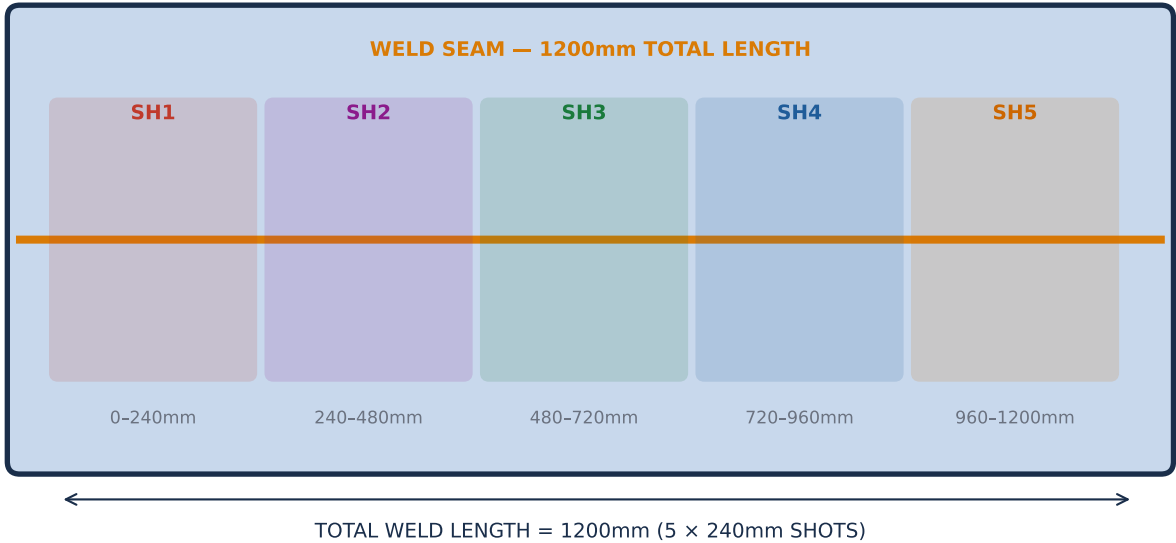

EXPOSURE SCHEDULE

SHOT	LOCATION (mm)	TECHNIQUE	kV	mA	SFD(mm)	FILM	TIME(min)
1	0 - 240	SWSI	140	4.0	850	4×10 D5	7
2	240 - 480	SWSI	140	4.0	850	4×10 D5	7
3	480 - 720	SWSI	140	4.0	850	4×10 D5	7
4	720 - 960	SWSI	140	4.0	850	4×10 D5	7
5	960 - 1200	SWSI	140	4.0	850	4×10 D5	7

NOTES:

- Per ASME Sec IX / AWS D1.1 — butt weld RT procedure
- Material: ASTM A387 Gr.11 Cl.2 Alloy Steel (1.25Cr-0.5Mo)
- Film density range: 2.0 – 3.5 per ASTM E94
- IQI: ASTM E747 wire set, 2T sensitivity, film-side placement
- 20mm minimum overlap between adjacent shots
- Preheat 150°C per ASME Sec IX P-No.4 requirements

NDT INSPECTION SERVICES

A387 Gr.11 Alloy Steel — PL 25mm Butt Weld

Double-V Butt Weld RT Plan — 5-Shot SWSI

ACCEPTANCE STD: ASME Sec IX / AWS D1.1

Date: 2025-03-15 Rev: A

DRAWING NUMBER

RT-TEST-FLAT-BUTT-001

MATERIAL: ASTM A387 Gr.11 Cl.2

SCALE: 1:5 SHEET: 1 of 1

NDT STANDARD

ASME Sec V Art. 2

ASTM E94

DISTRIBUTION: UNRESTRICTED