





Gruppen - Übersicht

Group Review

16 V 956 TB .2
 16 V 1163 TB .2

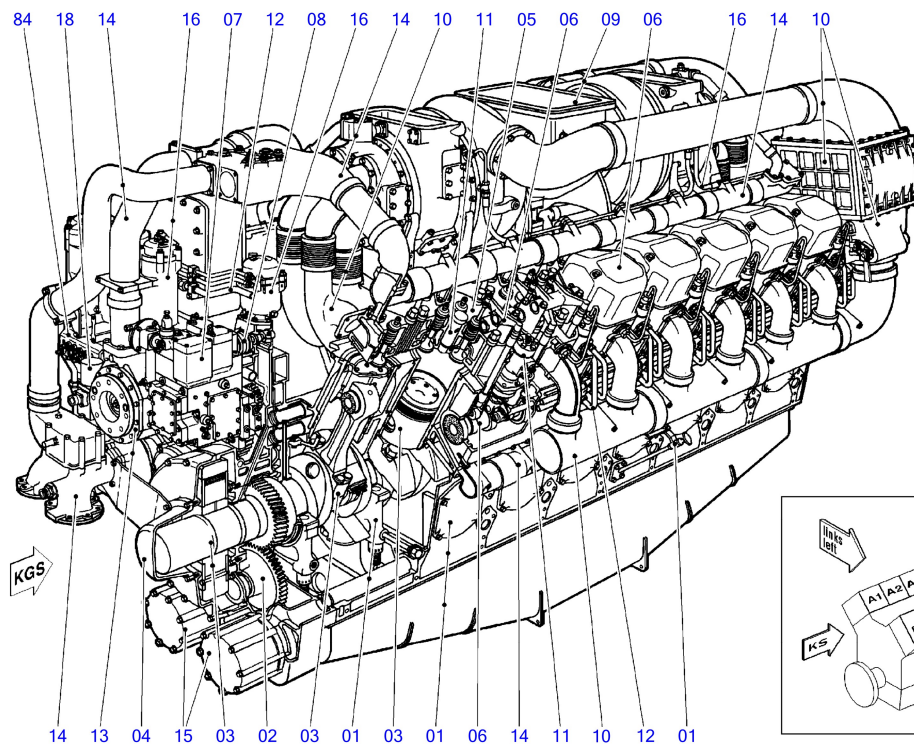

Gilt sinngemäß auch für
 Applies analogously to
 12 V 956 TB .2
 12 V 1163 TB .2
 20 V 956 TB .2
 20 V 1163 TB .2

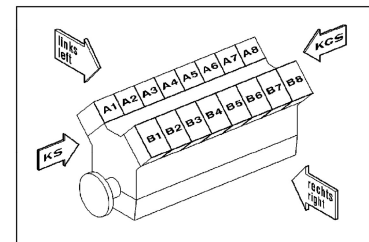

E 000 5723 a0


- | FG | FG DESIGNATION |
|----|-----------------------------------|
| 01 | CRANKCASE |
| 02 | GEAR TRAIN |
| 03 | RUNNING GEAR |
| 04 | COVER PLATES AT KGS |
| 05 | CYLINDER HEAD |
| 06 | CONTROL SYSTEM |
| 07 | ENGINE GOVERNOR |
| 08 | GOVERNOR LINKAGE |
| 09 | EXHAUST TURBOCHARGER |
| 10 | CHARGE AIR PIPING-EXHAUST PIPING |
| 11 | FUEL INJECTION EQUIPMENT |
| 12 | FUEL SYSTEM |
| 13 | COOLANT PUMP |
| 14 | COOLANT SYSTEM |
| 15 | OIL PUMP |
| 16 | OIL SYSTEM |
| 17 | DRIVE FOR SPEED MONITORING |
| 18 | STARTING EQUIPMENT |
| 19 | ENGINE MOUNTING |
| 84 | MONITORING EQUIPMENT |
| 86 | ACCESSORIES (ELECTRIC, PNEUMATIC) |

FG FG DESIGNATION


87 ENGINE AND GEARBOX CONTROL

88 ACCESSORIES (MECHANICAL)


01
054903

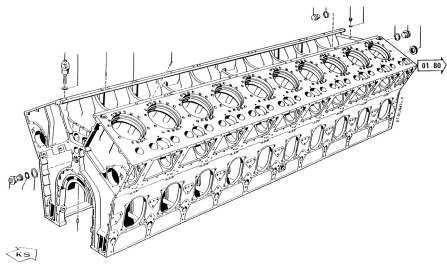


01
055201

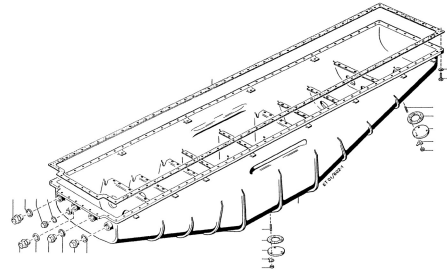


01
054903

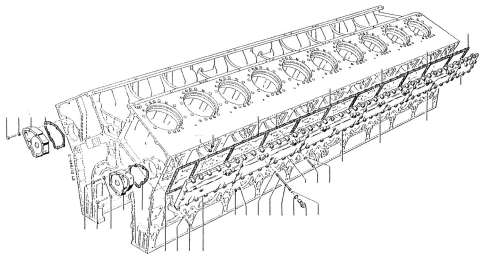


01
055402

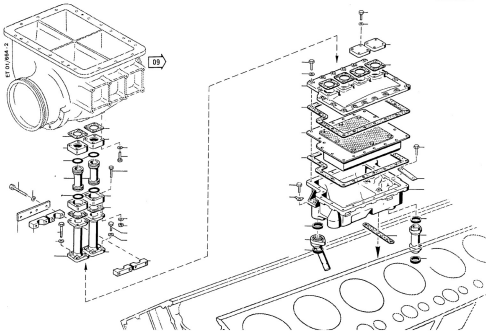


01
054903



01
057202



01
055304

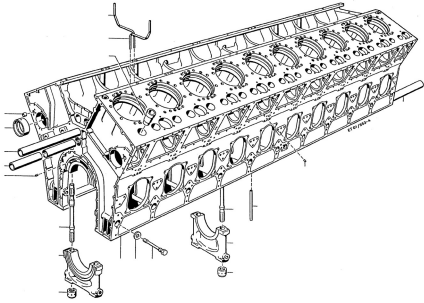



**M.A.N. Maybach Mercedes-Benz
Dieselmotor**

Motoren- und Turbinen-Union
Friedrichshafen GmbH

Typ	
Motor Nr.	
Baujahr	
Leistung	
Drehzahl	1/min
Gewicht	kg

1





Warning

Do not open hot crankcase for at least
10 minutes after shutdown of engine.
Do not restart overheated engine before
cause of overheating has been remedied.

3

Vor Tausch des Filtereinsatzes unbedingt Ölschlamm ablassen.

Prior to replacement of filter insert oil sludge must positively be drained.

Avant de remplacer l'élément filtrant, il faut absolument vidanger les crasses d'huile.

Antes de substituir o elemento filtrante, é indispensável despejar a lama de óleo.

Antes de cambiar el elemento filtrante, es imprescindible evacuar el fodo de aceite.

Prima di sostituire la cartuccia filtrante è assolutamente necessario di scaricare la morchia.

5

ET 01/660-2

Betriebsstoffe nur nach MTU-Vorschrift Nr. 1061

Only use Fluids and Lubricants as per MTU Specification No.1061


Utiliser les ingrédients prescrits par Publication MTU No. 1061

Utilizar solamente materias de servicio seg. Publ. MTU No.1061

Só utilizar agentes de funcionamento seg. Publ. MTU No. 1061


Impiegare solo materiali di consumo sec. Pubbl. MTU No. 1061

4




6


POS.	PART NO.	DESIGNATION	QTY.	UNITS	FN	MEASUREMENT	STANDARD	DES. ADDITION
01	700425000005	INSTRUCTION PLATE	1	EA		04		
03	700425000039	INSTRUCTION PLATE	1	EA		36		
04	700425000050	INSTRUCTION PLATE	1	EA	NB	40		
05	700425000051	INSTRUCTION PLATE	1	EA	NB	41		
06	700425000025	INSTRUCTION PLATE	1	EA		14		

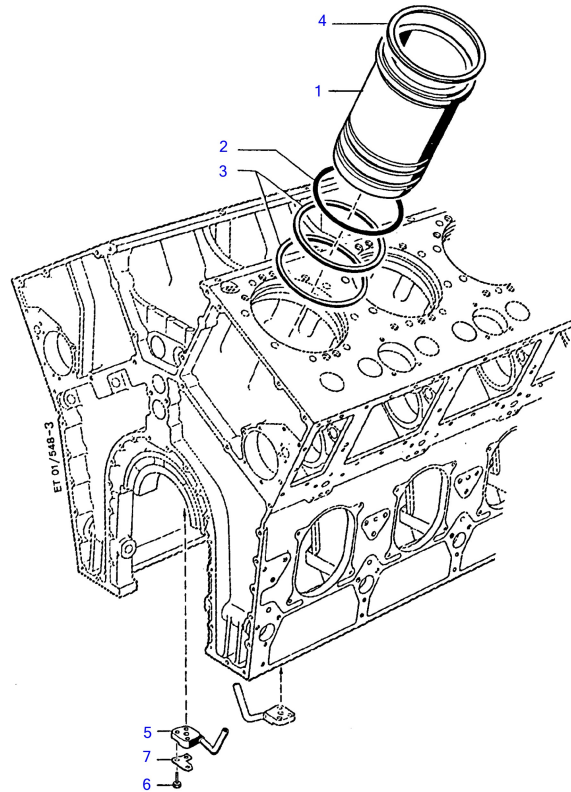


POS.	PART NO.	DESIGNATION	QTY.	UNITS	FN	MEASUREMENT	STANDARD	DES. ADDITION
01	5800111310	CYLINDER LINER	20	EA	M			
02	5909970040	SEALING RING	20	EA				
03	161A15027/1	GASKET	40	EA				
04	5800161319	SEALING RING	20	EA	M			
05	5800100651	INJECTION NOZZLE	20	EA	S			
06	000933008114	SCREW	60	EA		M 8 X 22		
07	5800180273	TAB WASHER	20	EA				

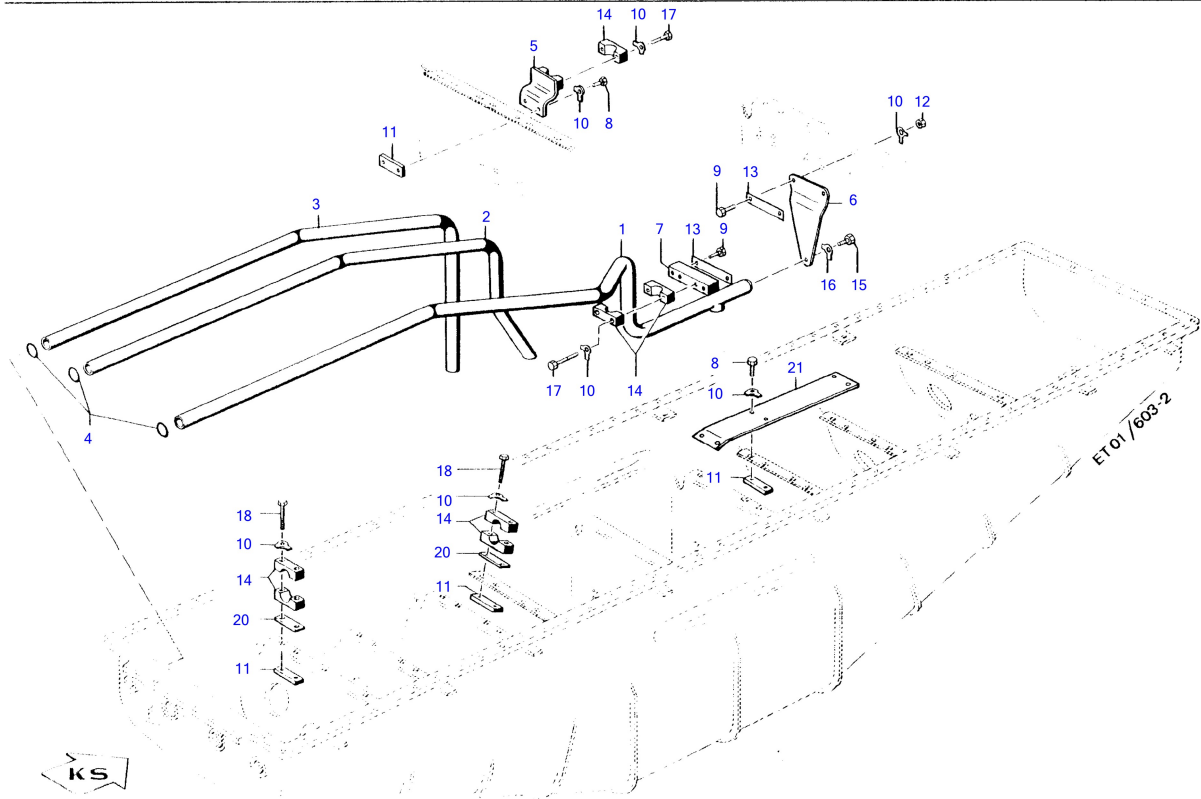

POS.	PART NO.	DESIGNATION	QTY.	UNITS	FN	MEASUREMENT	STANDARD	DES. ADDITION
01	5801801251	SUCTION PIPE	1	EA	S			
02	5801861925	OIL EXTRACTION PIPE	1	EA				
03	5801861825	OIL EXTRACTION PIPE	1	EA				
04	700429035000	O-RING	3	EA		35,5 X 4		
05	5801800040	ALARM SWITCH	2	EA	S			
06	5801860540	ALARM SWITCH	1	EA				
07	5801860640	ALARM SWITCH	1	EA				
08	000933008108	SCREW	24	EA		M 8 X 20		
09	000933008117	SCREW	4	EA		M 8 X 30		
10	700292008400	TAB WASHER	36	EA		8,4		
11	5800140073	LIFTING STRAP	18	EA				
12	000934008008	HEX NUT	2	EA		M 8		
13	5900140373	TAB WASHER	3	EA				
14	700325035101	PIPE HALF-CLAMP	16	EA		1/2 D 9 - 35		
15	000933010089	SCREW	1	EA		M 10 X 20		
16	700290010500	TAB WASHER	1	EA		10,5		
17	000931008046	SCREW	4	EA		M 8 X 35		
18	000931008190	SCREW	14	EA		M 8 X 70		
20	5801860084	SHIM	6	EA	WW			
20A	5801860184	SHIM	6	EA	WW			
20B	5801860284	SHIM	6	EA	WW			
21	5800140095	STIFFENER	4	EA				

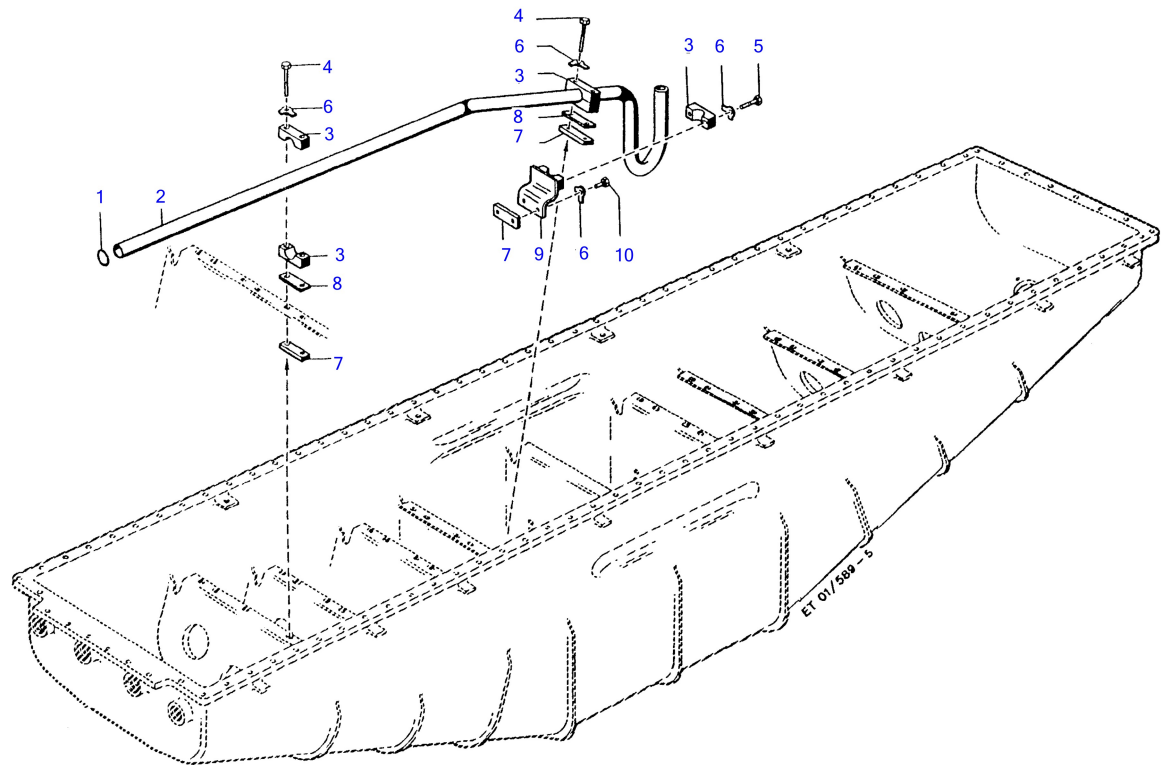

POS.	PART NO.	DESIGNATION	QTY.	UNITS	FN	MEASUREMENT	STANDARD	DES.	ADDITION
01	700429035000	O-RING	1	EA		35,5 X 4			
02	5801871301	TRANSVERSE EXHAUST PIPE	1	EA					
03	700325035101	PIPE HALF-CLAMP	5	EA		1/2 D 9 - 35			
04	000931008190	SCREW	4	EA		M 8 X 70			
05	000931008046	SCREW	2	EA		M 8 X 35			
06	700290008400	TAB WASHER	10	EA		8,4			
07	5800140073	LIFTING STRAP	3	EA					
08	5801860084	SHIM	1	EA		WW			
08A	5801860184	SHIM	1	EA		WW			
08B	5801860284	SHIM	1	EA		WW			
09	5801800040	ALARM SWITCH	1	EA		S			
10	000933008108	SCREW	2	EA		M 8 X 20			

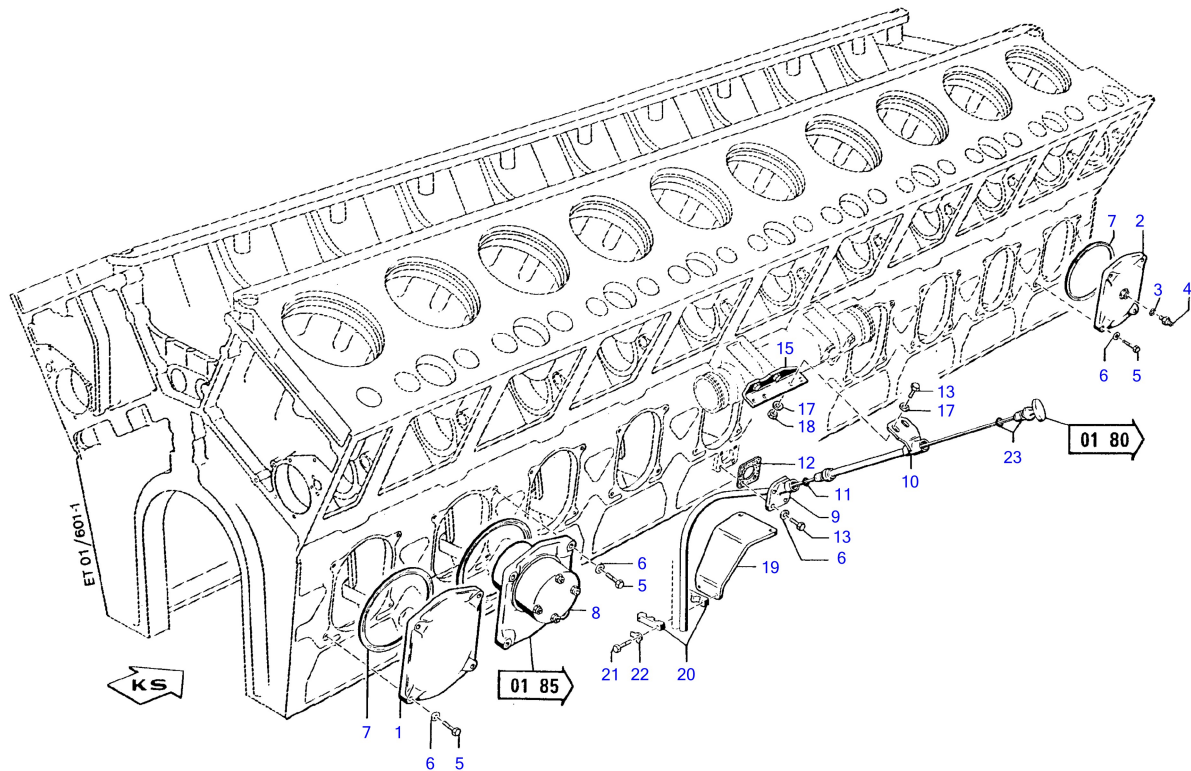

POS.	PART NO.	DESIGNATION	QTY.	UNITS	FN	MEASUREMENT	STANDARD	DES. ADDITION
01	5800110432	INSPECTION PORT COVER	15	EA				
02	5800100215	INSPECTION PORT COVER	1	EA				
03	007603022102	SEALING RING	1	EA		A 22 X 27		
04	915013016002	EXHAUST PIPE NECK	1	EA		16		
05	000933010093	SCREW	80	EA		M 10 X 35		
06	000137010202	SPRING WASHER	88	EA		B 10		
07	0029971248	RUBBER RING	20	EA				
08	0000180529	SAFETY VALVE	4	EA	P			
09	5800100566	GUIDE TUBE	2	EA	S			
10	5800100366	GUIDE TUBE	2	EA	S			
11	700294015000	O-RING	2	EA		15 X 3		
12	5800180080	GASKET	2	EA				
13	000933010035	SCREW	12	EA		M 10 X 25		
15	5800181240	ALARM SWITCH	2	EA				
17	000125010524	COVER DISC	8	EA		A 10,5		
18	000934010005	HEX NUT	4	EA		M 10		
19	5800181440	ALARM SWITCH	1	EA				
20	700325018105	PIPE HALF-CLAMP	2	EA		2/2 D 9 - 18		
21	000931008058	SCREW	2	EA		M 8 X 40		
22	700292008400	TAB WASHER	2	EA		8,4		
23	5800101272	OIL DIPSTICK	2	EA				