





Before using this Quick Reference, read and observe the detailed Rolls-Royce Solutions overall documentation on BlueVision!
In particular, all safety instructions in the overall documentation must be observed!

Cable channels and entries

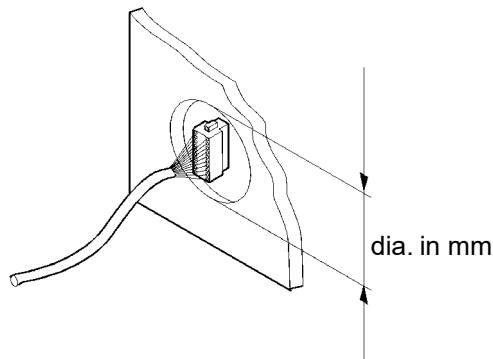

From	To	min. dia. in mm
Engine room	Main control stand (CCP1)	100
Main control stand (CCP1)	Main control stand (console front)	60
Main control stand (CCP1)	Slave control stand 1	60
Slave control stand (CCP2 or CCP3)	Slave control stand 2	60

Installing cables between ECS-5 and MCS-5

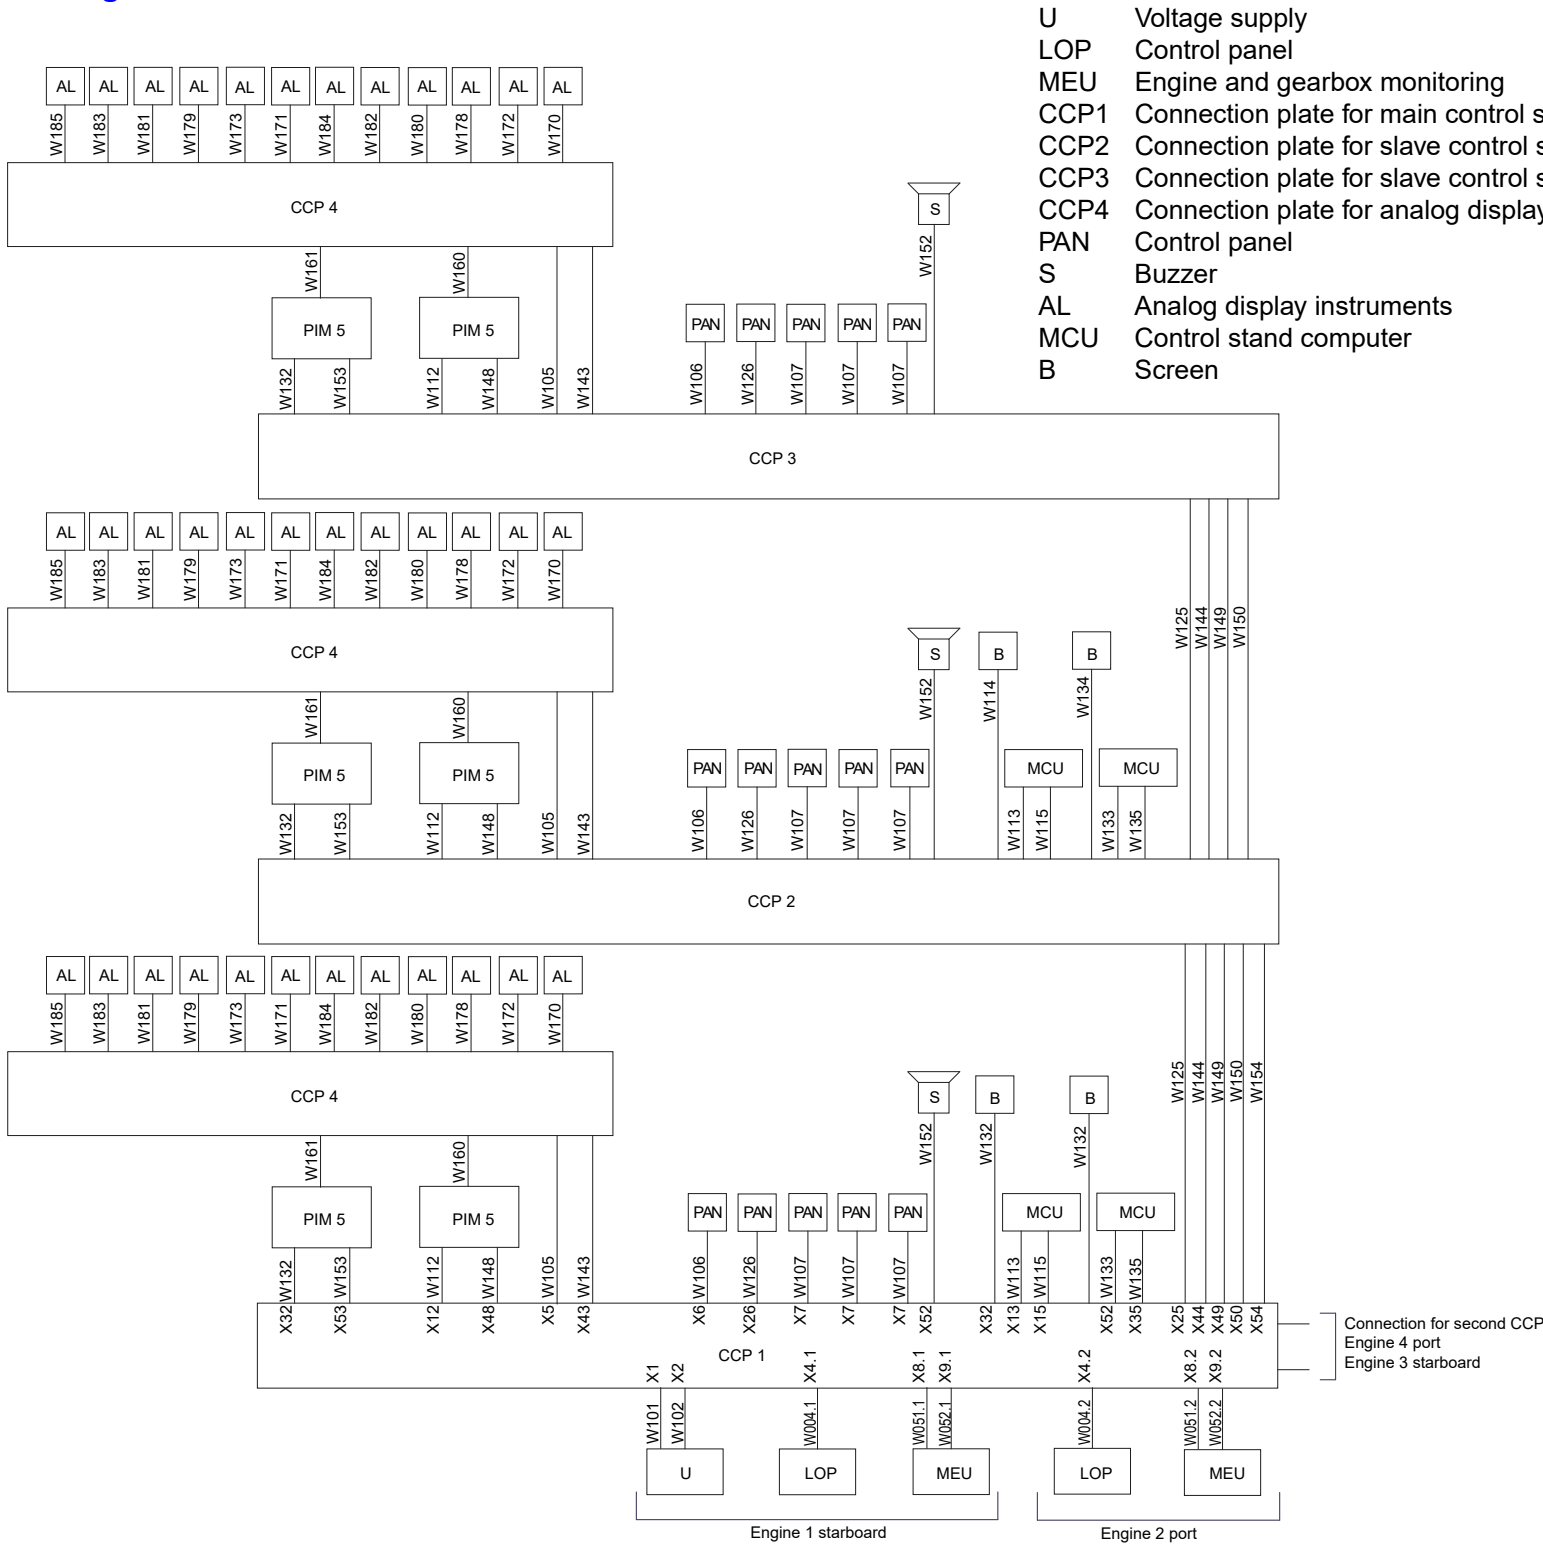



Before using this Quick Reference, read and observe the detailed Rolls-Royce Solutions overall documentation on BlueVision!
In particular, all safety instructions in the overall documentation must be observed!

Connection of engine room to control stand

Note: All power supply ground potentials from the engine room and control stands must be connected!

Main voltage supply (shipyard scope)

Cable	to connection plate	Connector
-W101	CCP 1/2/3	X1


Emergency power supply (shipyard scope)

Cable	to connection plate	Connector
-W101	CCP 1/2/3	X1


Engine and gearbox monitoring

Cable	from connector	to	Connector Engine 1	Connector Engine 2
-W004	LOP -X4	CCP 1	-X4.1	-X4.2
-W051	MEU -X8	CCP 1	-X8.1	-X8.2
-W052	MEU -X9	CCP 1	-X9.1	-X9.2

Connecting MCU 8/11/12

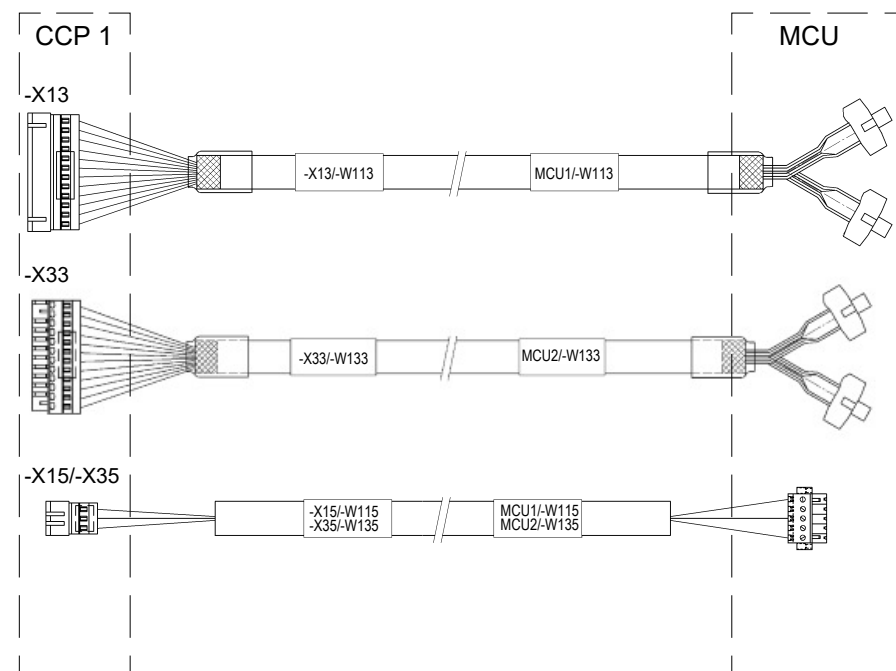


Connecting MCU 14

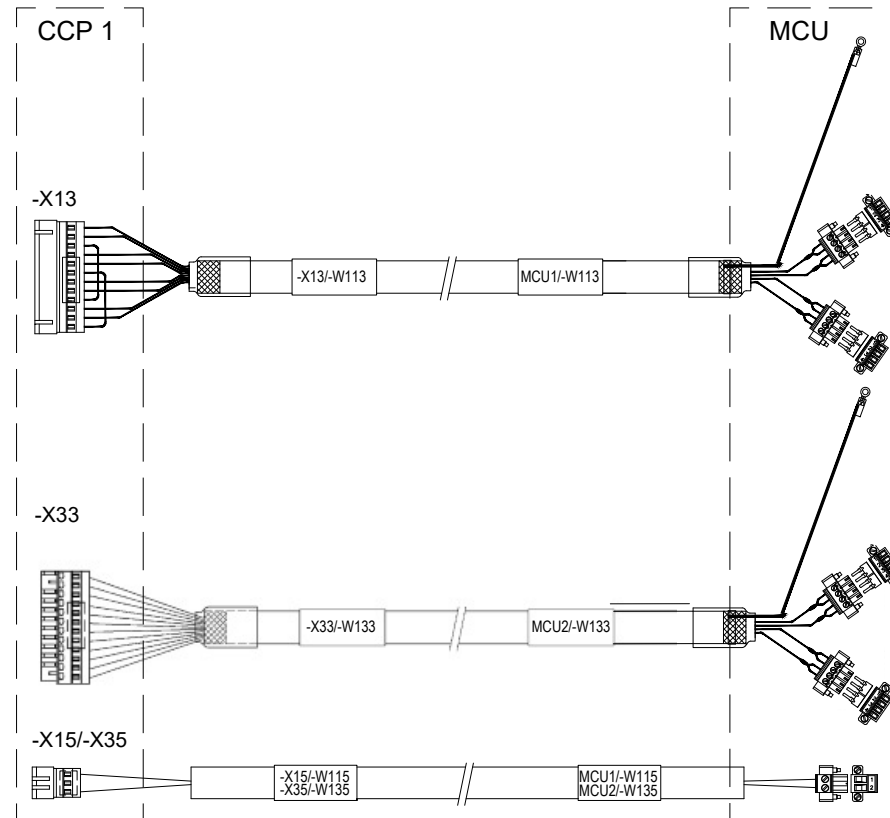

Connecting control panel PANs


Engine 1 (Start/Stop/Emergency stop) - PAN 3/4 and PAN 7/8

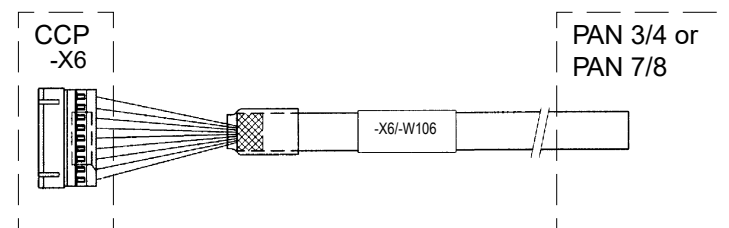

Cond. no.	Cond. color	PAN PIN assignment	Signal
1	white	1	+24VDC
2	brown	2	GND
3	green	3	PE
5	gray	61	CAN_H
6	pink	62	CAN_L
7	blue	61	CAN_H
8	red	62	CAN_L
9	black	51	+24V E-stop
10	purple	54	E-stop

-X6 PIN assignment	Cond. no.	Cond. color	PAN PIN assignment	Signal
1	1	white	1	+24VDC
2	2	brown	2	GND
3	3	green	3	PE
4	5	gray	61	CAN_H
5	6	pink	62	CAN_L
6	7	blue	61	CAN_H
7	8	red	62	CAN_L
8	9	black	51	+24V E-stop
9	10	purple	54	E-stop


Engine 2 (Start/Stop/Emergency stop) - PAN 3/4 and PAN 7/8

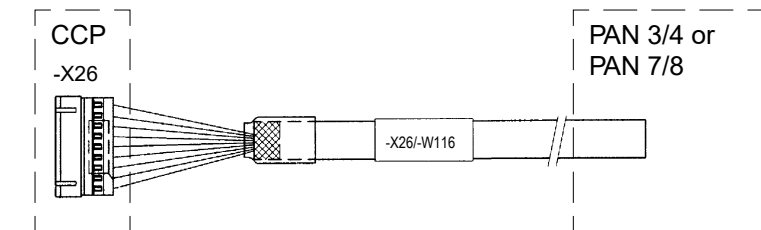

Cond. no.	Cond. color	PAN PIN assignment	Signal
1	white	1	+24VDC
2	brown	2	GND
3	green	3	PE
5	gray	61	CAN_H
6	pink	62	CAN_L
7	blue	61	CAN_H
8	red	62	CAN_L
9	black	51	+24V E-stop
10	purple	54	CAN_L

X26 PIN assignment	Cond. no.	Cond. color	PAN PIN assignment	Signal
1	1	white	1	+24VDC
2	2	brown	2	GND
3	3	green	3	PE
4	5	gray	61	CAN_H
5	6	pink	62	CAN_L
6	7	blue	61	CAN_H
7	8	red	62	CAN_L
8	9	black	51	+24V E-stop
9	10	purple	54	CAN_L

Dimming / Alarm - PAN 1/2 and PAN 5/6

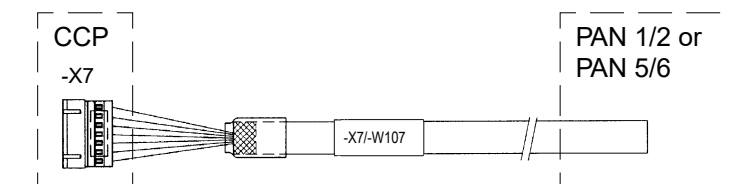

Cond. no.	Cond. color	PAN PIN assignment	Signal
1	white	1	+24VDC
2	brown	2	GND
3	green	3	PE
5	gray	61	CAN_H
6	pink	62	CAN_L
7	blue	61	CAN_H
8	red	62	CAN_L

-X7 PIN assignment	Cond. no.	Cond. color	PAN PIN assignment	Signal
1	1	white	1	+24VDC
2	2	brown	2	GND
3	3	green	3	PE
4	5	gray	61	CAN_H
5	6	pink	62	CAN_L
6	7	blue	61	CAN_H
7	8	red	62	CAN_L



Before using this Quick Reference, read and observe the detailed Rolls-Royce Solutions overall documentation on BlueVision!
In particular, all safety instructions in the overall documentation must be observed!

Connecting buzzer



-X52 PIN assignment	Cond. no.	Cond. color	Buzzer PIN assignment	Signal
1	1	white	+	Buzzer
2	2	brown	-	GND


Connecting keyboard

	MCU8	MCU11/12	MCU14
-W612/-W622	KEYBOARD	KEYBOARD	USB3


Connecting trackball

	MCU8	MCU11/12	MCU14
-W611/-W621	MOUSE	MOUSE	USB1


Connecting monitor

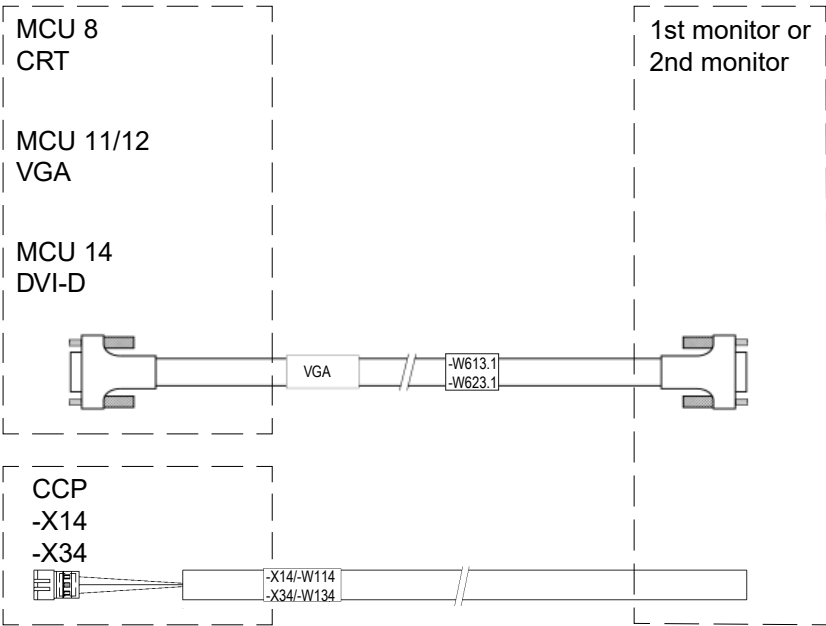

Connecting printer

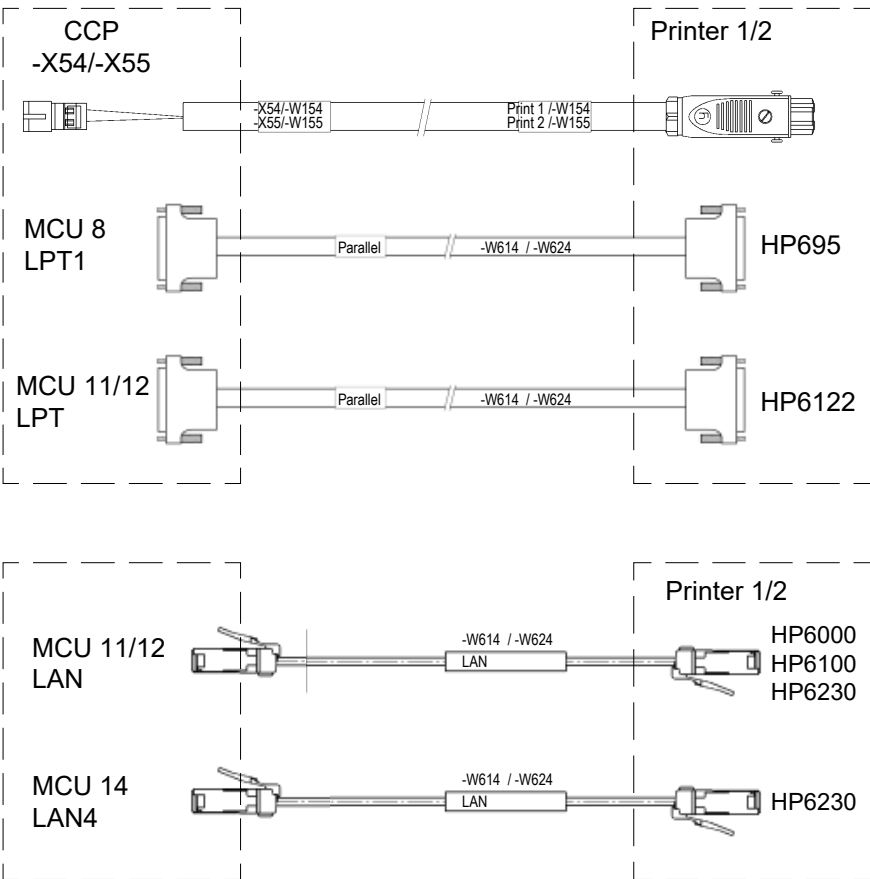


Connecting engine speed instrument

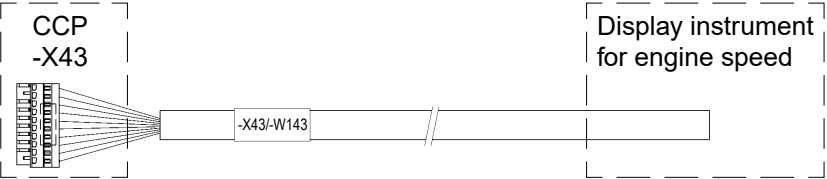

-X43 PIN assignment	Cond. no.	Conductor color	Analog display PIN assignment		Signal
			Engine 1	Engine 2	
1	1	white	1		n-Eng +
2	2	brown	-		n-Eng -
3	3	green	L+		UDim +
4	4	yellow	L-		UDim-
5	5	gray	+		24V DC
6	6	pink		1	n-Eng +
7	7	blue		-	n-Eng -
8	8	red		L+	UDim +
9	9	black		L-	UDim-
10	10	purple		+	24V DC

Connecting shaft speed instrument

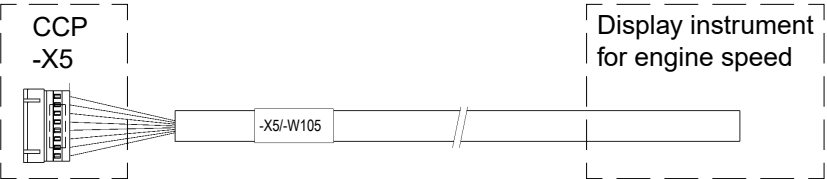

-X5 PIN assignment	Cond. no.	Conductor color	Analog display PIN assignment		Signal
			Engine 1	Engine 2	
1	1	white	+		n-Shaft +
2	2	brown	-		n-Shaft -
3	3	green	L1+		UDim +
4	4	yellow	L2-		UDim-
5	5	gray		+	n-Shaft +
6	6	pink		-	n-Shaft -
7	7	blue		L1+	UDim +
8	8	red		L2-	UDim-