

Maintenance Schedule

Diesel Engine

EPA/CARB

10V1600A70

12V1600A50

12V1600A70

Application Group 5B

MSE50170/01E



Power. Passion. Partnership.

Engine model	kW/cyl.	Application group
10V1600A70	61 kW/cyl.	5B, Continuous operation, variable
12V1600A50	53 kW/cyl.	5B, Continuous operation, variable
12V1600A70	61 kW/cyl.	5B, Continuous operation, variable

Table 1: Applicability

Table of Contents

1	Maintenance Schedule	
1.1	Preface	4
1.2	Allocation matrix application group 5B	5
1.3	Maintenance schedule matrix 18,000 h	7
1.4	Maintenance tasks 18,000 h	8
1.5	Maintenance schedule matrix 15,000 h	9
1.6	Maintenance tasks 15,000 h	10
1.7	Maintenance schedule matrix 12,000 h	11
1.8	Maintenance tasks 12,000 h	12
1.9	Maintenance schedule matrix 9,000 h	13
1.10	Maintenance tasks 9,000 h	14

1 Maintenance Schedule

1.1 Preface

The maintenance schedule is applicable to products certified in accordance with U.S. emissions regulations and operated in the area of applicability of these regulations.

Information about the latest maintenance schedule is available at: <http://www.mtu-online.com>.

The following instructions must be observed for these products:

The maintenance schedule is an integral part of the emissions certification. Nonobservance of the maintenance instructions can result in violation of the statutory emission specifications. Modification or removal of mechanical or electronic components or the installation of additional components as well as the execution of calibration processes that might affect the emission characteristics of the product are prohibited by emission regulations. Emission-related components, e.g. control units, sensors, cylinder heads, injectors and exhaust flaps can only be serviced, replaced or repaired if components approved by MTU or equivalent components are used.

The maintenance system for MTU products is based on a preventive maintenance concept. Preventive maintenance facilitates advance operational planning and ensures a high level of equipment availability. The maintenance intervals and the scope of required maintenance activities are the result of operational experience and therefore represent recommendations. Severe operating and ambient conditions may require additional maintenance work and/or modification of the maintenance intervals.

Maintenance activities are specified with intervals based on hours in operation and time limits. Whichever value is reached first shall apply.

The individual maintenance intervals are classified in accordance with the qualification levels QL1 to QL4.

QL1: Operational monitoring and maintenance work which does not require disassembly of the product.

QL2: Exchange of components and parts (corrective only, not part of the maintenance schedule).

QL3: Maintenance work which requires partial disassembly of the product.

QL4: Maintenance work which requires complete disassembly of the product.

Additional notes on maintenance and preservation:

For change intervals for fluids and lubricants as well as for preservation specifications, refer to the relevant instructions of the component manufacturers and the MTU Fluids and Lubricants Specifications. The latest version for drive systems is available online at: <http://www.mtu-online.com>, and for power generation systems at: <http://www.mtuonsiteenergy.com>.

Components which are not listed in this maintenance schedule must be serviced in accordance with Manufacturer's Instructions.

1.2 Allocation matrix application group 5B

Load profile		V 1600 Cx0 / Ax0						
Load %	Time %	Load factor %	Load indicator %	0 - 55 kW/cyl.	56 - 65 kW/cyl.			
110 ₍₁₀₀₋₁₁₀₎	—	0 - 31	≤ 17	18,000	15,000	—	—	Standard
100 ₍₉₀₋₁₀₀₎	12							
90 ₍₈₀₋₉₀₎	12							
80 ₍₆₅₋₈₀₎	—							
65 ₍₅₀₋₆₅₎	—							
50 ₍₃₀₋₅₀₎	—							
30 ₍₅₋₃₀₎	16							
Idle ₍₀₋₅₎	60							
110 ₍₁₀₀₋₁₁₀₎	—	32 - 35	≤ 19	18,000	15,000	—	—	
100 ₍₉₀₋₁₀₀₎	17							
90 ₍₈₀₋₉₀₎	—							
80 ₍₆₅₋₈₀₎	13							
65 ₍₅₀₋₆₅₎	—							
50 ₍₃₀₋₅₀₎	—							
30 ₍₅₋₃₀₎	15							
Idle ₍₀₋₅₎	55							
110 ₍₁₀₀₋₁₁₀₎	—	36 - 45	≤ 32	15,000	12,000	—	—	
100 ₍₉₀₋₁₀₀₎	26							
90 ₍₈₀₋₉₀₎	15							
80 ₍₆₅₋₈₀₎	—							
65 ₍₅₀₋₆₅₎	—							
50 ₍₃₀₋₅₀₎	—							
30 ₍₅₋₃₀₎	12							
Idle ₍₀₋₅₎	47							
110 ₍₁₀₀₋₁₁₀₎	—	46 - 55	≤ 41	12,000	9,000	—	—	
100 ₍₉₀₋₁₀₀₎	35							
90 ₍₈₀₋₉₀₎	15							
80 ₍₆₅₋₈₀₎	—							
65 ₍₅₀₋₆₅₎	—							
50 ₍₃₀₋₅₀₎	—							
30 ₍₅₋₃₀₎	15							
Idle ₍₀₋₅₎	35							

TM-ID: 000054460 - 002

Table 2: Allocation matrix application group 5B

V 1600 Cx0 / Ax0							
Load profile		Load factor %	Load indicator %	0 - 55 kW/cyl.			
Load %	Time %						
110 ₍₁₀₀₋₁₁₀₎	—	56 - 65	≤ 51	9,000	—	—	—
100 ₍₉₀₋₁₀₀₎	44						
90 ₍₈₀₋₉₀₎	17						
80 ₍₆₅₋₈₀₎	—						
65 ₍₅₀₋₆₅₎	—						
50 ₍₃₀₋₅₀₎	—						
30 ₍₅₋₃₀₎	15						
Idle ₍₀₋₅₎	24						

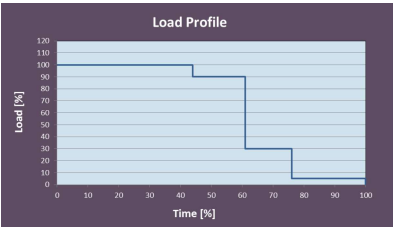


Table 3: Allocation matrix application group 5B

1.3 Maintenance schedule matrix 18,000 h

0-18,000 Operating hours

Task	Limit	Operating hours [h]																												
		Daily	1,000	2,000	3,000	4,000	4,500	5,000	6,000	7,000	8,000	9,000	10,000	11,000	12,000	13,000	13,500	14,000	15,000	16,000	17,000	18,000								
Engine																														
W0800	-																													
W1008	2 a																													
W0500	-	X																												
W0501	-	X																												
W0506	-	X																												
W0507	-	X																												
W1001	2 a		X	X	X	X		X	X	X	X	X	X	X	X	X		X	X	X	X	X								
W1675	2 a		X	X	X	X		X	X	X	X	X	X	X	X	X		X	X	X	X	X								
W1019	-			X		X			X		X		X		X			X		X		X								
W1716	-				X				X			X		X				X			X									
W1207	2 a		X		X				X			X			X				X			X								
W1003	2 a				X				X			X			X				X			X								
W8638	-					X					X					X						X								
W1525	6 a								X						X							X								
W1526	6 a								X						X							X								
W1298	9 a								X						X							X								
W1178	9 a								X						X							X								
W1006	9 a								X						X							X								
W1636	9 a								X						X							X								
W1660	-										X											X								
W1812	5 a										X											X								
W1055	6 a										X											X								
W8637	6 a										X											X								
W1041	9 a										X											X								
W1672	9 a																					X								
W3148	18 a																					X								
w = weeks m = months a = years																														