



MANUFACTURING NOTES:

- 1. THIS COMPONENT IS IDEALLY SUITED FOR PRODUCTION VIA CNC MILLING AND DRILLING FROM BAR STOCK OR PLATE MATERIAL, LEVERAGING ITS INHERENT SYMMETRY TO POTENTIALLY OPTIMIZE FIXTURING.
- 2. THE PRESENCE OF HOLES ALONG THREE ORTHOGONAL AXES (X, Y, Z) WILL NECESSITATE EITHER A 3+2 AXIS MACHINING CENTER OR MULTIPLE SETUP OPERATIONS WITH PRECISE RE-FIXTURING.
- 3. CRITICAL ATTENTION MUST BE PAID TO THE 5-HOLE BOLT CIRCLE PATTERN (NOMINAL Ø4.0MM HOLES) TO ENSURE PRECISE POSITIONAL ACCURACY AND ANGULAR SPACING.
- 4. THE Ø22.0MM HOLE IS LIKELY A PRIMARY LOCATING OR CLEARANCE FEATURE AND SHOULD BE MACHINED TO SPECIFIED TOLERANCES FOR DIAMETER AND STRAIGHTNESS, POTENTIALLY REQUIRING REAMING OR BORING FOR ACCURACY.
- 5. A VARIETY OF HOLE DIAMETERS (4.0MM, 6.5MM, 8.0MM, 22.0MM) AND BLEND RADII (2.0MM, 3.25MM, 4.0MM) REQUIRE A COMPREHENSIVE TOOLING STRATEGY TO ENSURE EFFICIENT AND ACCURATE MACHINING WITHOUT EXCESSIVE TOOL CHANGES OR SPECIALIZED TOOLING.
- 6. THOROUGH DEBURRING OF ALL MACHINED EDGES, ESPECIALLY AT HOLE EXITS AND BLEND TRANSITIONS, IS ESSENTIAL TO PREVENT STRESS CONCENTRATIONS AND ENSURE SAFE HANDLING/ASSEMBLY. SURFACE FINISH FOR FUNCTIONAL SURFACES (E.G., THE Ø22.0MM BORE) SHOULD BE CAREFULLY CONTROLLED PER DESIGN REQUIREMENTS.

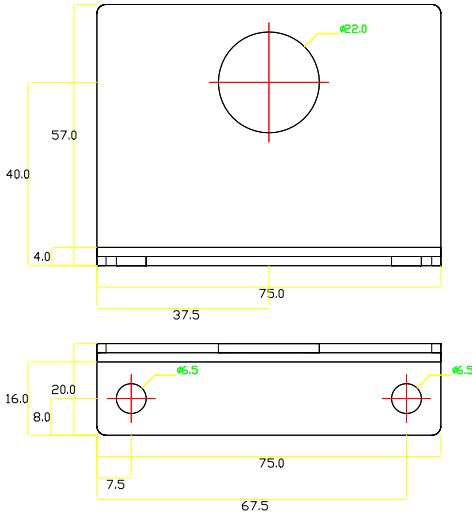

PART: MULTI-AXIS MOUNTING FLANGE

UNITS: MM

SCALE 1 : 1

DATE: 2026-05-25