




316 S. 6th Street,
St. Joseph, MO 64501 800. 821. 9013


Client	Install Location	Sales	Date: 6/2/24	Job #:
Maverik Erik Johnson	Maverik	John Boyd 970.390.6800 JohnB@Sunshine.US.com	Revisions:	Date:
Client Approval:		Date:		

10 INCH 3-PRICE W. NITRO

20 amp 120v circuit on 24 hours
connected to control boxes
Total current draw = 6 amps (by others)
MUST BE CLEAN CIRCUIT - DO NOT
SHARE NEUTRALS AND/OR COMMON
LEADS

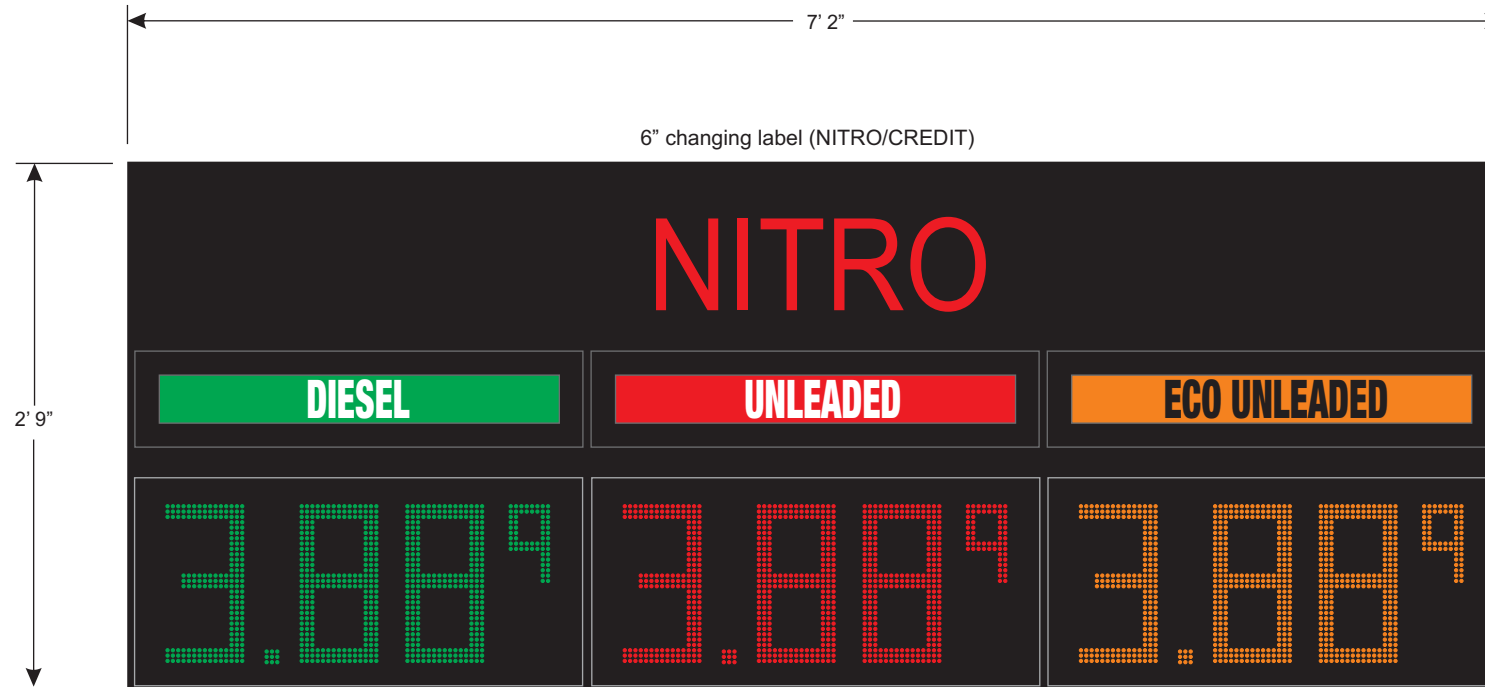

6" Programmable label

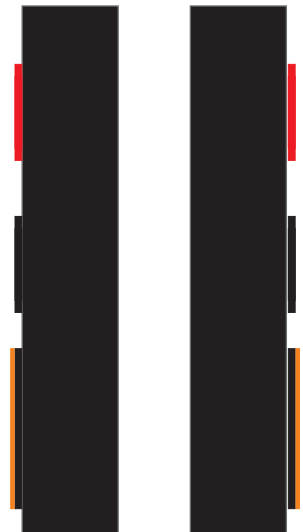

6" cabinet depth w. backs
Master/Master

- ☐ Same layout both sides
- ☒ Digits back to back

Cabinet Specs

Label Specs

Digit Size & Style: 10" LED
"ECO" Digit Color: Amber
"UNL" Digit Color: Red
"DSL" Digit Color: Green
Cabinet Size/Color: 2' 9" X 7' 2" X 6" / BLACK
S/F or D/F: D/F
Build Type: THRU POLE

LED Backlit Label Panel: 3" x 25"
Label Cap Height & Style: 2-1/2" HEL LT COND BLACK
"ECO" Label Panel Color: 3M 3630-25 Sunflower
"UNL" Label panel Color: 3M 3630-33 Red
"DSL" Label Panel Color: 3M 3936-26 Green
All Type Color: White

- ☒ Optimum digit spacing
- ☐ Minimum digit spacing
- ☐ Weld collars provided/pole specs by others
- ☒ Control box placement to be determined
- ☐ Label colors for representation only
- ☐ sq ft 20:

This original drawing is provided as part of a planned project and is not to be exhibited, copied or reproduced without the written permission of Sunshine Electronic Display Corporation or its authorized agent. All installation details are suggested only. All signs must be installed in accordance with NATIONAL, STATE, ELECTRICAL AND BUILDING CODES. Sunshine Electronic Display Corporation has no responsibility for wind loads, installations or electrical circuits. These are the sole responsibility of the Buyer/user. Actual LED size and conguration may vary

UL LISTED
UL STD 48
UL STD 1433
102482
CAN/CSA STD C22.2 NO. 207