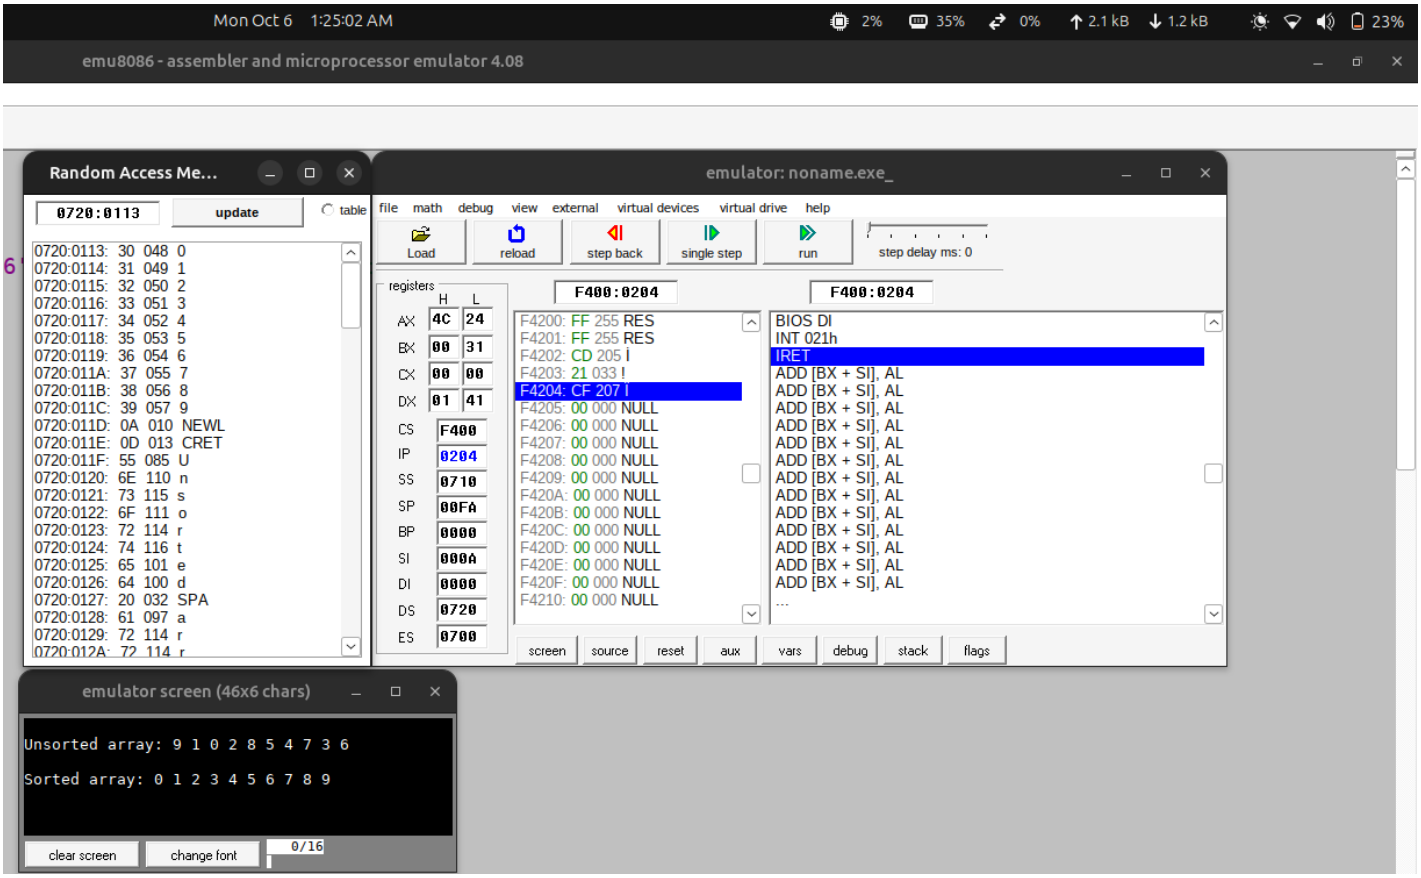
Mon Oct 6 1:25:02 AM
2% 35% 0% 2.1 kB 1.2 kB 23%
emu8086 - assembler and microprocessor emulator 4.08
Random Access Me...
0720:0113
update
table
0720:0113: 30 048 0
0720:0114: 31 049 1
0720:0115: 32 050 2
0720:0116: 33 051 3
0720:0117: 34 052 4
0720:0118: 35 053 5
0720:0119: 36 054 6
0720:011A: 37 055 7
0720:011B: 38 056 8
0720:011C: 39 057 9
0720:011D: 0A 010 NEWL
0720:011E: 0D 013 CRET
0720:011F: 55 085 U
0720:0120: 6E 110 n
0720:0121: 73 115 s
0720:0122: 6F 111 o
0720:0123: 72 114 r
0720:0124: 74 116 t
0720:0125: 65 101 e
0720:0126: 64 100 d
0720:0127: 20 032 SPA
0720:0128: 61 097 a
0720:0129: 72 114 r
emulator: noname.exe_
file math debug view external virtual devices virtual drive help
Load
reload
step back
single step
run
step delay ms: 0
registers
H L
AX 4C 24
BX 00 31
CX 00 00
DX 01 41
CS F400
IP 0204
SS 0710
SP 00FA
BP 0000
SI 000A
DI 0000
DS 0720
ES 0700
F400:0204
F4200: FF 255 RES
F4201: FF 255 RES
F4202: CD 205 Í
F4203: 21 033 !
F4204: CF 207 Ï
F4205: 00 000 NULL
F4206: 00 000 NULL
F4207: 00 000 NULL
F4208: 00 000 NULL
F4209: 00 000 NULL
F420A: 00 000 NULL
F420B: 00 000 NULL
F420C: 00 000 NULL
F420D: 00 000 NULL
F420E: 00 000 NULL
F420F: 00 000 NULL
F4210: 00 000 NULL
F400:0204
BIOS DI
INT 021h
IRET
ADD [BX + SI], AL
screen source reset aux vars debug stack flags
emulator screen (46x6 chars)
Unsorted array: 9 1 0 2 8 5 4 7 3 6
Sorted array: 0 1 2 3 4 5 6 7 8 9
clear screen
change font
0/16

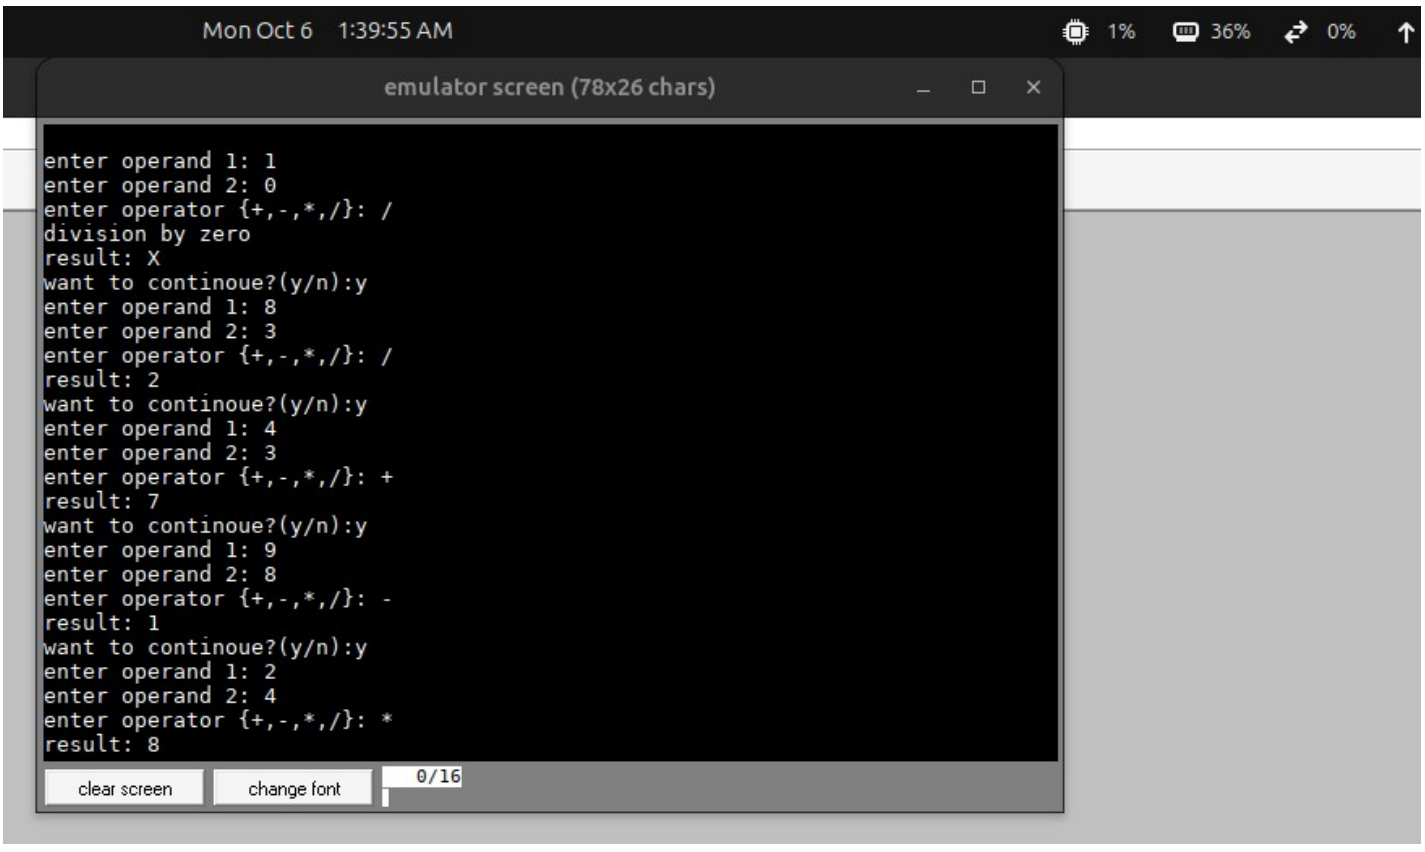
Mon Oct 6 1:39:55 AM
1% 36% 0%
emulator screen (78x26 chars)
enter operand 1: 1
enter operand 2: 0
enter operator {+,-,*,/}: /
division by zero
result: X
want to continoue?(y/n):y
enter operand 1: 8
enter operand 2: 3
enter operator {+,-,*,/}: /
result: 2
want to continoue?(y/n):y
enter operand 1: 4
enter operand 2: 3
enter operator {+,-,*,/}: +
result: 7
want to continoue?(y/n):y
enter operand 1: 9
enter operand 2: 8
enter operator {+,-,*,/}: -
result: 1
want to continoue?(y/n):y
enter operand 1: 2
enter operand 2: 4
enter operator {+,-,*,/}: *
result: 8
clear screen
change font
0/16