

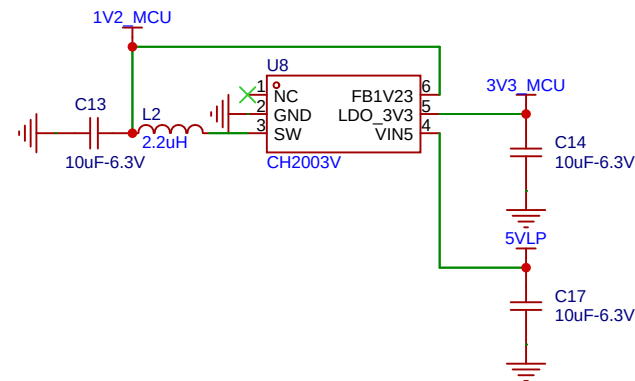
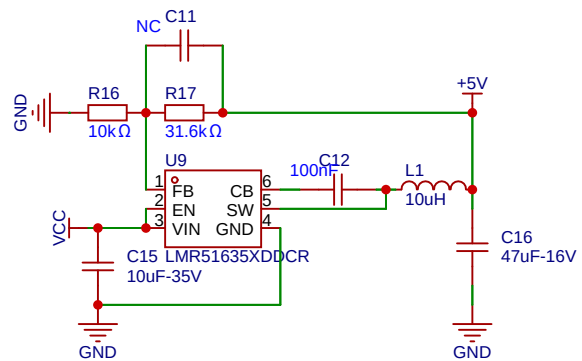


原理图	Schematic1			创建日期	2026-08-01
				更新日期	2026-08-01
板子	Board1			图页	P1
绘制				CH32H41x_RF_4.6.0	
审阅					
		版本	尺寸	页 0 共 1	
嘉立创EDA		V1.0	A4	嘉立创EDA	

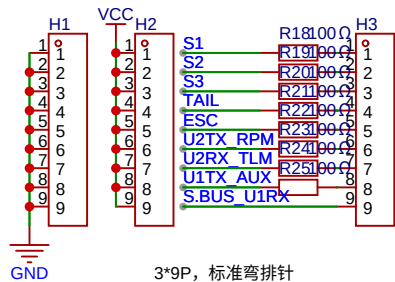


3*9P, 标准弯排针


Label	Pin1	Pin2	Pin3
S1	GND	VBEC	PE3
S2	GND	VBEC	PE4
S3	GND	VBEC	PE5
TAIL	GND	VBEC	PB11
ESC	GND	VBEC	PE6
RPM	GND	VBEC	PA2
TLM	GND	VBEC	PA3
AUX	GND	VBEC	PB6
SBUS	GND	VBEC	PB7

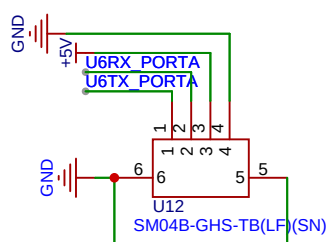




PortA(JST-GH)
Default FUNC : UART6
Reuse FUNC : 2*RPM or 2*ADC_Chx

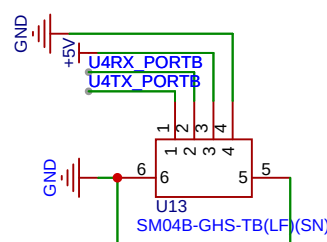


PortB(JST-GH)
Default FUNC : UART4
Reuse FUNC : 2*Timer_Chx

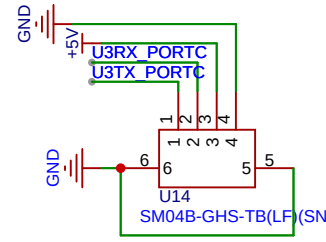


PortC(JST-GH)
Default FUNC : UART3

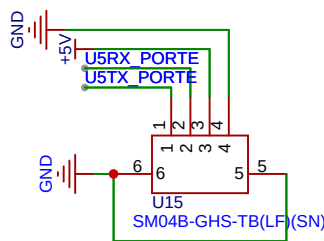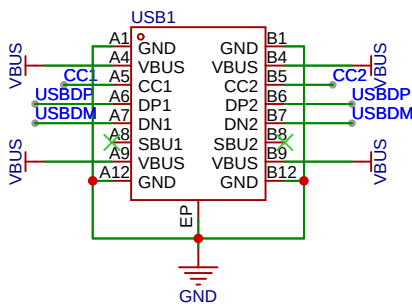


PortE(JST-GH)
Default FUNC : UART5
如果板载接收机, 该接口直接接到内部接收机, 常用于GPS+罗盘
去掉该接口

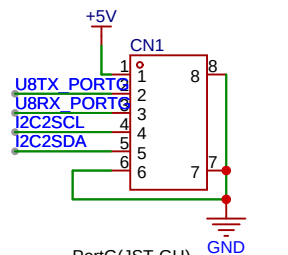


PortG(JST-GH)
Default FUNC : UART8+I2C

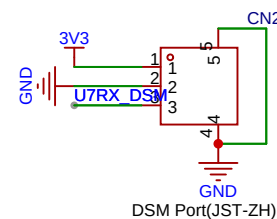


DSM Port(JST-ZH)

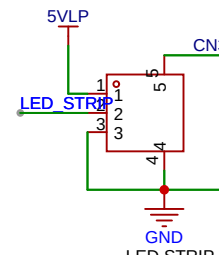

LED STRIP



电源电压回传采样



BEEPER

原理图	Schematic1			创建日期	2026-08-01
板子	Board1			更新日期	2026-08-01
绘制	CH32H41x_RF_4.6.0			图页	P1
审阅					
	版本	尺寸	页 0 共 2		
嘉立创EDA		V1.0	A4	嘉立创EDA	