PT SAPTAINDRA SEJATI

FINAL DRIVE

RECEIVING INSPECTION

CHECKSHEET

MACHINE MODEL

D375A-6R

RO NO :

POWERTRAIN SECTION

PT.SAPTA INDRA SEJATI
REBUILD CENTER

RECEIVING&DELIVERY INSPECTION SHEET FINAL DRIVE RH	MACHINE MODEL	D375A-5	REPORT NO.		DOCUMENT NO.	QR01-PT-027
	COMP. MODEL		COMP. S/N		PUBL. DATE	01/08/2008
	RECEIVING DATE		CUST.NAME		REVISION NO.	00
	DELIVERY DATE		WO NO.		PAGE	1 of 1

BELOW ARE THE ITEMS RELATED TO DELIVERY INSPECTION AND WHILE YOU DOING THIS INSPECTION JOB, PLEASE REFERRING TO THE REMANUFACTURED COMPONENTS - STANDARD CONFIGURATION.

✓ : GOOD CONDITION X : BAD CONDITION ⊗ : NONE

SKETCH DRAWING OR PHOTOES

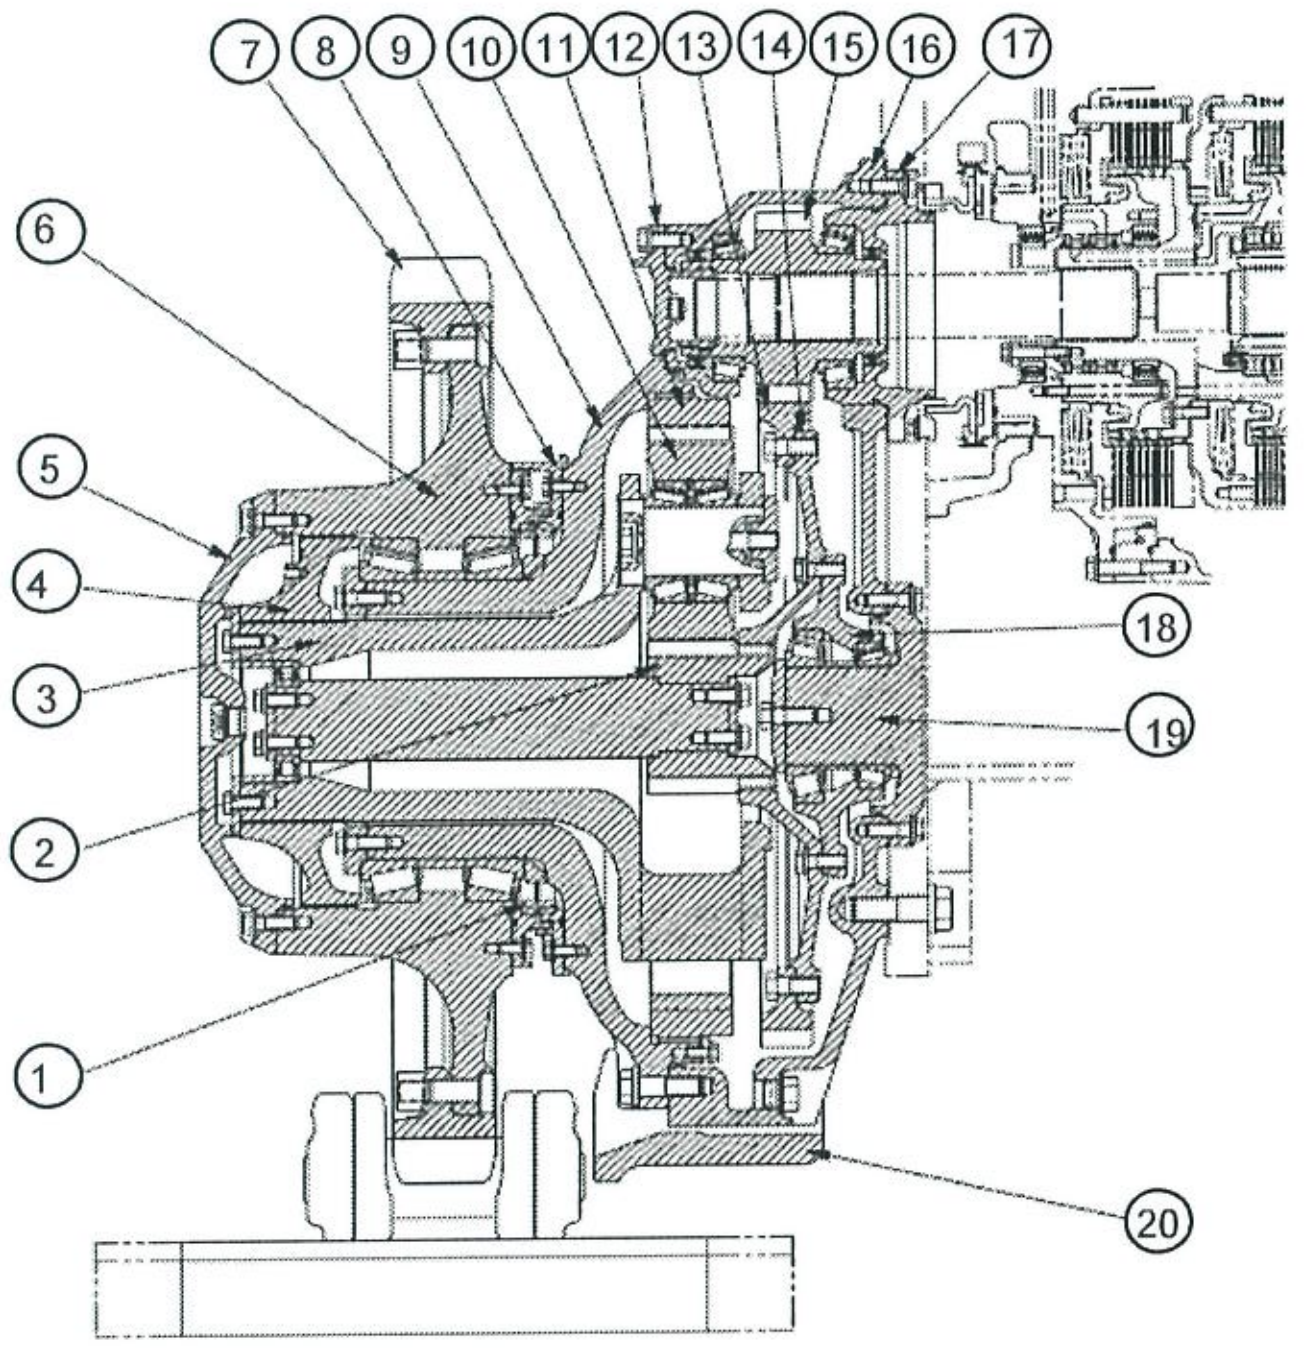



NO.	ITEM	INSPECTION CONDITION	CHECK IN	CHECK OUT
	Comp. Model			
	Aplication			
	Serial Number			
	Production No.			
1	Floating Seal			
2	Sun Gear (16 teeth)			
3	Carrier			
4	Hub			
5	Cover			
6	Sprocket Boss			
7	Sprocket teeth			
8	Floating Seal Guard			
9	Cover			
10	Planetary Pinion (26 teeth)			
11	Ring Gear (68 teeth)			
12	Cover			
13	No. 1 gear (79 teeth)			
14	No. 1 gear Hub			
15	No. 1 Pinion (20 teeth			
16	Final Drive Case			
17	Bearing Cage			
18	Boss			
19	Shaft			
20	Wear Guard			
21	Pivot Shaft			

NOTE : PLEASE MARK " ✓ " FOLLOWING TO THE ACTUAL CONDITION

OIL LEVEL	EMPTY OR DRAINED	
	PROPER LEVEL	

REMARKS :

Jakarta, ...

Inspected by,

Approved by,

QA.Inspector

GL/SPV

PT SAPTAINDRA SEJATI

FINAL DRIVE

DISASSEMBLY

CHECKSHEET

MACHINE MODEL

D375A-6R

RO NO :

POWERTRAIN SECTION

PT.SAPTA INDRA SEJATI
NAROGONG REBUILD CENTER

DISASSEMBLY CHECK SHEET	UNIT MODEL		WO NO.		NUMBER.DOC	QR02 - PT - 056
FINAL DRIVE RH	COMP. MODEL		REC.DATE		PUB.DATE	05/05/2001
D375A-5	COMP. S/N	D375A-5 RH	FINAL.INSP.		REV.NO	00
	SITE		DELIVERY DATE		PAGE	1 of 2

PROCESS	START		DISASSEMBLY BY	
	FINISH			

No	PARTS NAME	METHODE	CHECK POINT	EVALUATION ACTUAL	U/A	U/R	R/N	FIGURE OF PARTS TO BE CHECKED
1	PINION GEAR	VISUAL CHECK	Pitting / Crack / Abnormal wear on seal contact area (*used crack detector*). ***max wear : depth ≤ 0,1 mm*** ***width ≤ 0,5 mm*** Worn of spline area ***max wear less than 0,35 mm*** Measure thickness of shims ***std thickness = 2 mm***	CONTENTS CHECK / PERCENTAGE: Pitting: Crack: Scoring: Seal contact Depth: Seal contact Width: Spline worn: Shims thickness:				
2	HUB	VISUAL CHECK	Crack / Abnormal wear at spline area. (Inspection used Crack detector)					
3	BULL GEAR	VISUAL CHECK	Pitting / Crack / Scoring / Abnormal wear No damage at all of thread.	CONTENTS CHECK / PERCENTAGE: Pitting: Crack: Scoring:				
4	BOSS	VISUAL CHECK	Damage especially at bolt holes (worn, crack, check used crack detector) Inspect inside diameter of bearing seat	CONTENTS CHECK / PERCENTAGE: Worn: Crack:				
5	HUB	VISUAL CHECK	Damage especially at bolt holes (worn, crack, check used crack detector) Inspect inside spline area of drum. ***max wear less than 0,35 mm*** Abnormal wear at floating seal seat area.	CONTENTS CHECK / PERCENTAGE: Worn: Crack:				
6	CARRIER	VISUAL CHECK	Crack / Abnormal wear at spline area, Abnormal wear at hole shaft ***Max clearance = 0,05 mm*** (Inspection used Crack detector)	CONTENTS CHECK / PERCENTAGE: Worn: Crack:				
7	GEAR	VISUAL CHECK	Pitting / Crack / Scoring / Abnormal wear	CONTENTS CHECK / 1 / 2 / 3: Pitting: Crack: Scoring:				
8	SHAFT	VISUAL CHECK	Crack / Abnormal wear.	CONTENTS CHECK / 1 / 2 / 3: Wear: Crack:				
9	COVER	VISUAL CHECK	Crack, abnormal wear at bearing site. Damage at ring gear seat area. Thread condition	CONTENTS CHECK / PERCENTAGE: Worn: Crack: Thread:				
10	RING GEAR	VISUAL CHECK	Pitting / Crack / Scoring / Abnormal wear No damage at all of thread.	CONTENTS CHECK / PERCENTAGE: Pitting: Crack: Scoring:				

DISASSEMBLY CHECK SHEET	UNIT MODEL		WO NO.		NUMBER.DOC	QR02 - PT - 056
FINAL DRIVE RH	COMP. MODEL		REC.DATE		PUB.DATE	05/05/2001
D375A-5	COMP. S/N	D375A-5 RH	FINAL.INSP.		REV.NO	00
	SITE		DELIVERY DATE		PAGE	1 of 2

No	RTS NA	METHODE	CHECK POINT	EVALUATION ACTUAL	U/A	U/R	R/N	FIGURE OF PARTS TO BE CHECKED
11	CASE	VISUAL CHECK	Damage especially at bolt holes (worn, crack, check used crack detector) Inspect drain plug installation thread, and over wear at bottom case surface area.	CONTENTS CHECK / PERCENTAGE: Pitting: ; Crack: ; Worn:				
12	SHAFT	VISUAL CHECK	Alignment of shaft, measure at the lathe machine (***Std size less than 0,05 mm***)	Alignment of shaft:				
13	BOSS	VISUAL CHECK	Abnormal wear at bearing seat					
14	SUN GE	VISUAL CHECK	Pitting / Crack / Scoring / Abnormal wear	CONTENTS CHECK / PERCENTAGE: Pitting: ; Crack: ; Scoring:				 32
15	PLATE	VISUAL CHECK	Crack / Abnormal wear					
16	SHAFT	VISUAL CHECK	Abnormal wear at bearing seat					

ADDITIONAL SAMPLE OF FAILURE SIGN ABOUT GEAR, RUBBER BUSHING, AND E



PITTING : Pit-shaped peeling of tooth surface



SPALLING : Caused by the fatique crack



SCORING : Caused by contact between tooth metals



Identations : Damage by solid foreign objects



Extrusion, Crack, Peeling caused Deterioration



Flaxing : Caused Rolling Fatique, Over Load

NOTE

DISASSEMBLY BY,	APPROVED BY
(MECHANIC)	(SUPERVISOR)

AlamTri geo

PT SAPTAINDRA SEJATI

FINAL DRIVE

ASSEMBLY

CHECKSHEET

MACHINE MODEL

D375A-6R

RO NO :

POWERTRAIN SECTION

Check Sheet *Assembly*	PT SAPTAINDRA SEJATI REBUILD CENTER				QA - FORM :	
					JOB SITE :	
					UNIT CODE :	
LEMBAR KERJA PEMASANGAN	MODEL : D375 A – 5/6	WAKTU PROSES		TOTAL WAKTU	WO NO :	
	S / N :		TANGGAL	JAM		MEKANIK :	Paraf :
	COMP : FINAL DRIVE	START				DIKETAHUI :	Paraf :
	S / N :	FINISH					

GAMBAR KERJA	HAL-HAL YANG HARUS DIPERHATIKAN (URAIAN KERJA)	DIPERIKSA / CHECK ITEM





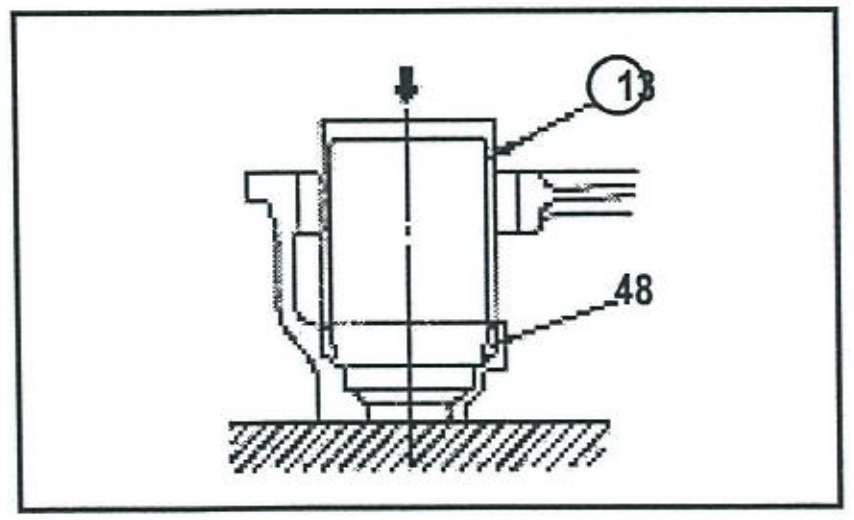

★ Pastikan semua component yang akan dipasang dalam keadaan bersih dari karat ,debu dan kering dari solar.

★ Perlu dilihat juga buku PK 2 ,SHOP MANUAL dan PSN , sebagai panduan pada saat akan melakukan pemasangan component.

1. Pasang oil Seal (50) dan (49) pada case, gunakan Push Tool 11 dan 12
   - Pasang Oil Seal bagian atas dengan sisi yang menerima Pressure menghadap keatas dan pasang Oil Seal bagian bawah dgn sisi yang menerima Pressure menghadap kebawah (Lihat PSN AT01033-14maret2001)).

⇨ Pres fit outer race (48) ,gunakan push tool 13

RANDOM ITEM CHECK	
Name :	Name :
QA INSPECTOR	PROD. SUPERVISOR

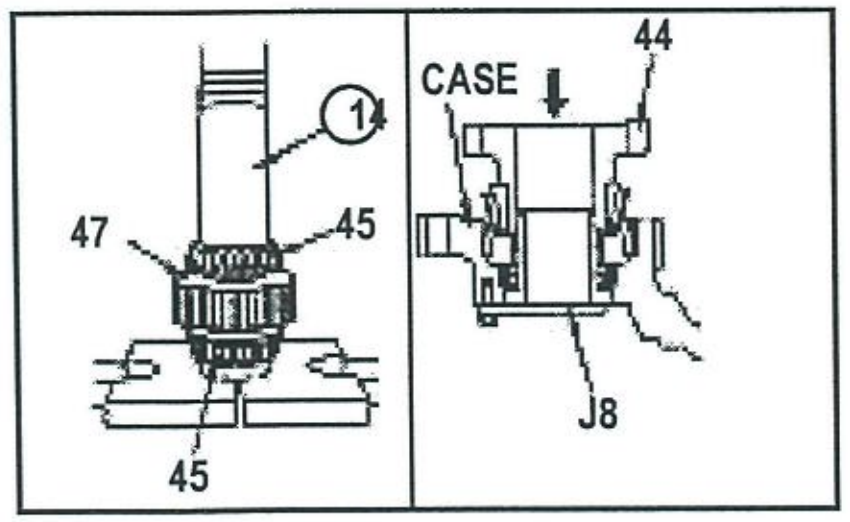

2. GEAR ASSEMBLY

⇨ Press Fit Bearing (45) dan (46) pada gear (47) ,gunakan push tool 14

⇨ Pasang tool J8 pada case dan pasang gear assembly (44).
   - Jangan dilepas tool J8 sampai cage terpasang.





3. Pasang oil Seal (43) dan (42) pada cage, gunakan Push Tool 11 dan 12
   - Pasang Oil Seal bagian atas dengan sisi yang menerima Pressure menghadap keatas dan pasang Oil Seal bagian bawah dgn sisi yang menerima Pressure menghadap kebawah .

Check Sheet *Assembly*	PT SAPTAINDRA SEJATI REBUILD CENTER				QA - FORM :
					JOB SITE :
					UNIT CODE :
LEMBAR KERJA PEMASANGAN	MODEL : D375 A – 5/6 S / N :	WAKTU PROSES		TOTAL WAKTU	WO NO :
			TANGGAL / JAM		MEKANIK : Paraf :
	COMP : FINAL DRIVE	START			DIKETAHUI : Paraf :
	S / N :	FINISH			

GAMBAR KERJA	HAL-HAL YANG HARUS DIPERHATIKAN (URAIAN KERJA)	DIPERIKSA / CHECK ITEM
	⇨ Press fit bearing outer race (41) ,gunakan push tool 15 ⇨ Pasang Cage (39) ke Case dan kencangkan Bolt STANDRAD: 1.5 kgm — ACTUAL (Kgm): • Putar Gear dan kencangkan yang rata dan lepas Tool J8	
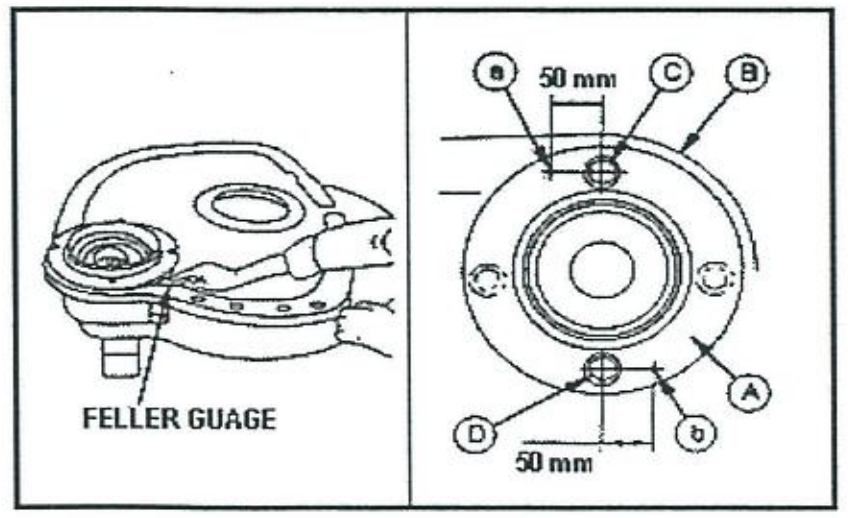	⇨ Ukur clearance a dan b antara cage A dan case B dengan feeler gauge ⇨ Pasang Shim (c) sesuai kebutuhan dan kencangkan Cage Mounting Bolt. • Lihat tahel shim pada shop manual hal.30 -174 . STANDRAD: 11.5 ± 1.25 kgm — ACTUAL (Kgm): • Setelah terpasang (shim) ,check putaran gear harus smoothly.	RANDOM ITEM CHECK Name : — QA INSPECTOR Name : — PROD. SUPERVISOR
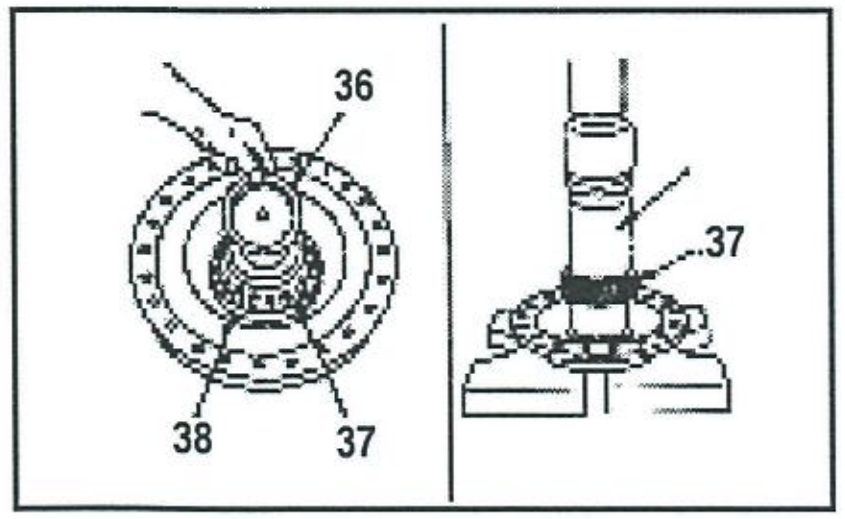	4. HUB DAN SHAFT ASSEMBLY ⇨ Pasang collar (38) ,press fit bearing (37) dan pasang collar (36).	
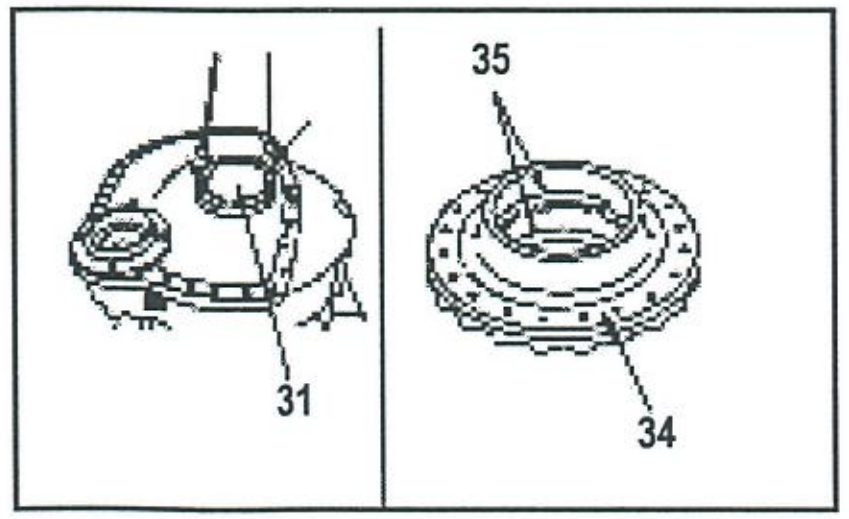	⇨ Fit O-ring ,pasang shaft assembly (31) pada case ⇨ Press fit outer race (35) pada boss (34) dan pasang boss (103) pada hub (102).	

Check Sheet *Assembly*	PT SAPTAINDRA SEJATI REBUILD CENTER				QA - FORM :	
					JOB SITE :	
					UNIT CODE :	
LEMBAR KERJA PEMASANGAN	MODEL : D375 A – 5/6 S / N :	WAKTU PROSES		TOTAL WAKTU	WO NO :	
			TANGGAL / JAM		MEKANIK :	Paraf :
	COMP : FINAL DRIVE	START				
	S / N :	FINISH			DIKETAHUI :	Paraf :

GAMBAR KERJA	HAL-HAL YANG HARUS DIPERHATIKAN (URAIAN KERJA)	DIPERIKSA / CHECK ITEM

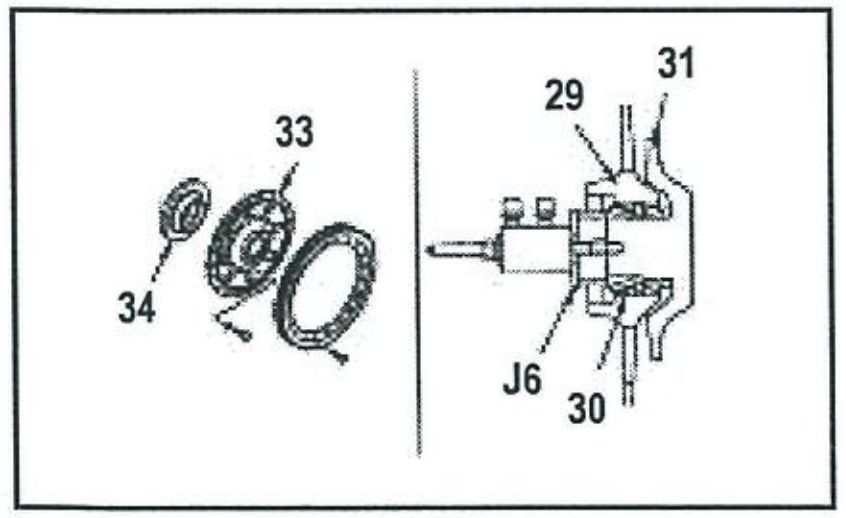

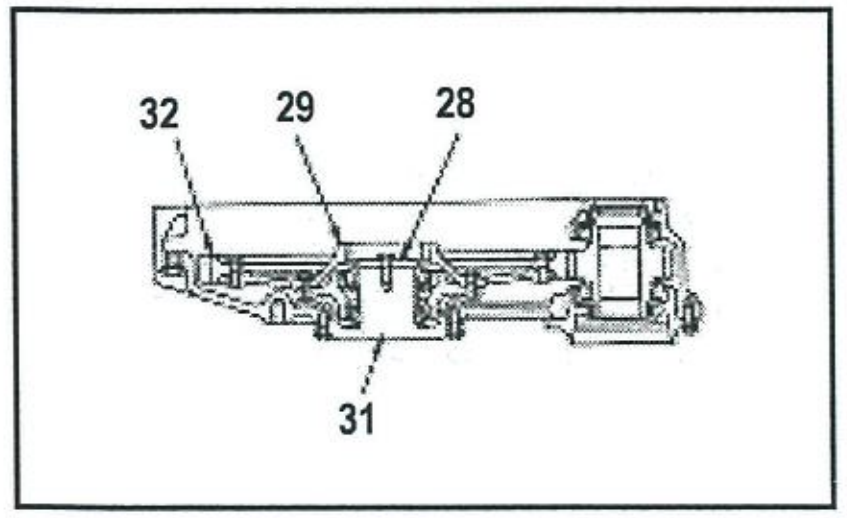

⇨ Pasang boss (34 pada hub (33)

⇨ Pasang shaft assembly (31) dan hub assembly (29) ,

⇨ Gunakan tool J6 ,Press fit bearing (30)
Kencangkan bolts hub assembly (29)

STANDARD	ACTUAL
28.25 ± 3.25 Kgm	Kgm

⇨ Pasang plate (28) ,kencangkan bolt (gunakan thread tightener LT-2)

STANDARD	ACTUAL
56 ± 6 Kgm	Kgm

⇨ Pasang gear (32) ,kencangkan bolt.

STANDARD	ACTUAL
55 ± 5 Kgm	Kgm

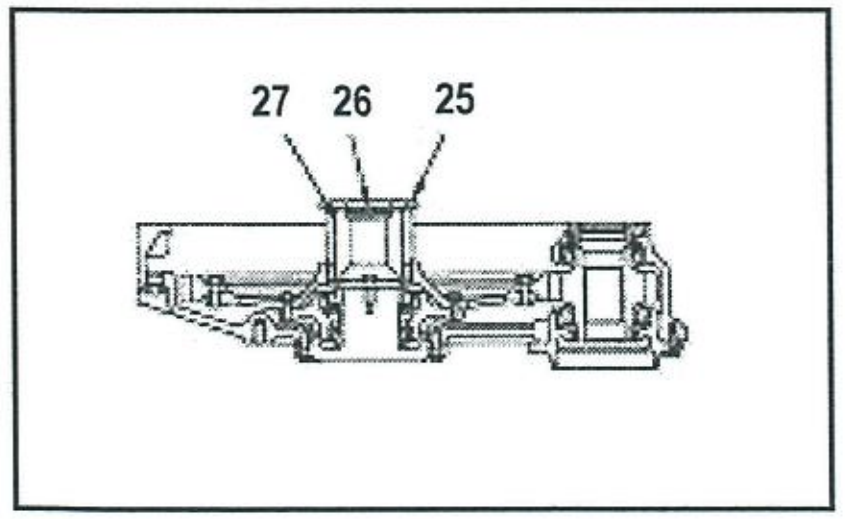

5. PASANG SUN GEAR DAN SHAFT ASSEMBLY

⇨ Pasang sun gear (27) pada hub assembly

⇨ Pasang button (26) dan plate (25)





6. PASANG CARRIER ASSEMBLY

⇨ Pasang ring dan spacer pada planetary gear,kemudian gunakan push tool 18 ,press fit bagian atas dan bawah bearing outer race (24D)

- Luruskan tanda distinguishing pada inner race ,outer race dan spacer pada saat assembly.

Check Sheet *Assembly*	PT SAPTAINDRA SEJATI REBUILD CENTER				QA - FORM :
					JOB SITE :
					UNIT CODE :
LEMBAR KERJA PEMASANGAN	MODEL : D375 A – 5/6 S / N :	WAKTU PROSES		TOTAL WAKTU	WO NO :
			TANGGAL	JAM	
	COMP : FINAL DRIVE	START			MEKANIK : Paraf :
	S / N :	FINISH			DIKETAHUI : Paraf :

GAMBAR KERJA	HAL-HAL YANG HARUS DIPERHATIKAN (URAIAN KERJA)	DIPERIKSA / CHECK ITEM
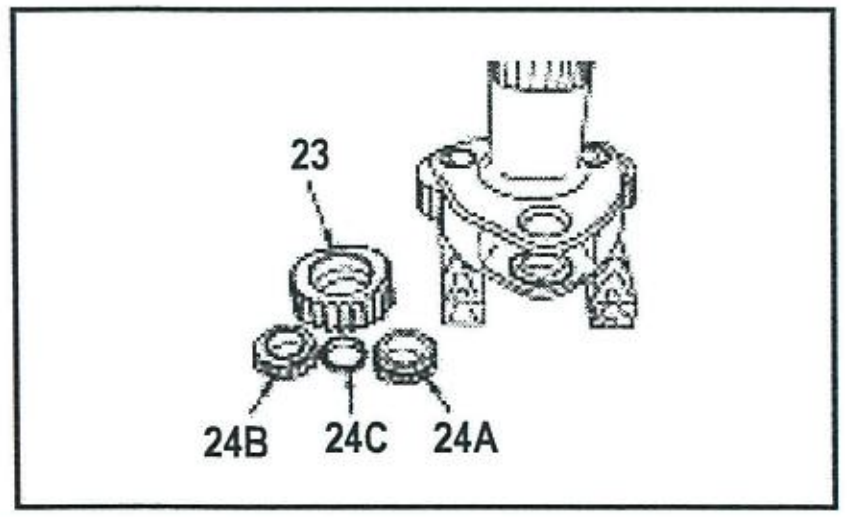	⇨ Pasang spacer (24C) dan bearing inner race (24B) dab (24A) pada planetary gear (23)	
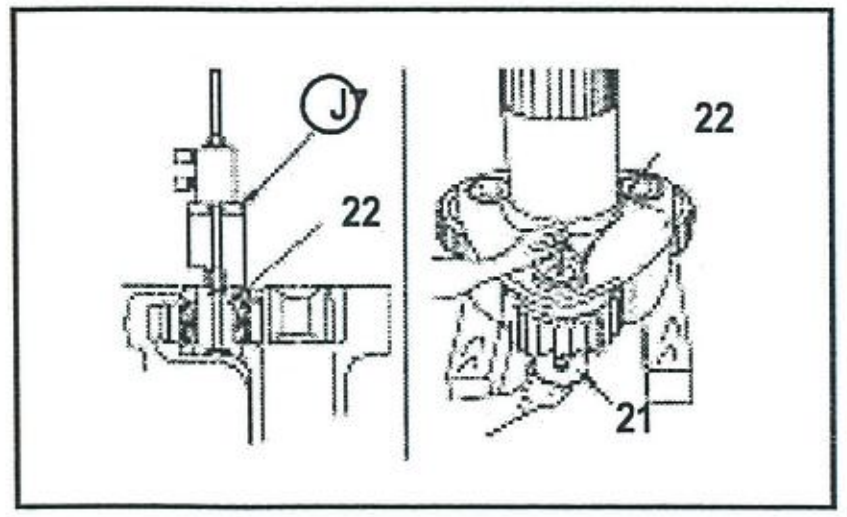	⇨ Press Fit planetary gear shaft (22) ,gunakan Tool J7 • Luruskan shaft dengan posisi lubang pada bearing dan spacer ,kemudian press. ⇨ Pasang holder (21) .torque bolt. STANDARD: 56 ± 6 Kgm — ACTUAL: Kgm • Setelah bolt ditorque ,check putaran gear harus smoothly.	
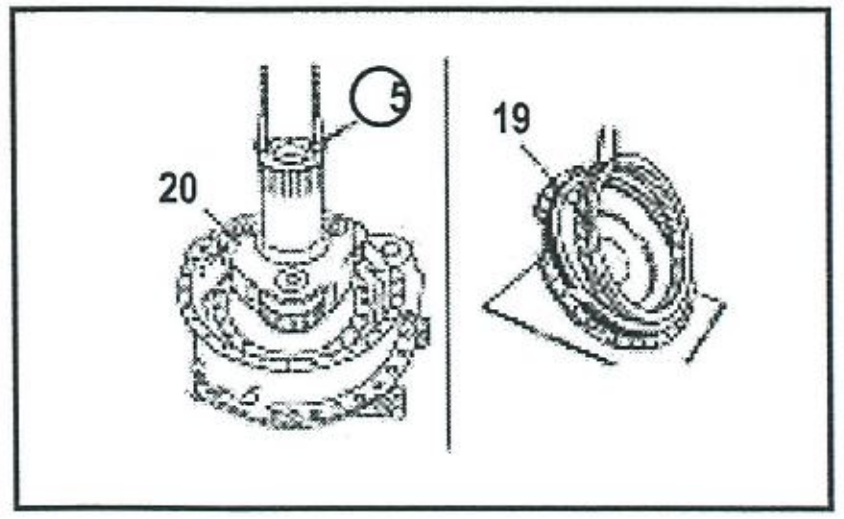	⇨ Pasang carrier assembly (20) . 7. Cover assembly ⇨ Fit ring gear (19) dan pasang plate. • Pasang plate dengan chamfered disebelah atas.	
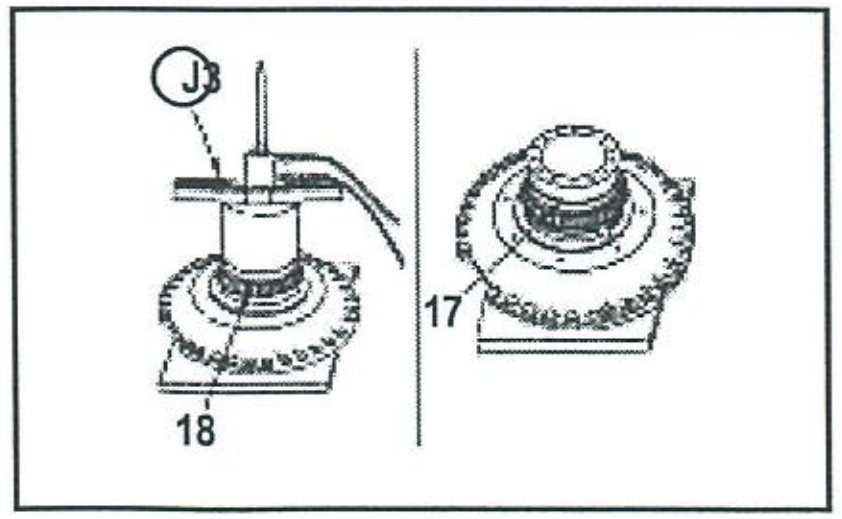	⇨ Gunakan tool J3,press fit bearing inner race (18) dan pasang spacer (17)	

STANDARD	ACTUAL
56 ± 6 Kgm	Kgm

Check Sheet *Assembly*	PT SAPTAINDRA SEJATI REBUILD CENTER				
LEMBAR KERJA PEMASANGAN	MODEL : D375 A – 5/6 S / N :	WAKTU PROSES	TANGGAL	JAM	TOTAL WAKTU
	COMP : FINAL DRIVE	START			
	S / N :	FINISH			

QA - FORM	:		
JOB SITE	:		
UNIT CODE	:		
WO NO	:		
MEKANIK	:	Paraf	:
DIKETAHUI	:	Paraf	:

GAMBAR KERJA	HAL-HAL YANG HARUS DIPERHATIKAN (URAIAN KERJA)	DIPERIKSA / CHECK ITEM
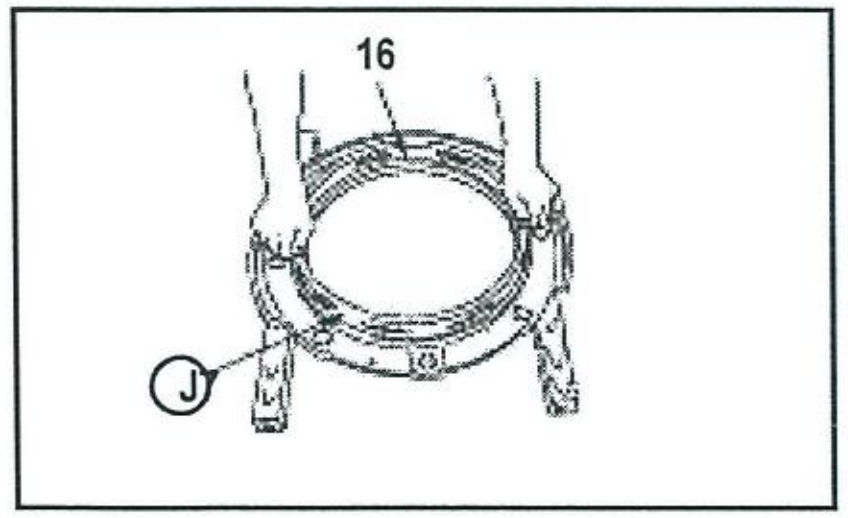	⇨ Gunakan tool J4 ,press fit floating seal (16) pada floating seal cover • Pastikan O-ring bersih dan kering sebelum dipasang. • Sesudah floating seal terpasang check kemiringannya tidak lebih 1mm	RANDOM ITEM CHECK Name : / Name : QA INSPECTOR / PROD. SUPERVISOR
 	⇨ Pasang floating seal cover (15) . • Pasang agar pada bagian yang terpotong pada floating gasket sealant cover menghadap kebawah ,lihat gambar.	
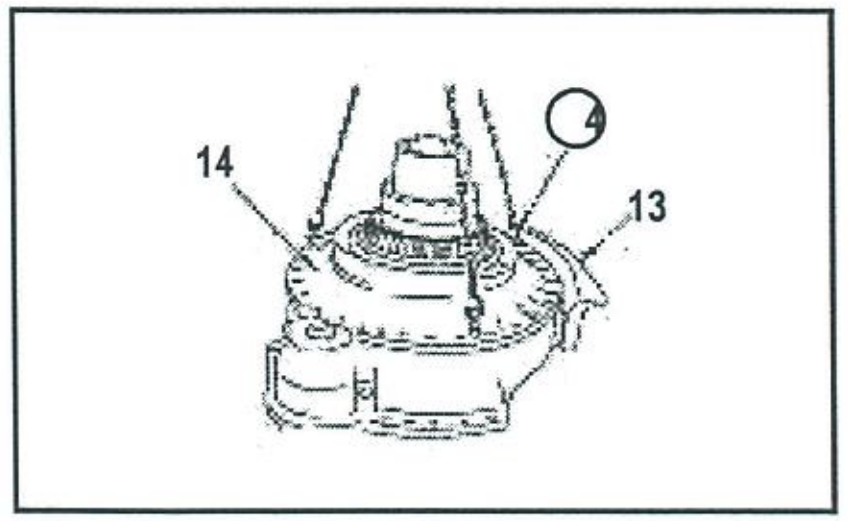	⇨ Pasang cover assembly (14) pada case ,kemudian torque bolts • Lumasi kedua permukaan cover dan case dengan gasket sealant. STANDARD: 56 ± 6 Kgm — ACTUAL: Kgm 8. Pasang wear guard (13) , torque bolt	

STANDARD	ACTUAL
56 ± 6 Kgm	Kgm

Check Sheet *Assembly*	PT SAPTAINDRA SEJATI REBUILD CENTER					QA - FORM :
						JOB SITE :
						UNIT CODE :
LEMBAR KERJA PEMASANGAN	MODEL : D375 A – 5/6 S / N :	WAKTU PROSES			TOTAL WAKTU	WO NO :
			TANGGAL	JAM		
	COMP : FINAL DRIVE	START				MEKANIK : Paraf :
	S / N :	FINISH				DIKETAHUI : Paraf :

GAMBAR KERJA	HAL-HAL YANG HARUS DIPERHATIKAN (URAIAN KERJA)	DIPERIKSA / CHECK ITEM
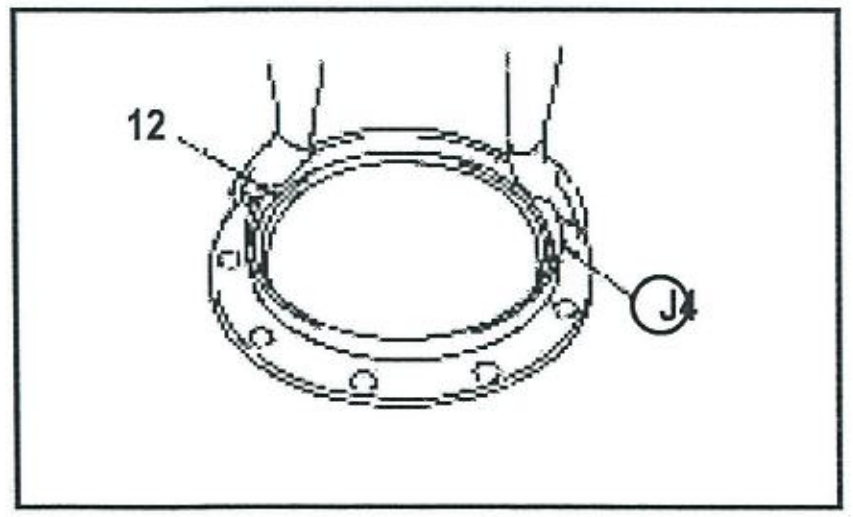	9. SprocketT hub assembly. ⇨ Gunakan tool J4 ,pasang floating seal (12) pada floating seal cover • Pastikan O-ring bersih dan kering sebelum dipasang. • Sesudah floating seal terpasang check kemiringannya tidak lebih 1mm	RANDOM ITEM CHECK Name : / Name : QA INSPECTOR / PROD. SUPERVISOR
 	⇨ Press fit bearing outer races (11) dan (10). ⇨ Pasang floating seal cover (9) dan pasang bearing (8) pada sprocket hub assembly.	
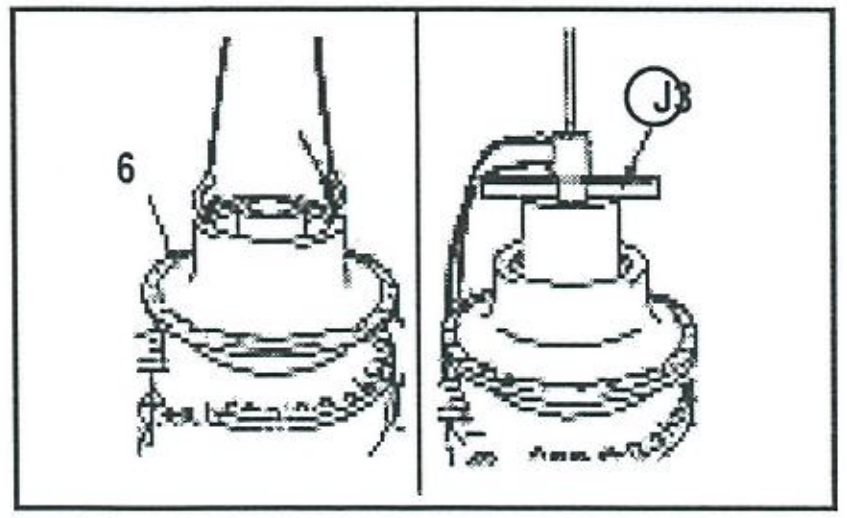 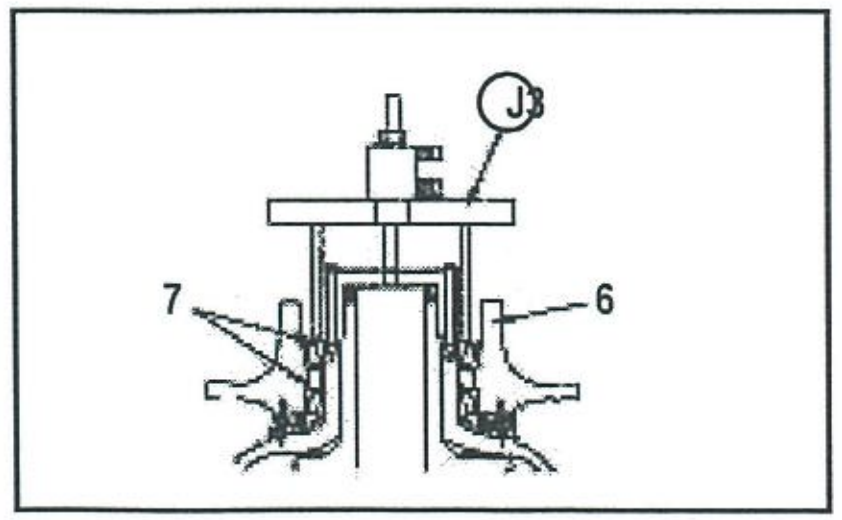	⇨ Pasang sprocket hub assembly (6) pada cover • Pastikan permukaan yang bergesekan pada floating seal bersih ,kemudian oleskan dengan engine oil secukupnya. ⇨ Gunakan tool J3 ,press fit bearing (7). • Putar sprocket hub assembly setelah dilakukan press.	

Check Sheet *Assembly*	PT SAPTAINDRA SEJATI REBUILD CENTER	QA - FORM :
		JOB SITE :
		UNIT CODE :

LEMBAR KERJA PEMASANGAN	MODEL : D375 A – 5/6 S / N :	WAKTU PROSES			TOTAL WAKTU	WO NO :
			TANGGAL	JAM		MEKANIK : Paraf :
	COMP : FINAL DRIVE	START				
	S / N :	FINISH				DIKETAHUI : Paraf :

GAMBAR KERJA	HAL-HAL YANG HARUS DIPERHATIKAN (URAIAN KERJA)	DIPERIKSA / CHECK ITEM
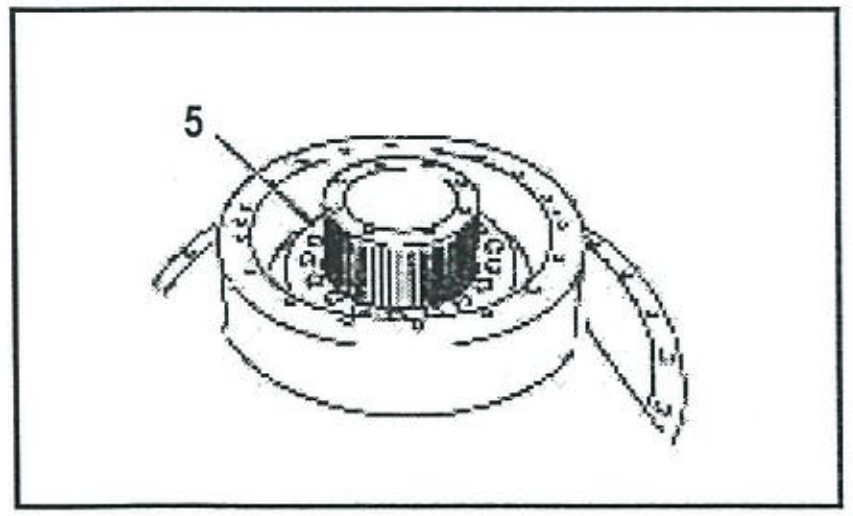	⇨ Pasang Holder (5) dan kencangkan Bolt (gunakan thread tightener LT-2) STANDARD: 28.25 ± 3.25 Kgm ACTUAL: Kgm	
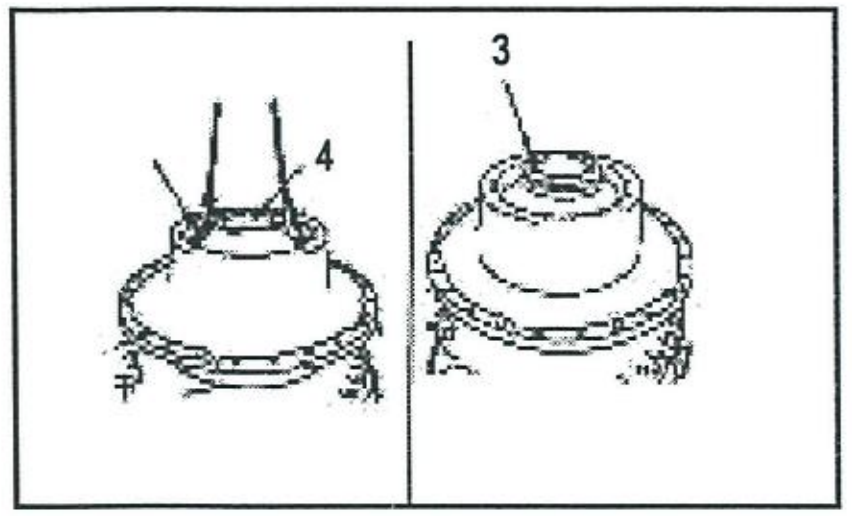	10. Pasang Hub (4) dan Plate (3), kemudian kencangkan Bolt STANDARD: 28.25 ± 3.25 Kgm ACTUAL: Kgm	
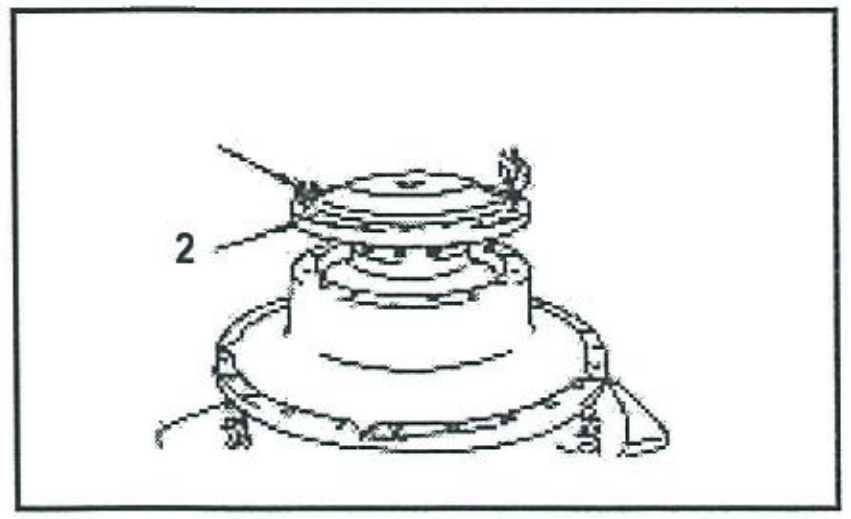	⇨ Pasang cover (2) dan kencangkan bolts STANDARD: 28.25 ± 3.25 Kgm ACTUAL: Kgm	
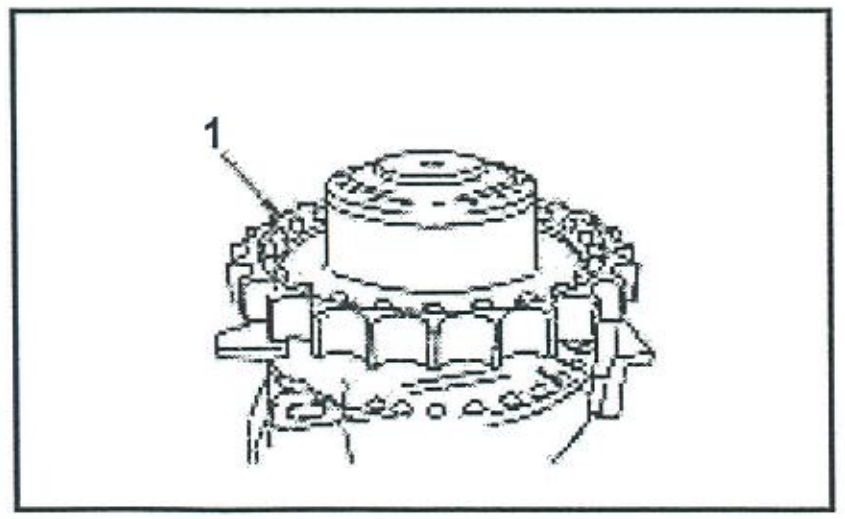	⇨ Pasang sprocket (1) dan kencangkan bolts (gunakan thread tightener LT-2) STANDARD: 185 ± 10 Kgm ACTUAL: Kgm	

PT SAPTAINDRA SEJATI

STEERING & BRAKE ASSEMBLY

CHECKSHEET

MACHINE MODEL

D375A-6R

RO NO :

POWERTRAIN SECTION

PT SAPTAINDRA SEJATI
NAROGONG REBUILD CENTER

<table>
<tr><td rowspan="4">ASSEMBLY CHECK SHEET
STEERING & BRAKE
BULLDOZER (D375A SERIES)</td><td>WO NUMBER</td><td></td><td>DOC.NO.</td><td></td></tr>
<tr><td>COMP. MODEL</td><td></td><td>PUB. DATE</td><td>14/05/ 2010</td></tr>
<tr><td>COMP. S/N</td><td></td><td>REV. NO</td><td>00</td></tr>
<tr><td>MACHINE MODEL</td><td></td><td>PAGE</td><td>1 of 3</td></tr>
</table>

<table>
<tr><td rowspan="2">PROCESS</td><td>START</td><td></td><td rowspan="2">ASSEMBLY BY</td><td rowspan="2"></td></tr>
<tr><td>FINISH</td><td></td></tr>
</table>

<table>
<tr><th rowspan="2">NO</th><th rowspan="2">PARTS</th><th rowspan="2">CHECK POINT</th><th rowspan="2">SPECIFICATION</th><th colspan="3">SIGN</th><th rowspan="2">FIGURE OF PARTS TO BE CHECKED</th></tr>
<tr><th>MEC</th><th>SPV</th><th>QA</th></tr>
<tr><td rowspan="3">1</td><td rowspan="3">CLUTCH BRAKE ASSEMBLY</td><td>- Put the beleville springs to back side when installing
- Torque pins shorter than steering clutch torque pins</td><td><table><tr><td>- Brake Clutch</td><td>Free Lenght</td><td>No. s Of Spring</td></tr><tr><td>Brake Spring</td><td>17.1 mm</td><td>3 Pcs</td></tr></table></td><td></td><td></td><td></td><td></td></tr>
<tr><td>- Avoid seal ring lip of seal ring (grease) from damage
- Torque Bolt Cage
Act : kgm</td><td>- Thread Tightener LT2
- Std Torque :
11 ~ 12.5 Kgm</td><td></td><td></td><td></td><td></td></tr>
<tr><td>- Coat thinly with engine oil and assy
- Torque Bolt Stopper
Act : kgm</td><td>- Thread Tightener LT2
- Std Torque :
28.25 ± 3.25Kgm</td><td></td><td></td><td></td><td></td></tr>
<tr><td rowspan="2">2</td><td rowspan="2">CLUTCH ASSEMBLY</td><td>- Torque Bolt Ring Gear
Act : kgm</td><td>- Thread Tightener LT2
- Std Torque :
18 ± 2 Kgm
- Press fit or Heat 110⁰C ~ 120⁰C</td><td></td><td></td><td></td><td></td></tr>
<tr><td>Put the bellevillle spring back to back side when installing
- Avoid seal ring lip of seal ring (grease) from damage</td><td><table><tr><td>S/ Clutch</td><td>Free Lenght</td><td>No. s Of Spring</td></tr><tr><td>S/ Spring</td><td>17.6 mm</td><td>2 Pcs</td></tr></table></td><td></td><td></td><td></td><td></td></tr>
</table>

RANDOM ITEM CHECK
Name : | Name :
QA INSPECTOR | PROD. SUPERVISOR

PT SAPTAINDRA SEJATI
NAROGONG REBUILD CENTER

ASSEMBLY CHECK SHEET **STEERING & BRAKE** BULLDOZER (D375A SERIES)				
	WO NUMBER		DOC.NO.	
	COMP. MODEL		PUB. DATE	14/05/ 2010
	COMP. S/N		REV. NO	00
	MACHINE MODEL		PAGE	2 of 3

NO	PARTS	CHECK POINT	SPECIFICATION	SIGN MEC	SIGN SPV	SIGN QA	FIGURE OF PARTS TO BE CHECKED
		- Avoid seal ring lip of seal ring (grease) from damage					
		- Torque Nut Act : kgm - Torque Bolt lock Nut Act : kgm - Torque Bolt Cage Act : kgm - Torque Bolt Ring Gear Act : kgm	- Thread Tightener LT2 - Std Torque : 25 ± 1.5 Kgm - Thread Tightener LT2 - Std Torque : 2.5 ± 1.5 Kgm - Thread Tightener LT2 - Std Torque : 11.25 ± 1.25 Kgm - Thread Tightener LT2 - Std Torque : 6.75 ± 0.75 Kgm				  
		- Check that ring gear rotates smoothly - Torque Pins longer than Brake Clutch Torque Pins	- Coat Thinly with engine oil when assembly				
		- Torque Bolt stopper Steering Act : kgm - Torque Bolt Plate Sleeve Act : kgm	- Thread Tightener LT2 - Std Torque : 28.25 ± 3.25 Kgm - Press fit or Heat 110⁰C ~ 120⁰C - Thread Tightener LT2 - Std Torque : 11.25± 1.25 Kgm				

RANDOM ITEM CHECK

Name :	Name :
QA INSPECTOR	PROD. SUPERVISOR

PT SAPTAINDRA SEJATI
NAROGONG REBUILD CENTER

ASSEMBLY CHECK SHEET **STEERING & BRAKE** BULLDOZER (D375A SERIES)	WO NUMBER		DOC.NO.	
	COMP. MODEL		PUB. DATE	14/05/ 2010
	COMP. S/N		REV. NO	00
	MACHINE MODEL		PAGE	3 of 3

Notes :

ASSEMBLY BY	INSPECTED & APPROVED BY	
(MECHANIC)	(QA)	(SUPERVISOR)

PT SAPTAINDRA SEJATI
NAROGONG REBUILD CENTER

DELIVERY INSPECTION CHECKSHEET FINAL DRIVE	MACHINE MODEL	D375A-6	INSP. DATE		DOCUMENT NO.	
	COMP. MODEL	FINAL DRIVE	DELIVERY DATE		PUBL. DATE	
	COMP. S/N		WO NO		REVISION NO.	01
	PART ASSY NO.		JOBSITE		PAGE	1 of 1

BELOW ARE THE ITEMS RELATED TO DELIVERY INSPECTION AND WHILE YOU DOING THIS INSPECTION JOB, PLEASE REFERRING TO THE REMANUFACTURED COMPONENTS - STANDARD CONFIGURATION.

✓ : GOOD CONDITION X : BAD CONDITION ⊗ : NONE

SKETCH DRAWING OR PHOTOES

Rear Side View

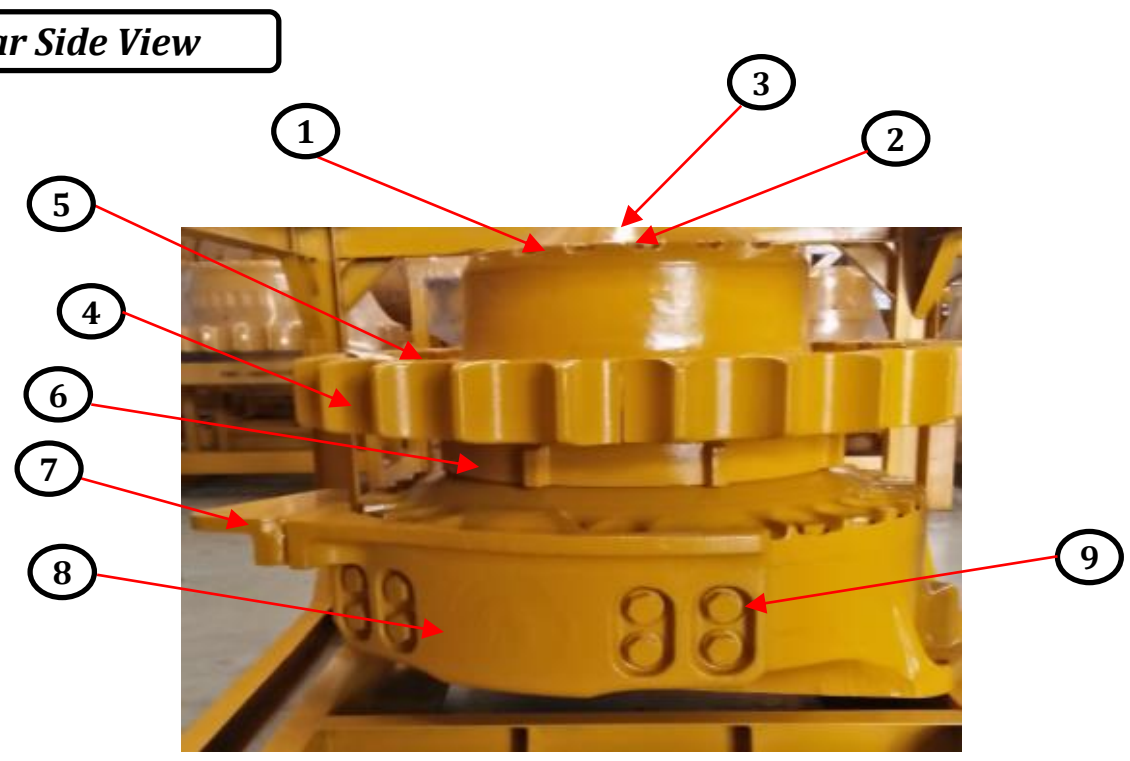

Front Side View

NOTE : PLEASE MARK " ✓ " FOLLOWING TO THE ACTUAL CONDITION

OIL LEVEL	EMPTY OR DRAINED	
	PROPER LEVEL	

NO.	ITEM	CHECK	REMARKS
1	Cover		
2	Bolt Cover		
3	Oil Level Plug		
4	Sprocket		
5	Bolt Sprocket		
6	Retainer		
7	Rock Destroyer		
8	Guard		
9	Bolt Muonting Guard		
10	Cover Input Shaft		
11	Bolt Cover		
12	Painting		
13	Name Plate		
14	Stiker Oil Checking		
15	Stand		

Inspected by,

QA Inspector

Approved by,

QA Coordinator